


产品特点:

Product features:

- 可靠、有保障的专利技术
 - 节省室内空间的折门系统
 - 两门最大负重: 40kg
 - 门板厚度: 36-40mm
 - 通过20万次开关测试
 - 适用室内门, 厨房门、客厅门、饭厅门、浴室门等等
- Reliable and guaranteed patented technology
 - Folding door system for saving indoor space
 - Maximum load: 40kg
 - Door panel thickness: 36-40mm
 - 200000 switch tests passed
 - Applicable to indoor doors, Kitchen doors, Living room door, Dining room door, Bathroom door, wait

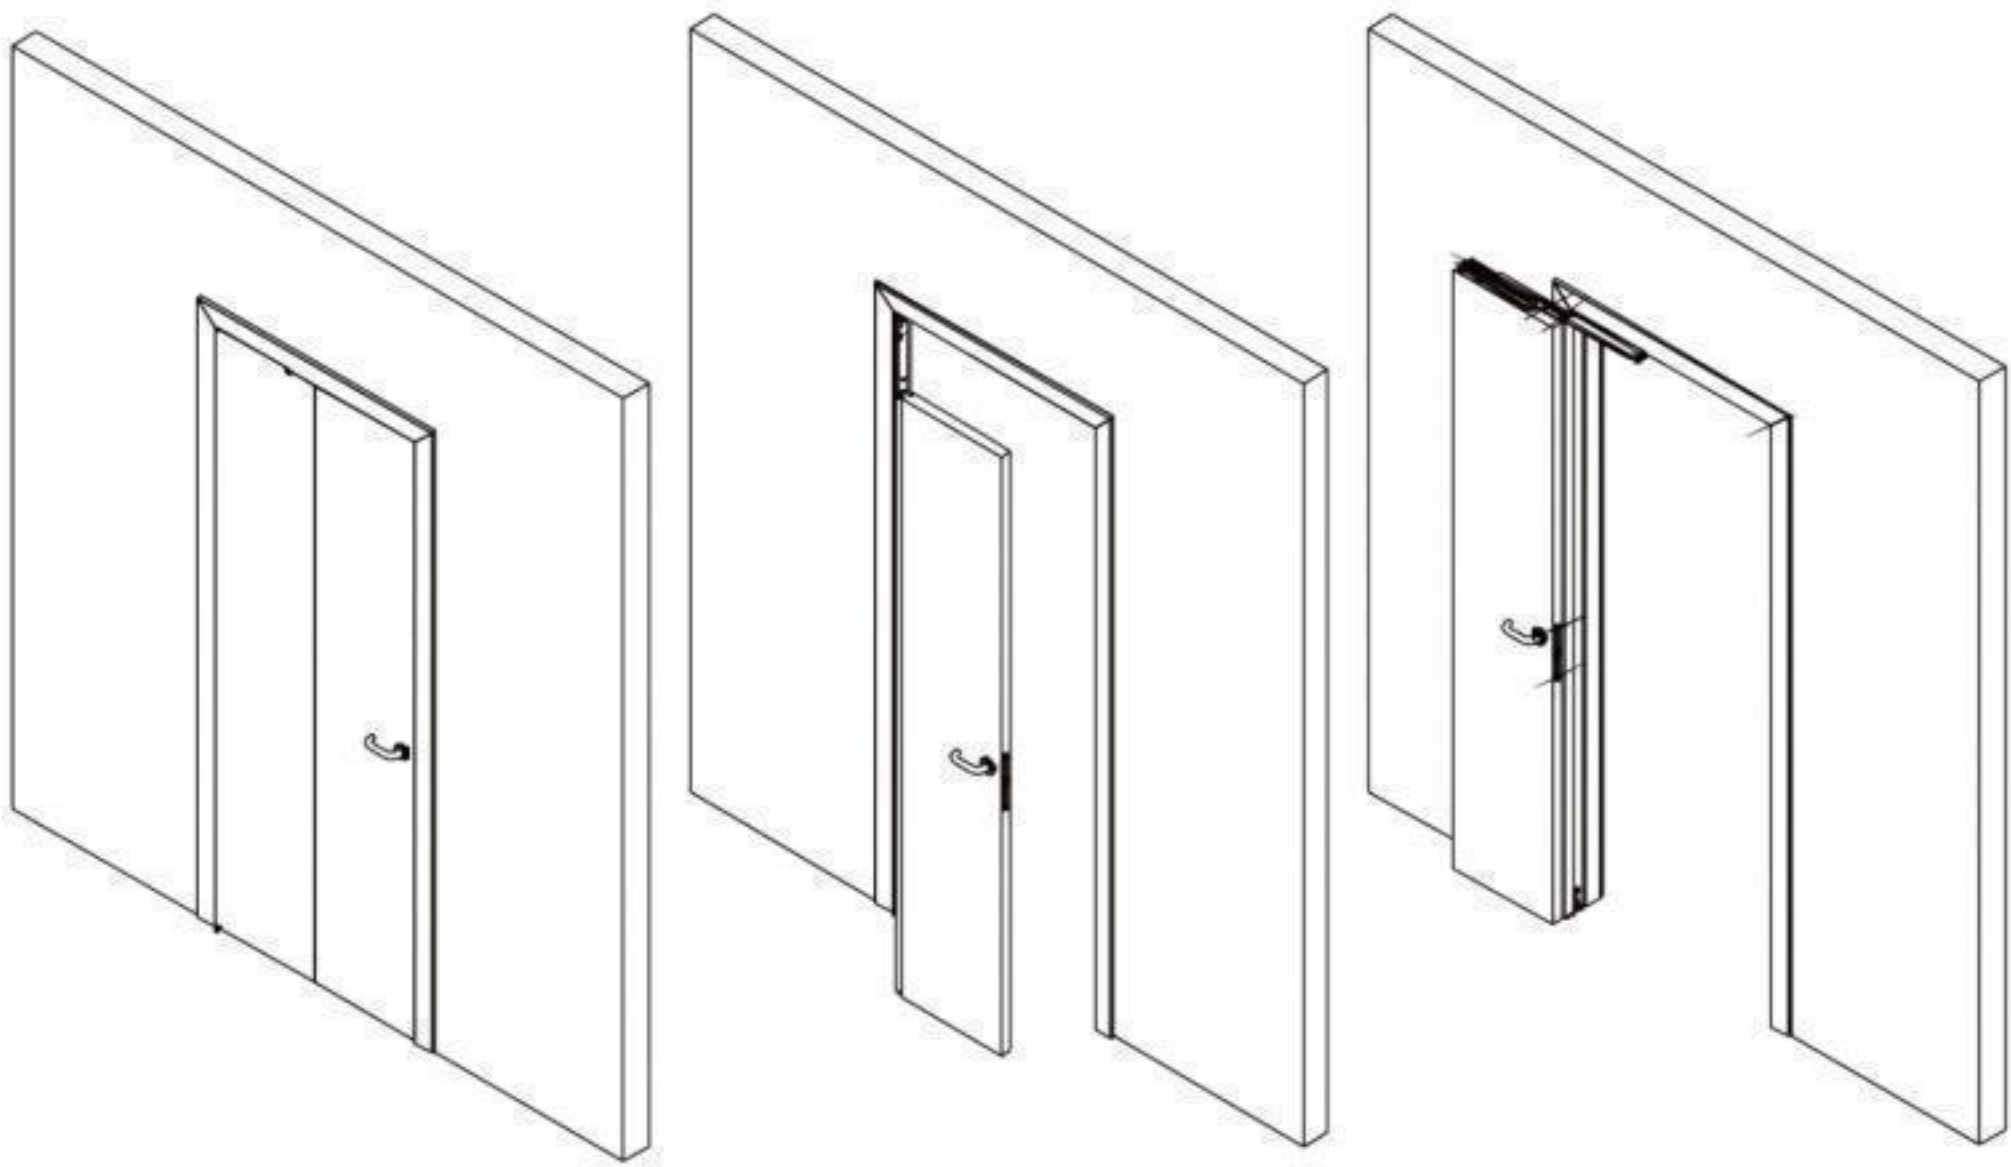

180 ° 折叠门

品名: 180°折门配件
规格: 36-40mm厚门
材料: 304钢材
颜色: 可选
包装: 1套/盒



ZD-180-60R ≥620 墙洞
ZD-180-70R ≥720 墙洞
ZD-180-80R ≥820 墙洞
ZD-180-90R ≥920 墙洞
ZD-180-100R ≥1020 墙洞

Compact living 180° 折叠门配件 (右门)
(1套/盒)




ZD-180-60L ≥620 墙洞
ZD-180-70L ≥720 墙洞
ZD-180-80L ≥820 墙洞
ZD-180-90L ≥920 墙洞
ZD-180-100L ≥1020 墙洞

Compact living 180° 折叠门配件 (左门)
(1套/盒)




Dimensional diagram of the door-symmetric leaves (对等门尺寸图)

模式一-对等门 (两门同等大小)						
LFM 墙洞宽	L hinge door 合页边门	L handle door 把手边门	Z 折门移动空间	V 超越门框空间	Art COMPACK/型号	
					左折门	右折门
620	306.5	306.5	355	250	ZD-180-60L	ZD-180-60R
720	356.5	356.5	405	300	ZD-180-70L	ZD-180-70R
820	406.5	406.5	455	350	ZD-180-80L	ZD-180-80R
920	456.5	456.5	505	400	ZD-180-90L	ZD-180-90R
1020	506.5	506.5	555	450	ZD-180-100L	ZD-180-100R

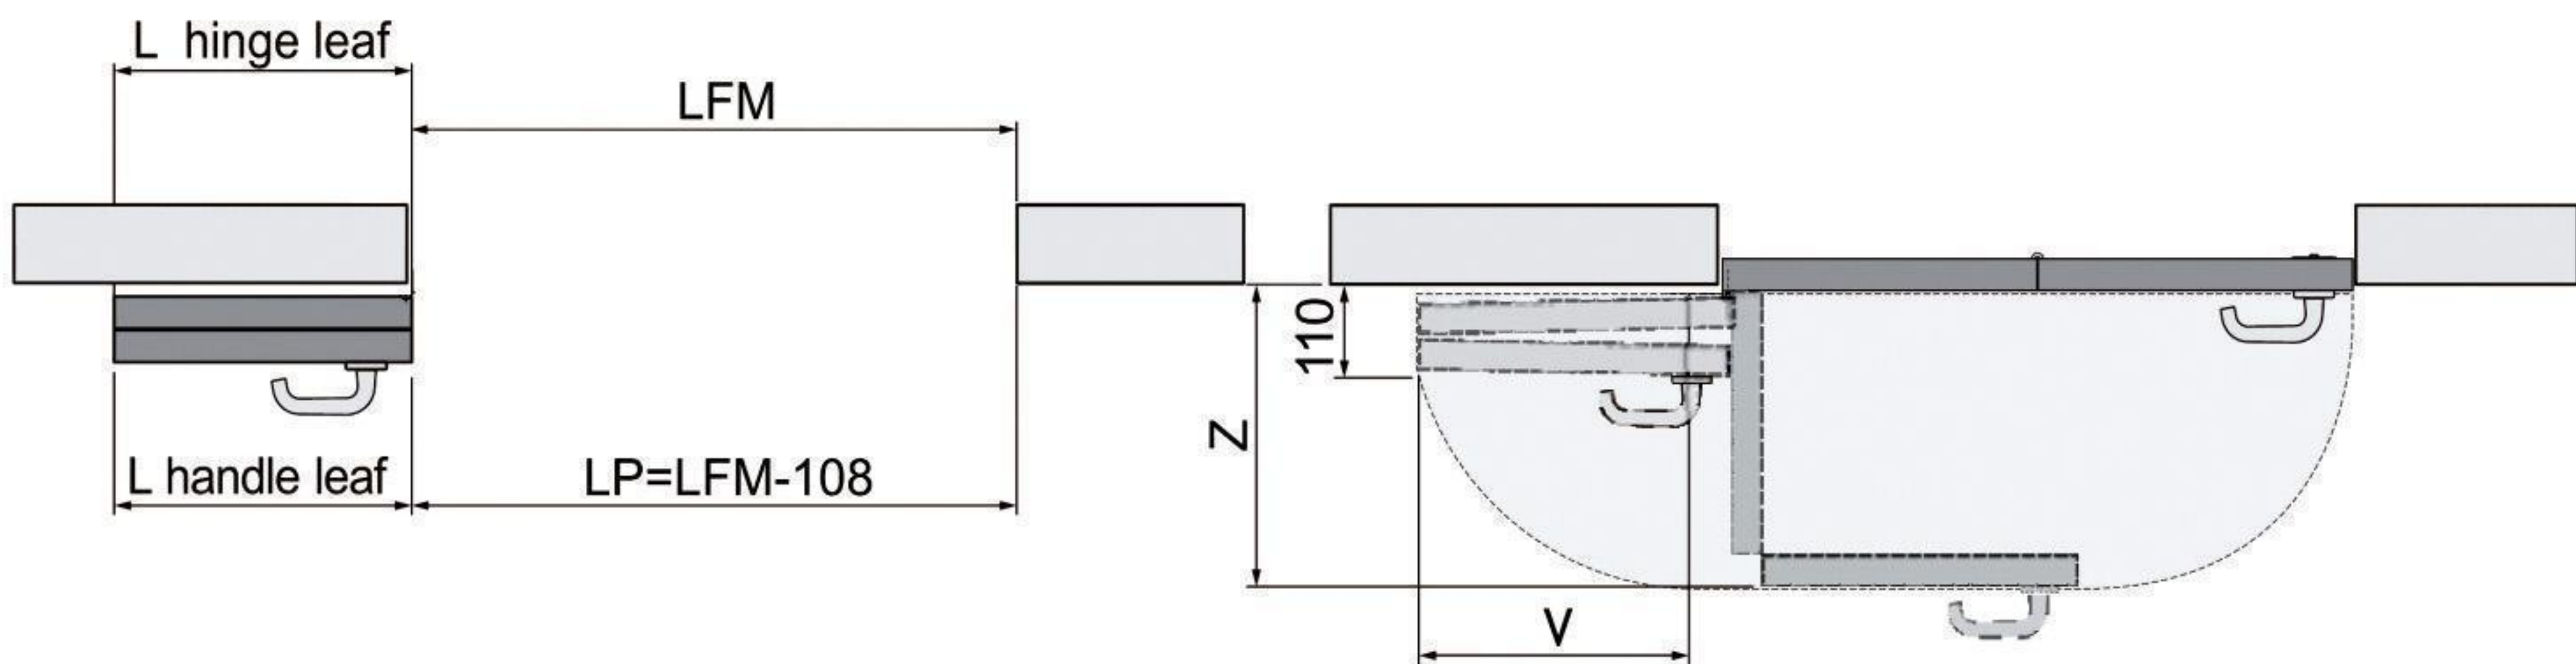


Dimensional diagram of the door-asymmetric leaves (不对等门尺寸图)

模式二-不对等门 (合页边门 > 把手边门) -50~0mm						
LFM 墙洞宽	L hinge door 合页边门	L handle door 把手边门	Z 折门移动空间	V 超越门框空间	Art COMPACK/型号	
					左折门	右折门
598-620	306.5	284.5~306.5	355	250	ZD-180-60L	ZD-180-60R
648-720	356.5	284.5~356.5	405	300	ZD-180-70L	ZD-180-70R
770-820	406.5	356.5~406.5	455	350	ZD-180-80L	ZD-180-80R
870-920	456.5	406.5~456.5	505	400	ZD-180-90L	ZD-180-90R
970-1020	506.5	456.5~506.5	555	450	ZD-180-100L	ZD-180-100R

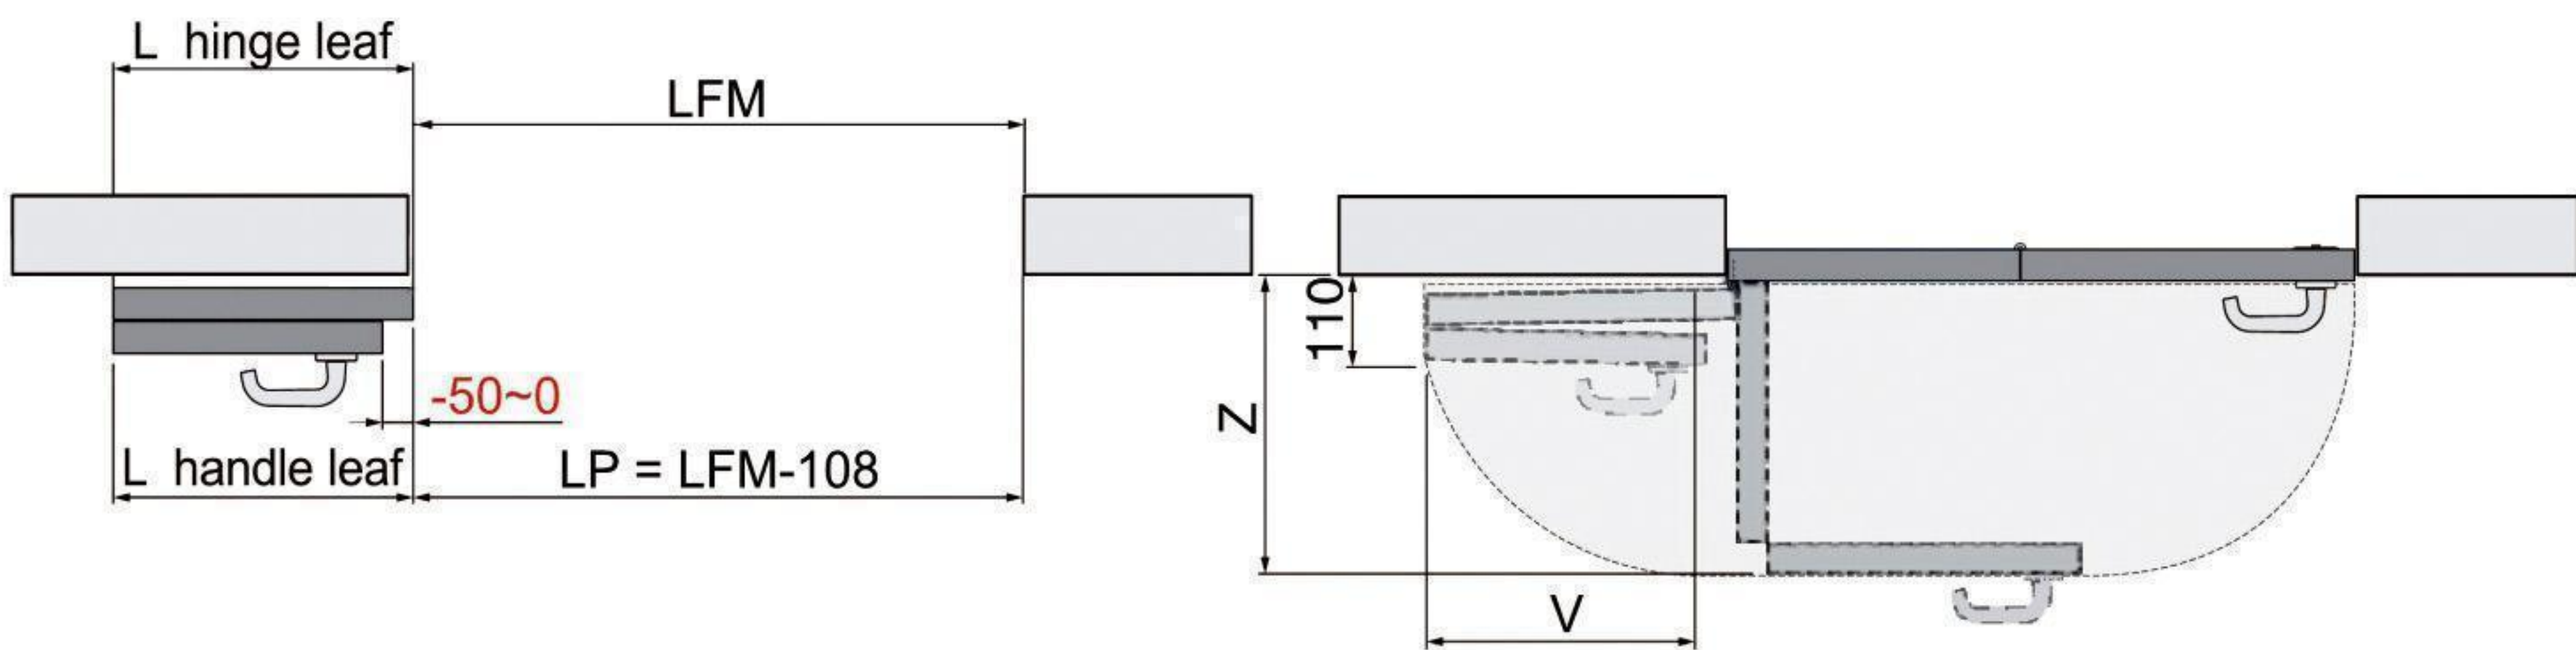

Dimensional diagram of the door-asymmetric leaves (不对等门尺寸图)

模式三-不对等门 (合页边门 < 把手边门) max 100mm						
LFM 墙洞宽	L hinge door 合页边门	L handle door 把手边门	Z 折门移动空间	V 超越门框空间	Art COMPACK/型号	
					左折门	右折门
620-720	306.5	306.5~456.5	355	250	ZD-180-60L	ZD-180-60R
720-820	356.5	356.5~506.5	405	300	ZD-180-70L	ZD-180-70R
820-920	406.5	406.5~556.5	455	350	ZD-180-80L	ZD-180-80R
920-1020	456.5	456.5~606.5	505	400	ZD-180-90L	ZD-180-90R
1020-1220	506.5	506.5~706.5	555	450	ZD-180-100L	ZD-180-100R

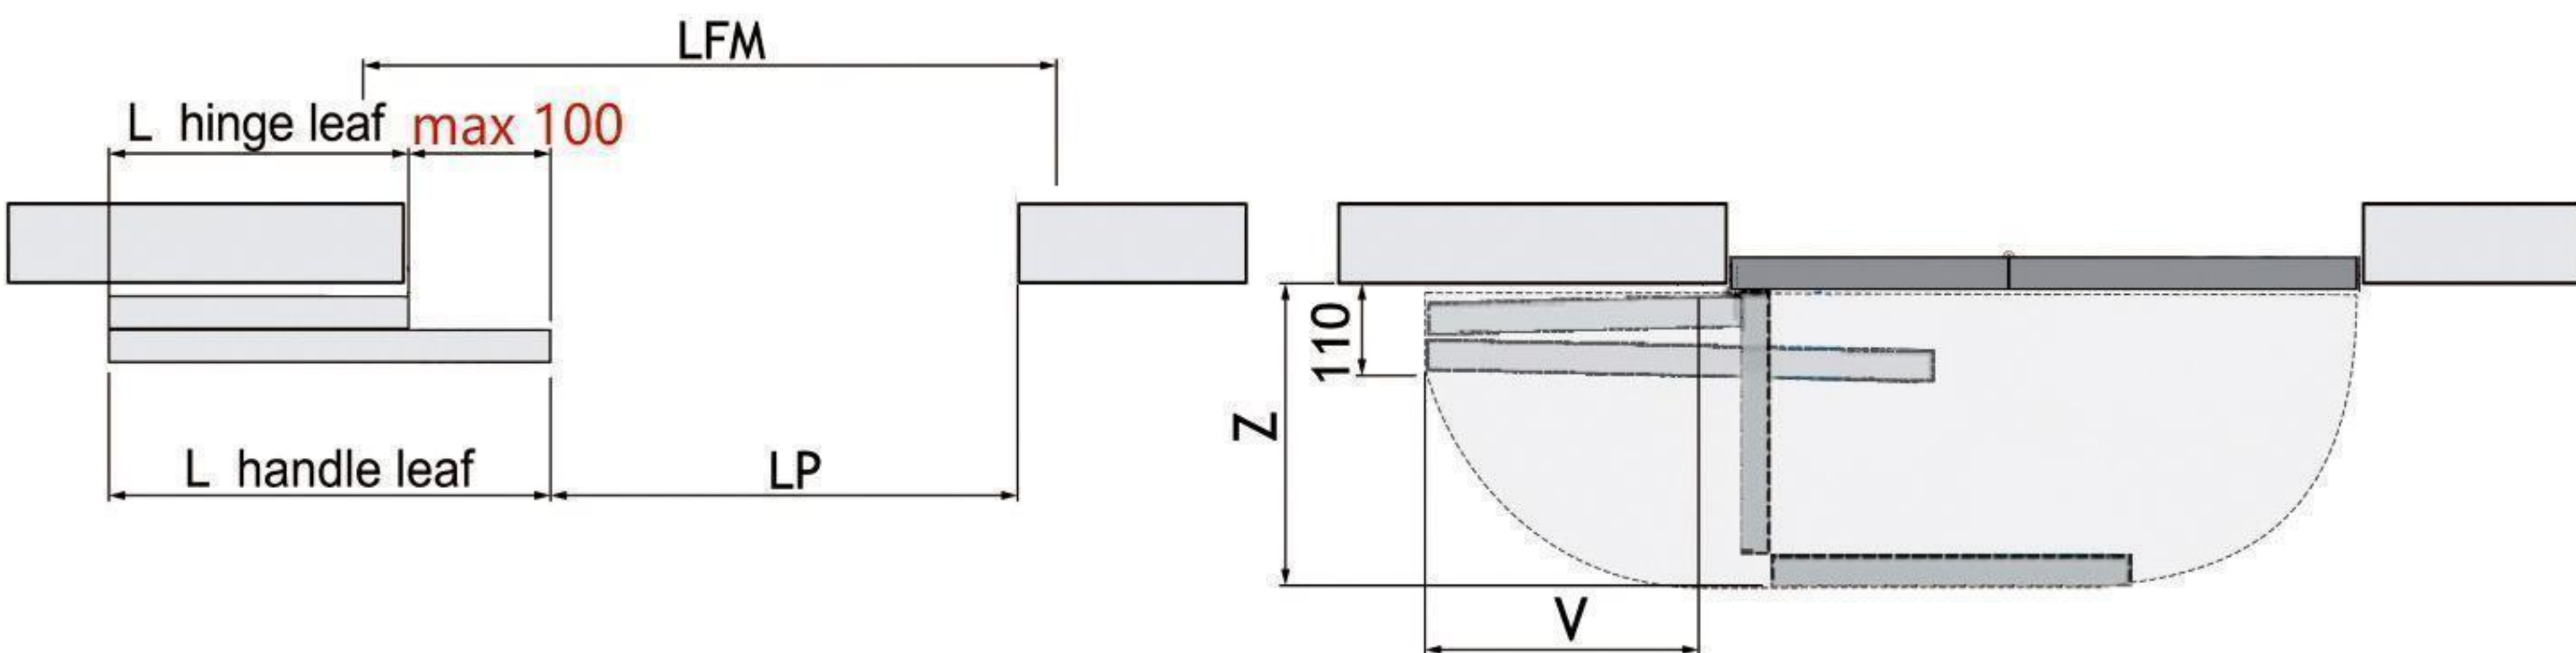

模式二：例
Mode 2: Example


LFM(墙洞宽度)=775mm
775-7=768
768÷2=384
因合页边门 > 把手边门
选406.5合页扇
768-406.5=361.5 (把手扇)

模式三：例
Mode 3: Example


LFM(墙洞宽度)=775mm
775-356.5=418.5
选70L或70R

此安装模式拉手位置必须安装在把手边门的“Y”距离之内

Vertical section (门框及门高参数图)

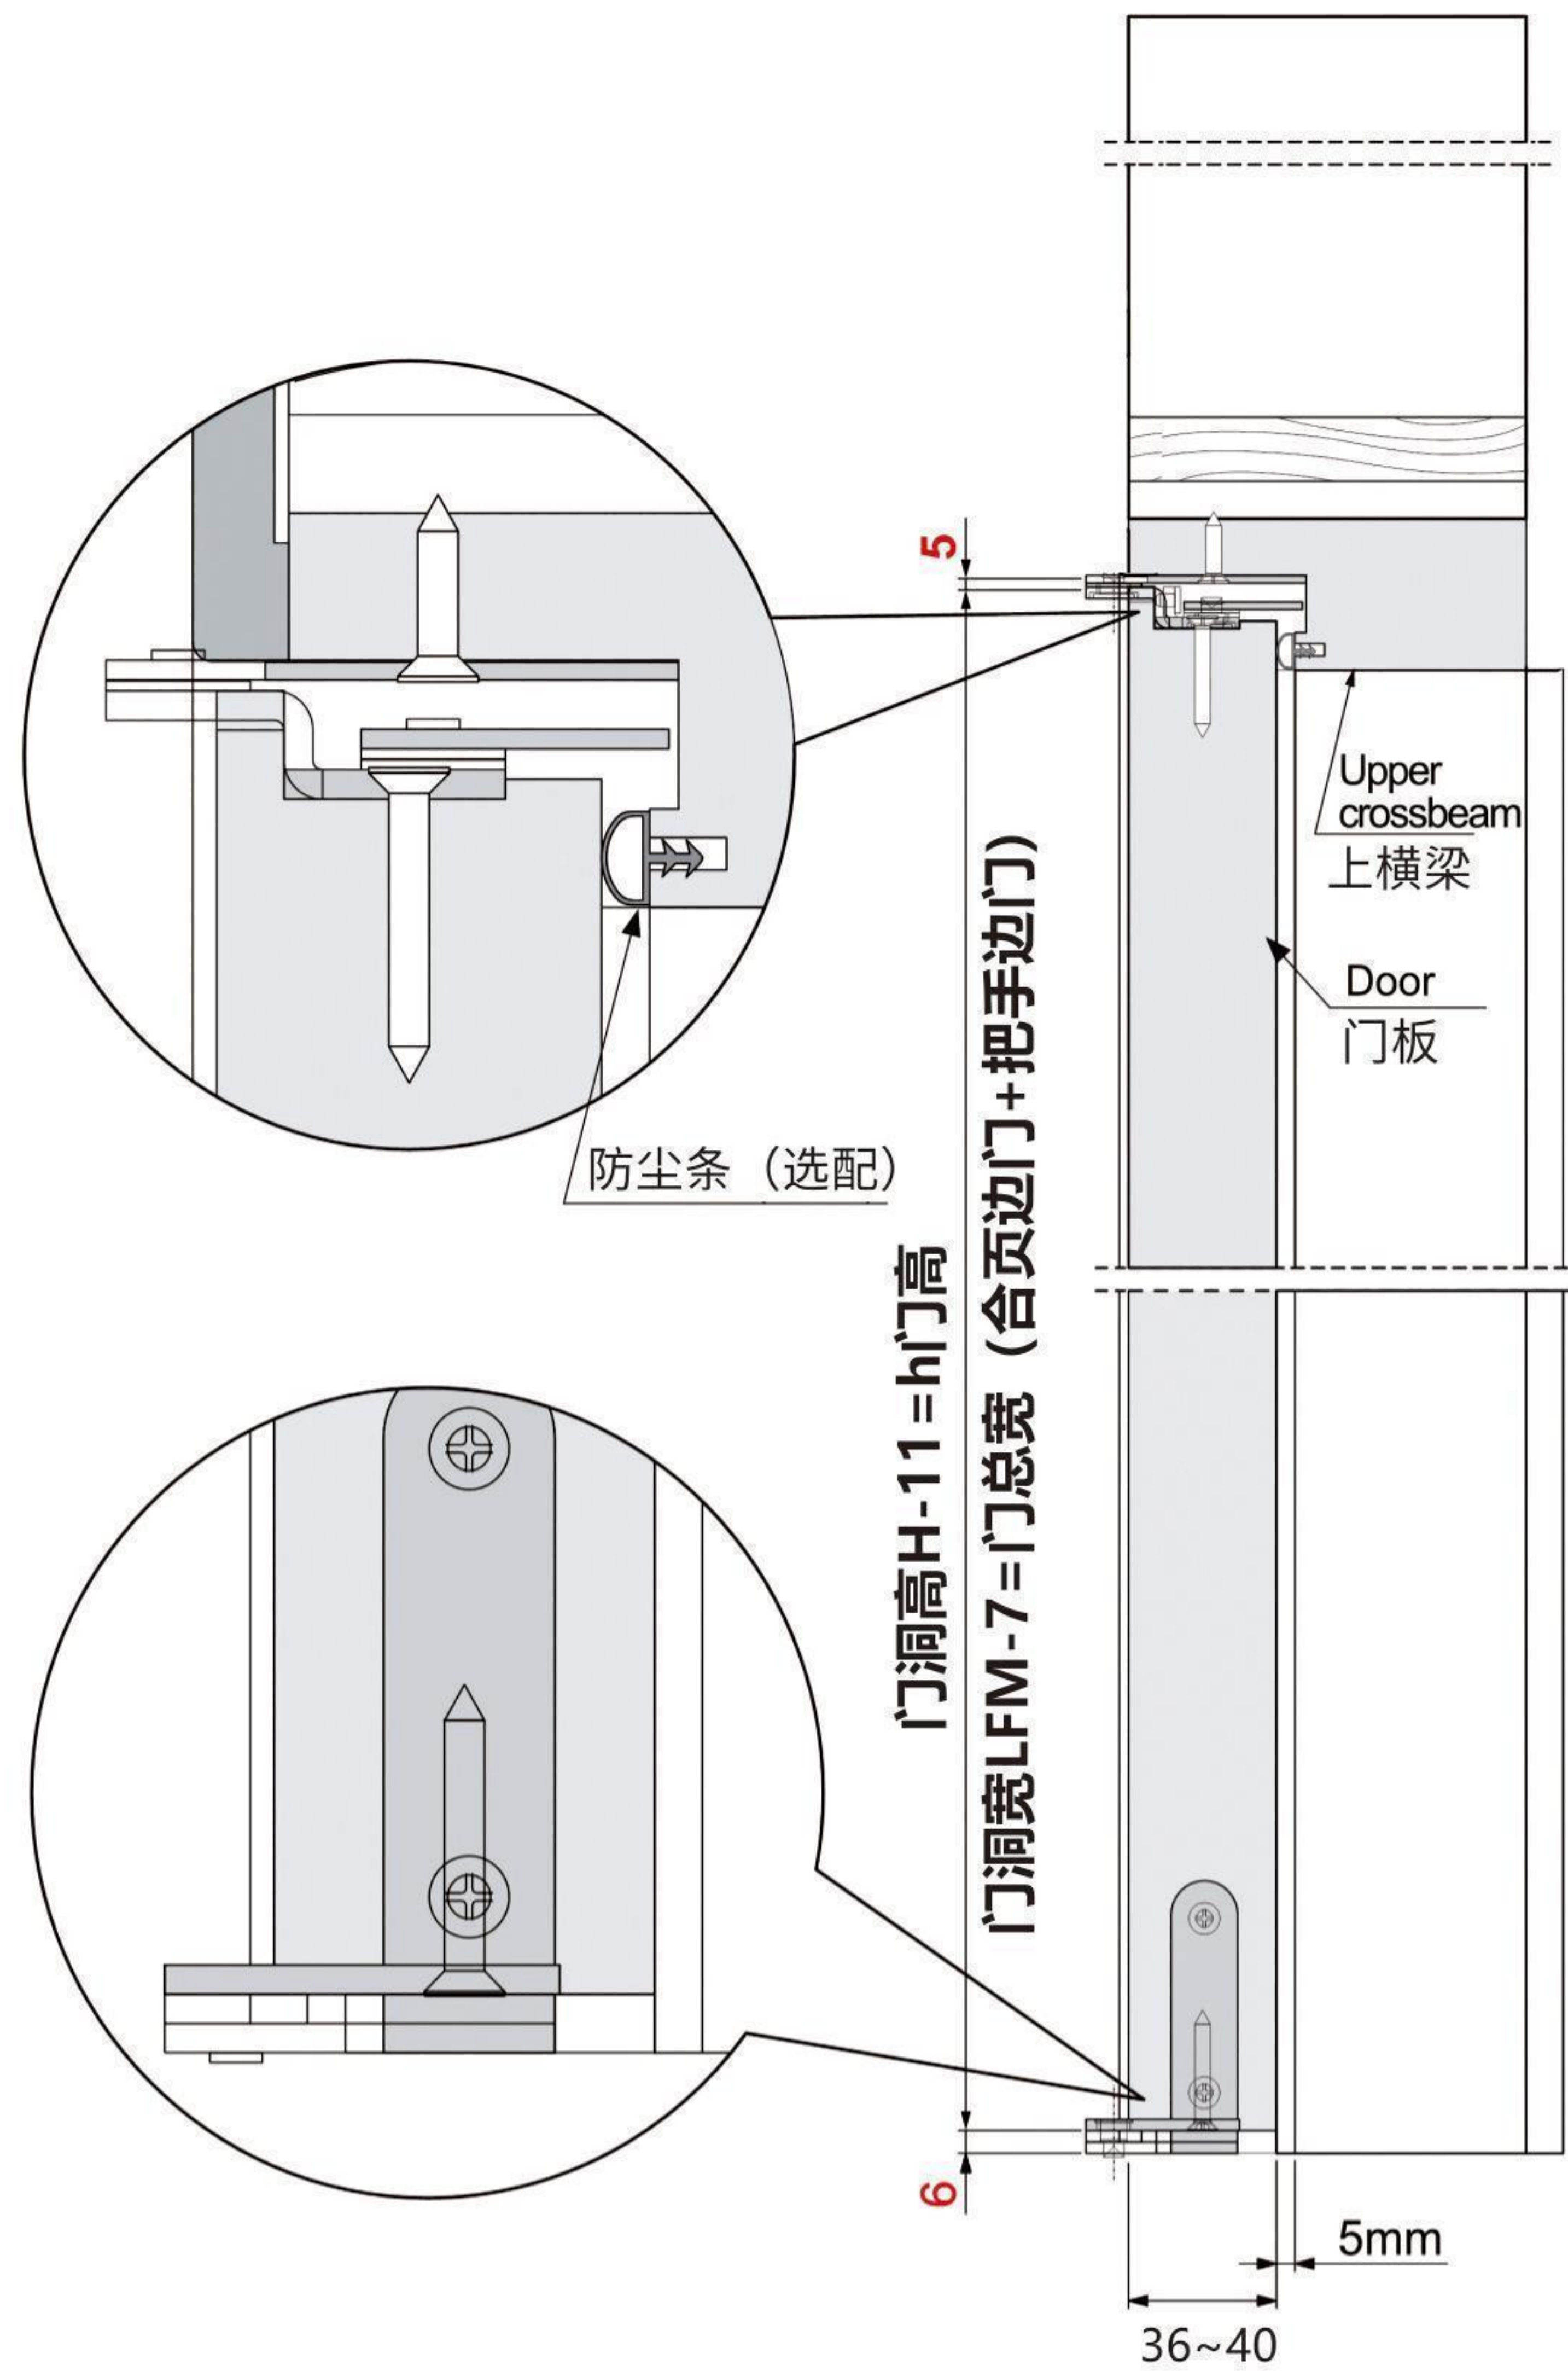


Horizontal section left door (左门框及门宽参数图)

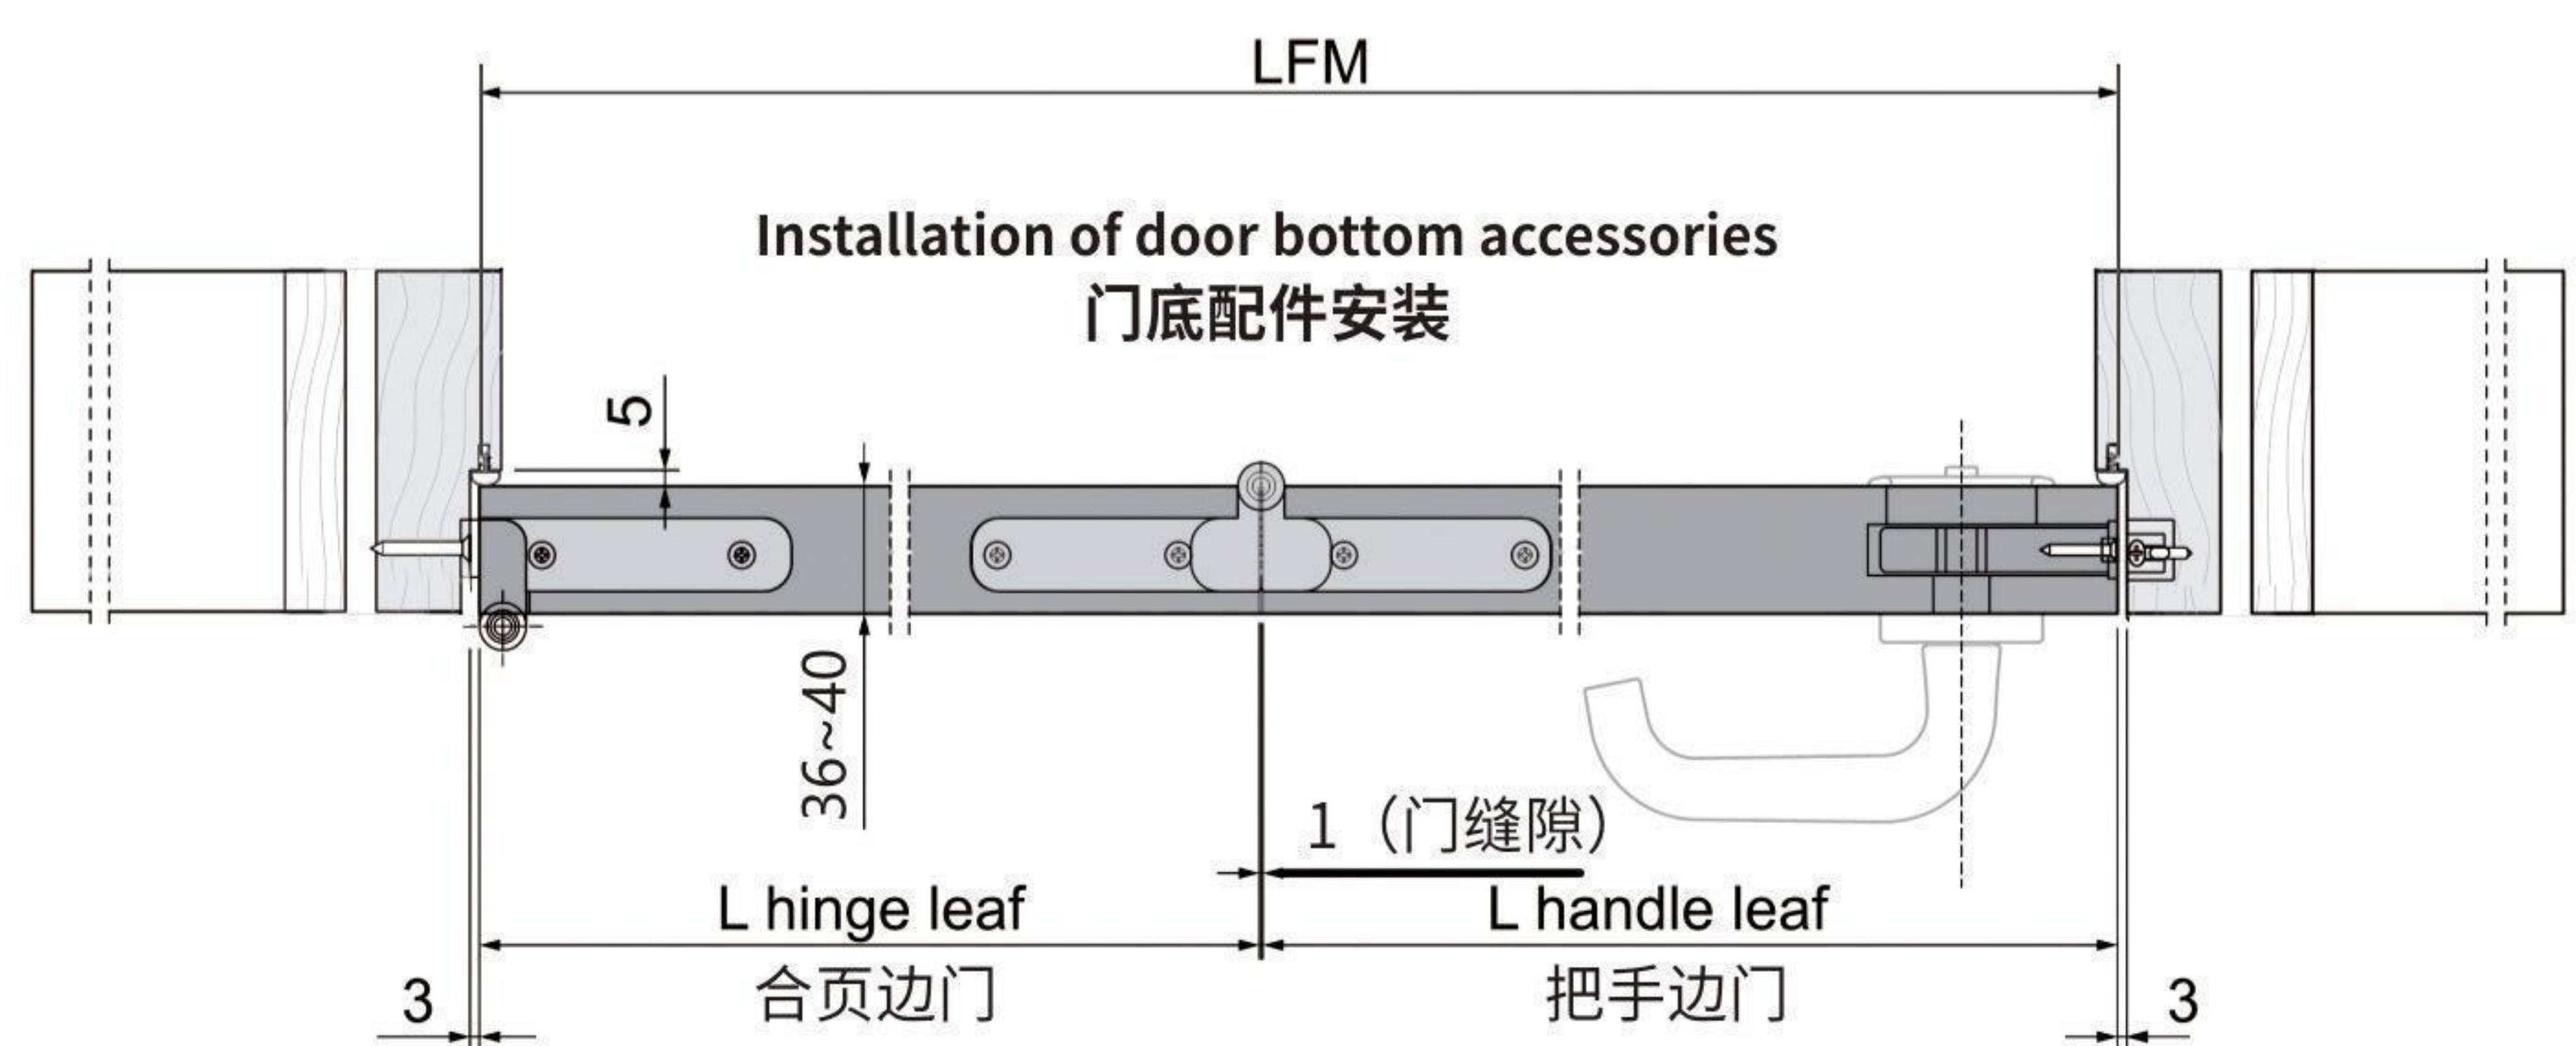


★ 把手边门宽度计算数据

180°双折门系统 180 ° double folding door system


Door frame size (左门上门框尺寸及开孔图) 右门与之相对称

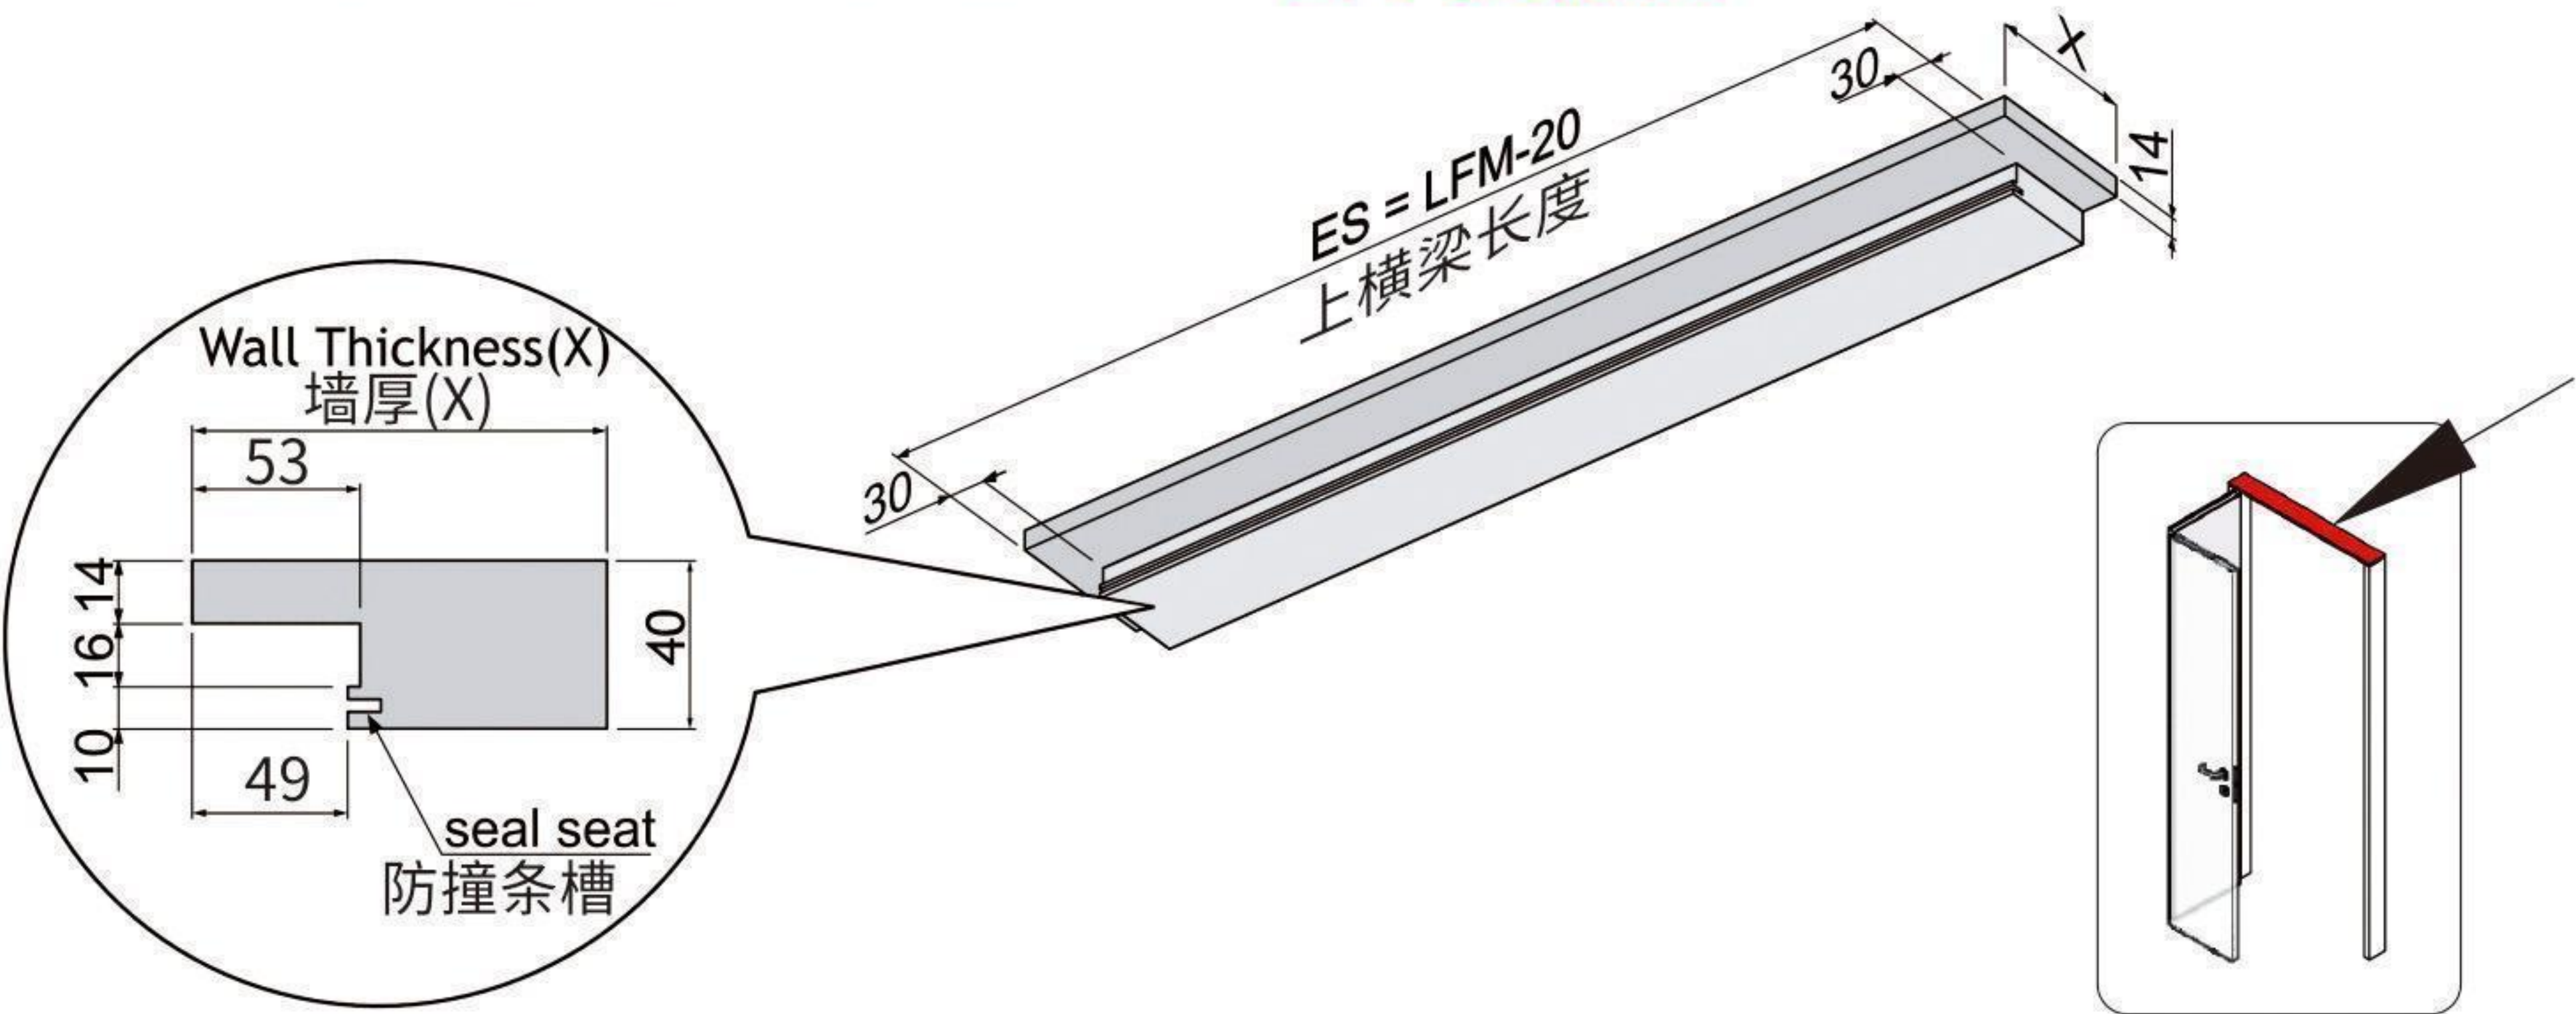

Door left jamb hinge side (左门合页边门框尺寸及开孔图) 右门与之相对称

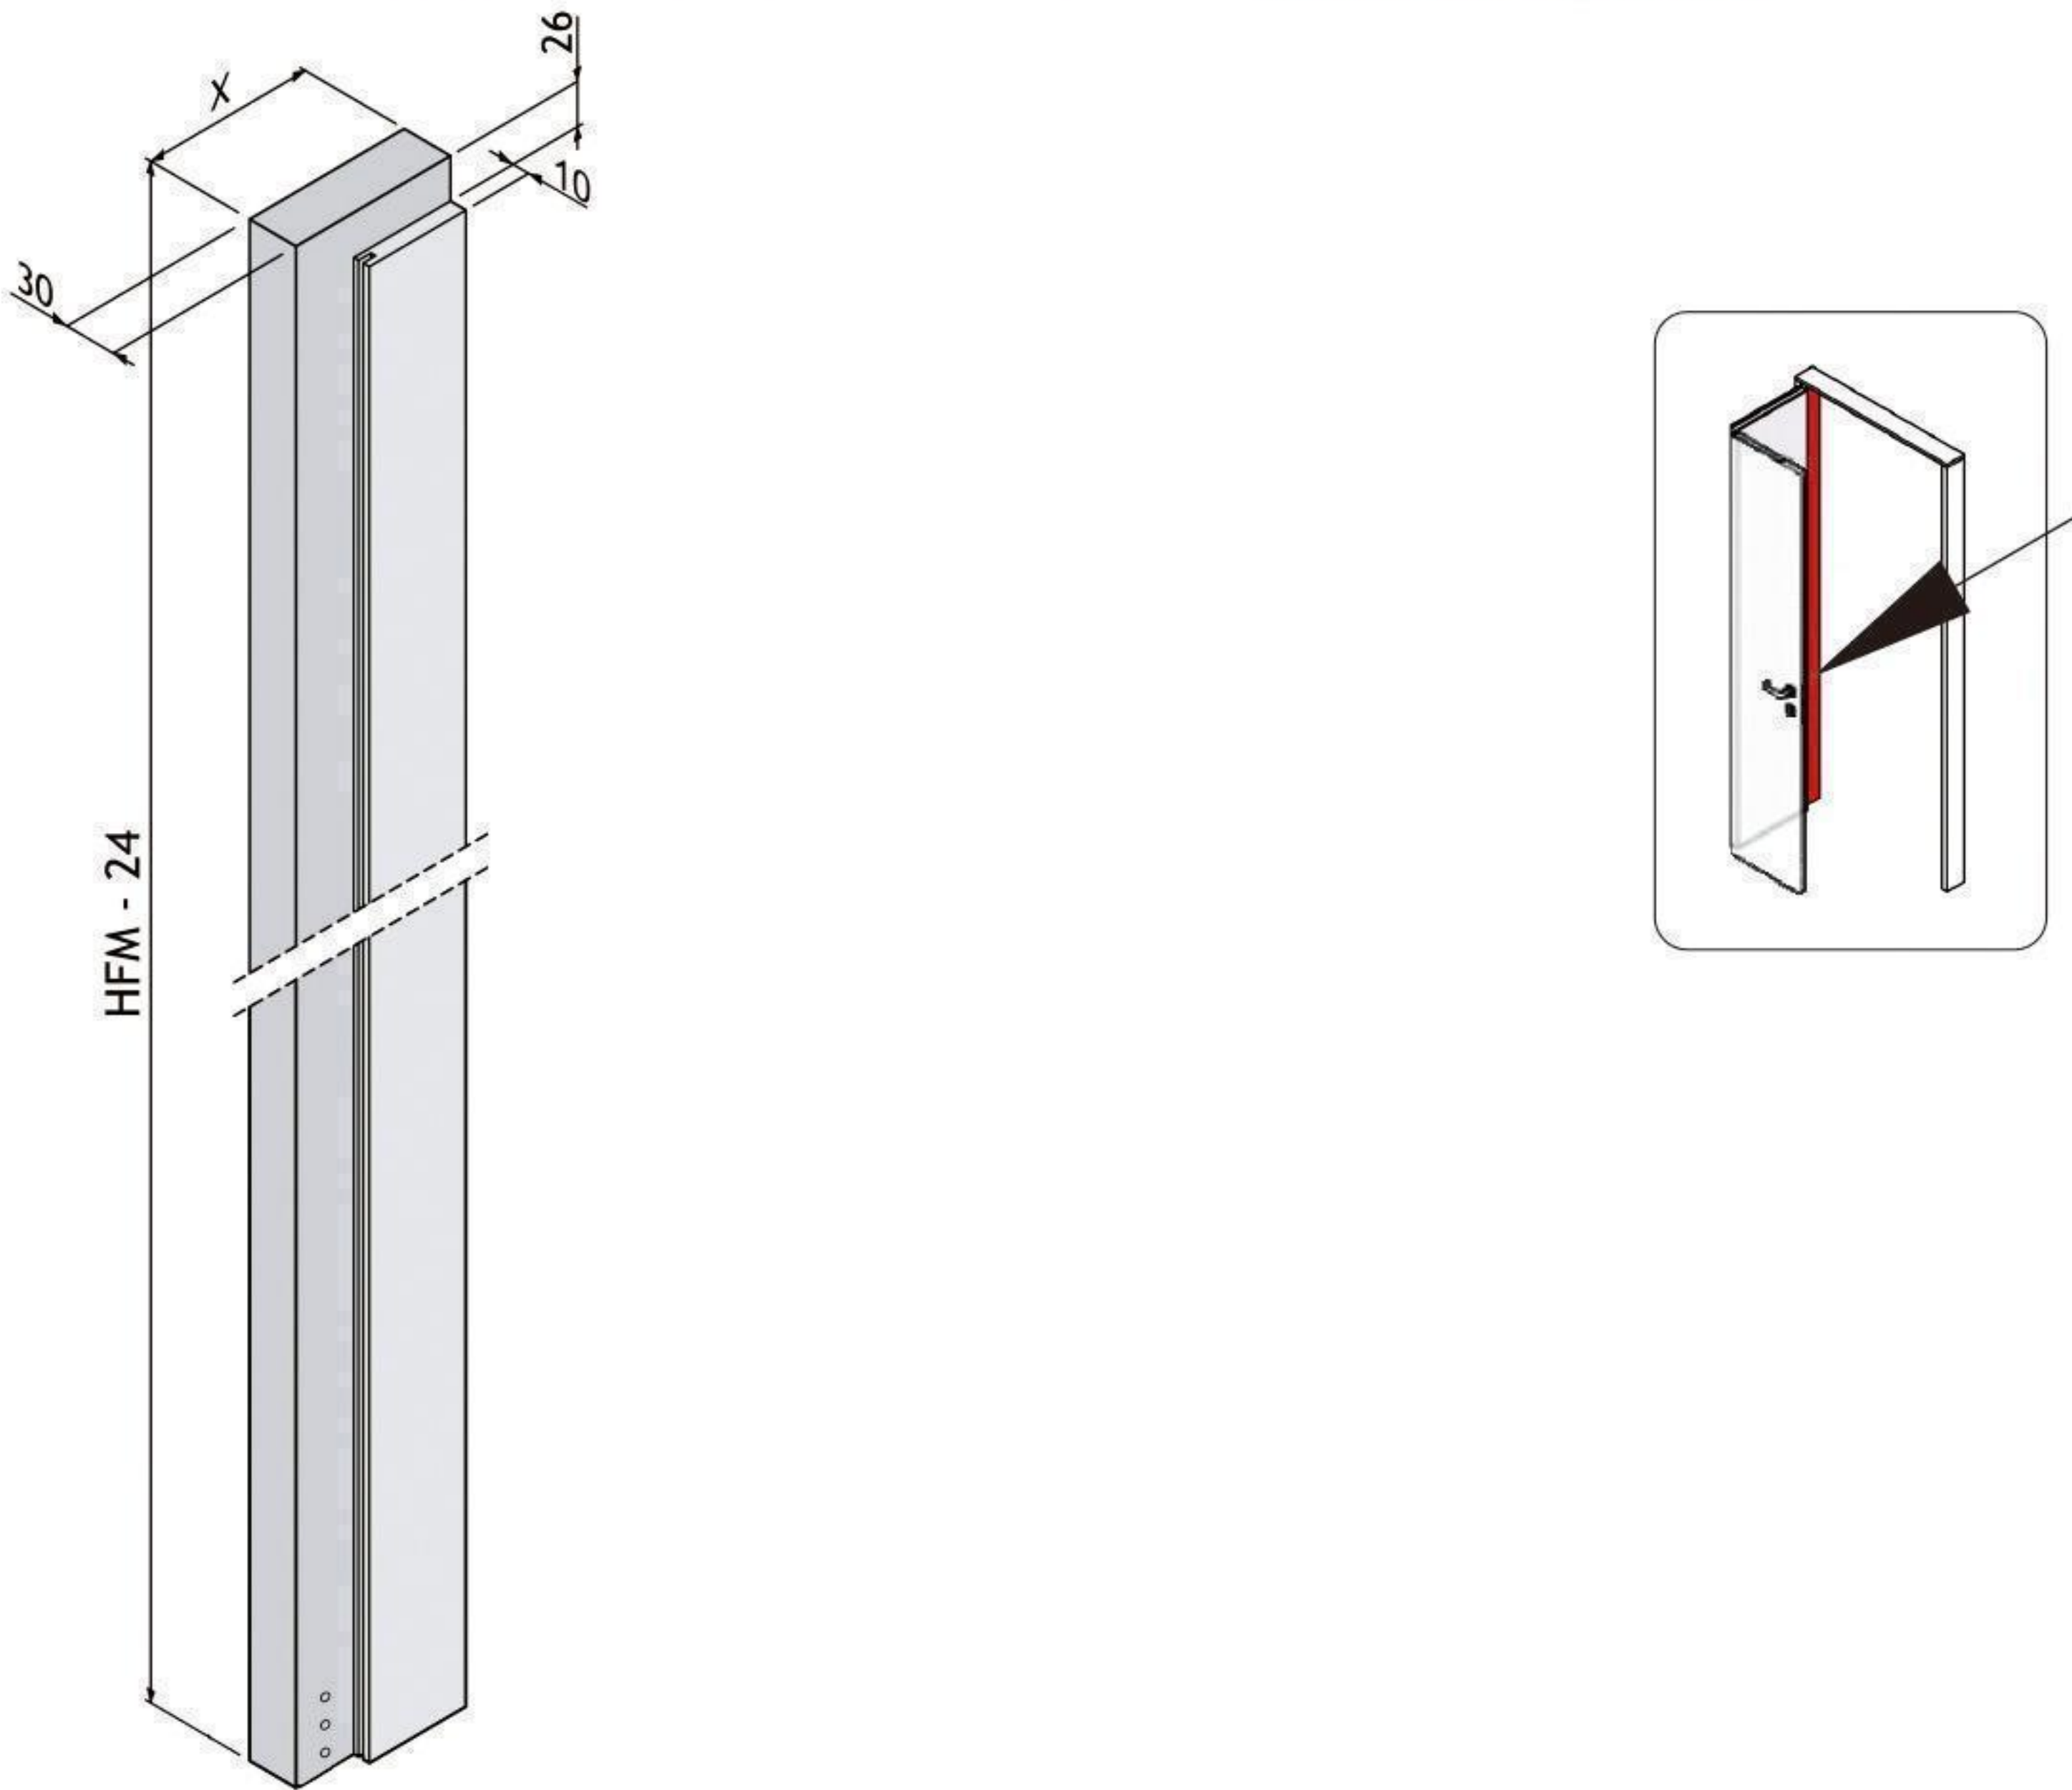

Door left jamb handle side (左门把手边门框尺寸及开孔图) 右门与之相对称

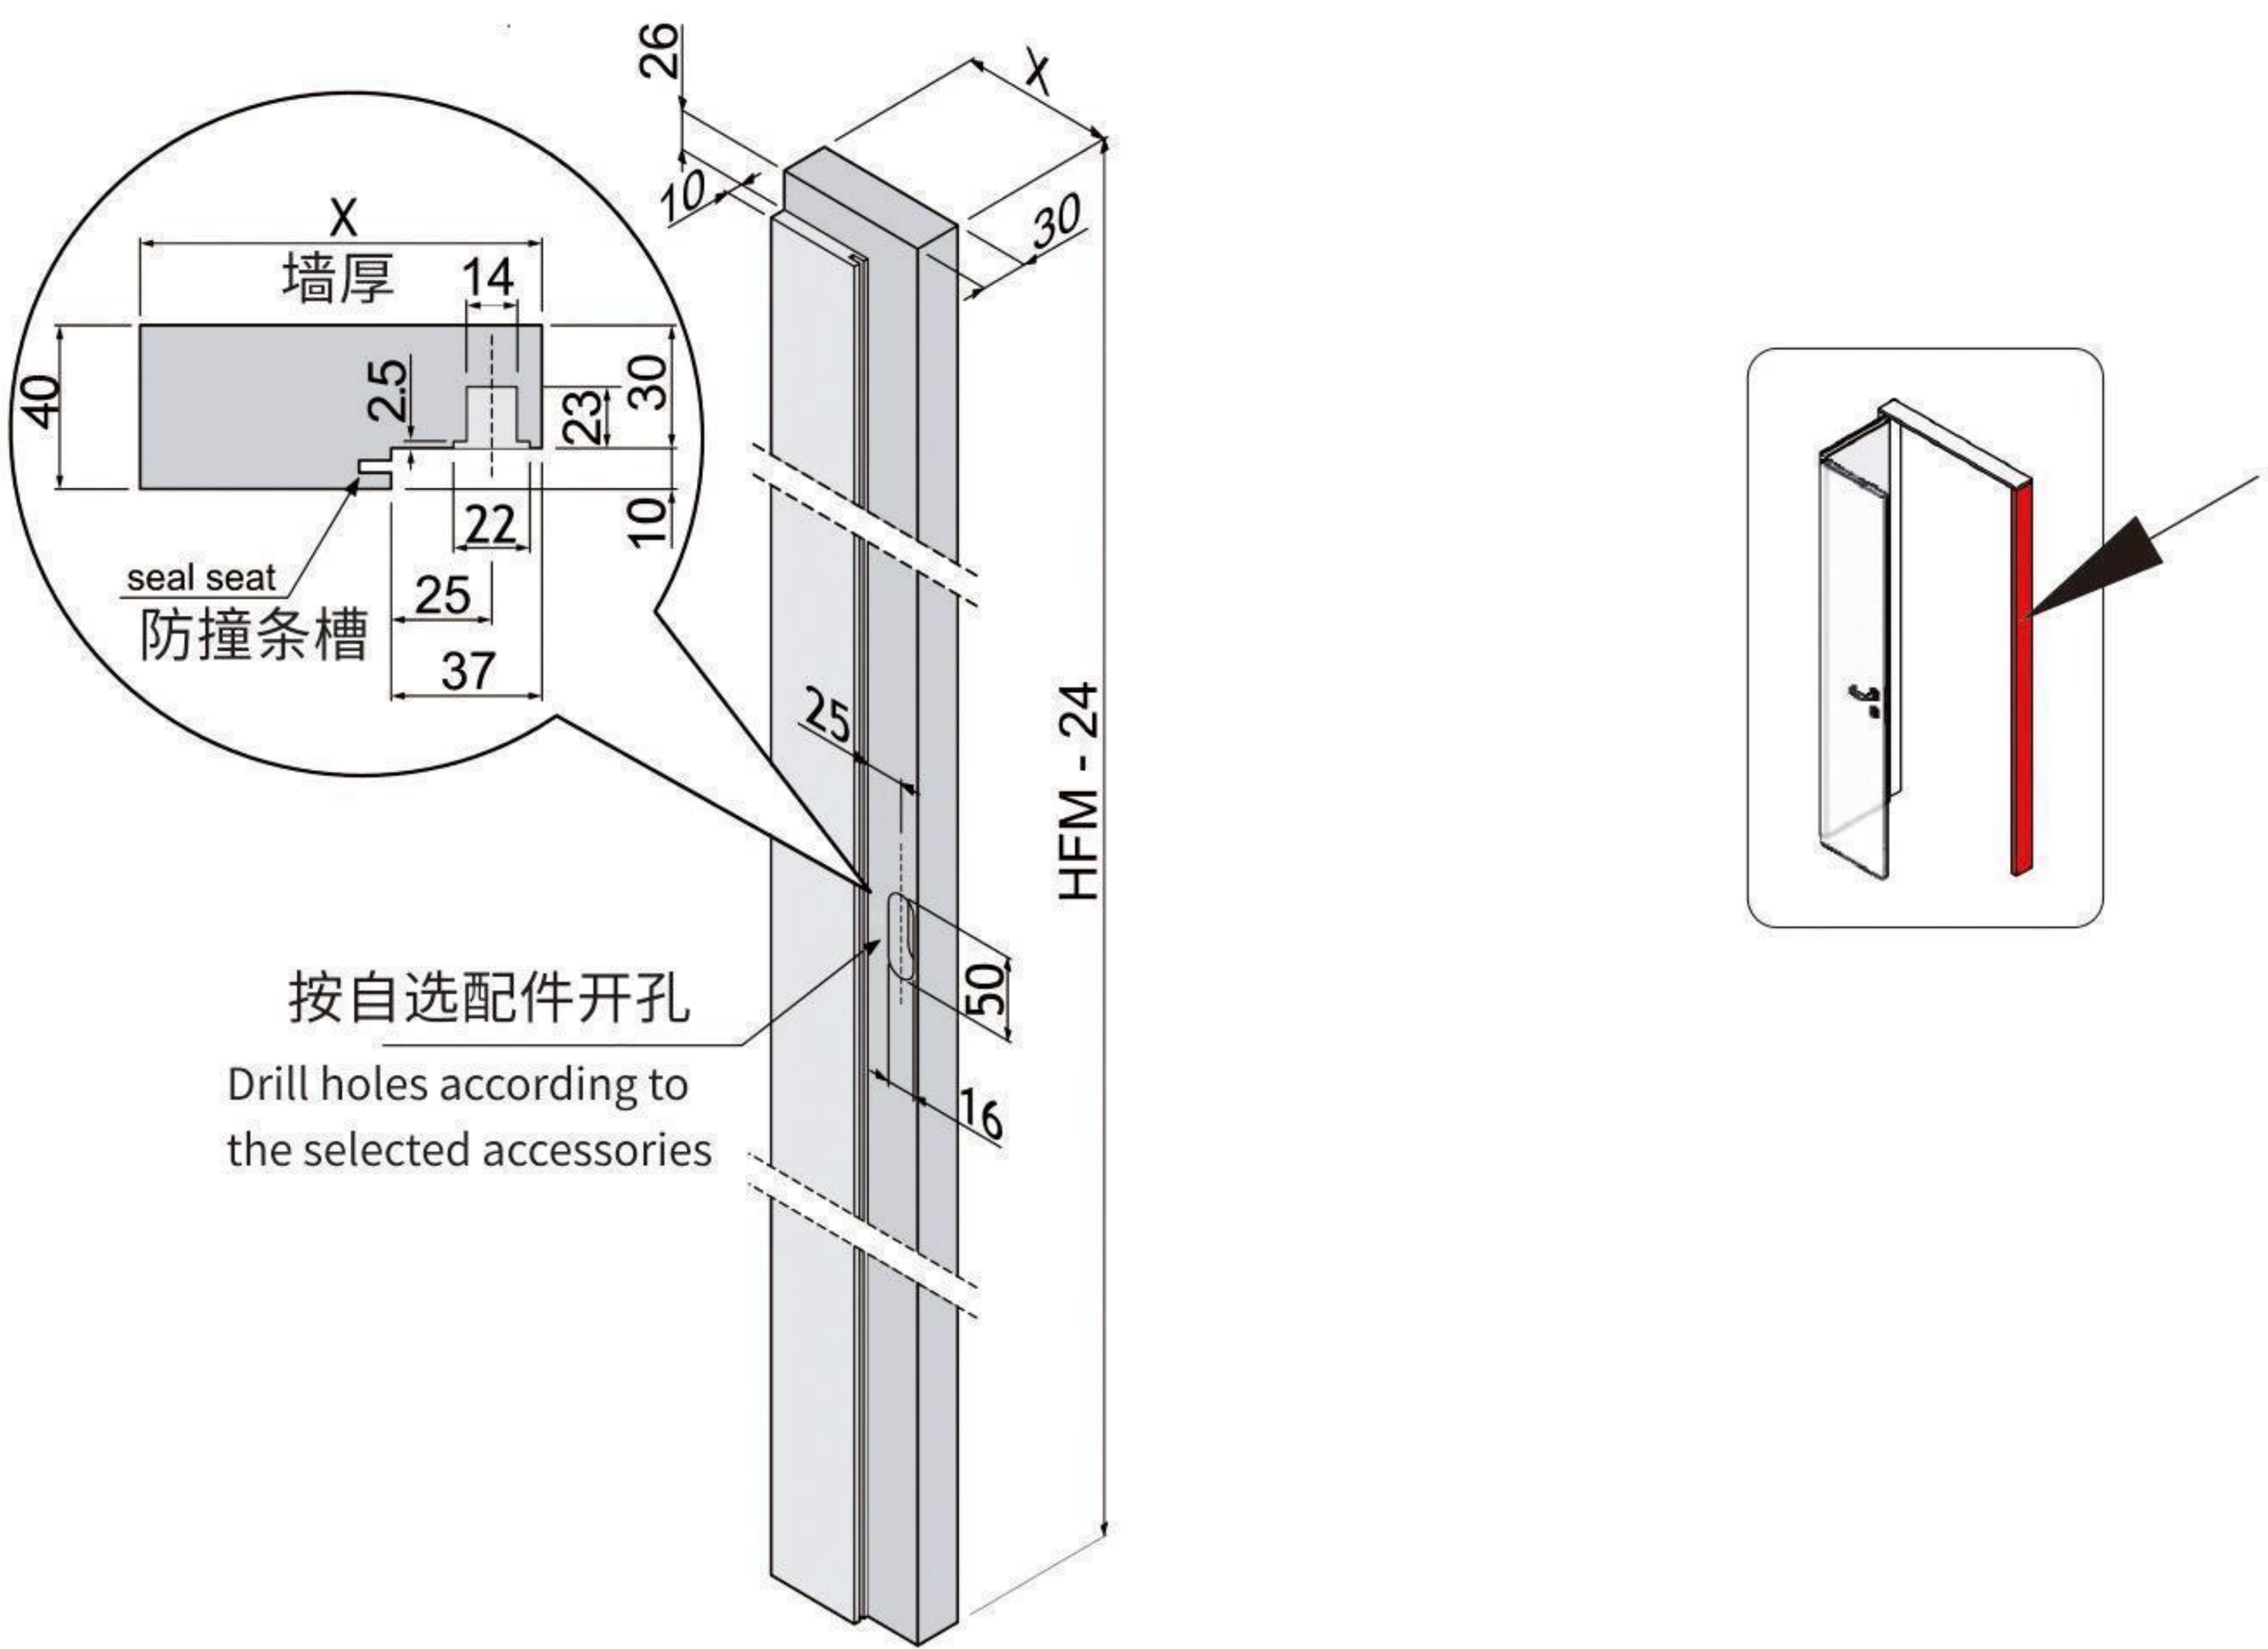


磁力锁口片
(选配)

Upper hardware seat diagram (上配件门板开孔数据图)


模式一 - 对等门 (合页边门=把手边门)					
Art COMPACT/型号		Hinge leaf 合页边门	X	Handle leaf 把手边门	Y
左折门	右折门				
ZD-180-60L	ZD-180-60R	306.5	280	306.5	303
ZD-180-70L	ZD-180-70R	356.5	280	356.5	303
ZD-180-80L	ZD-180-80R	406.5	330	406.5	353
ZD-180-90L	ZD-180-90R	456.5	380	456.5	403
ZD-180-100L	ZD-180-100R	506.5	430	506.5	453

模式二 - 不对等门 (合页边门 > 把手边门)					
Art COMPACT/型号		Hinge leaf 合页边门	X	Handle leaf 把手边门	Y
左折门	右折门				
ZD-180-60L	ZD-180-60R	306.5	280	256.5~306.5	303
ZD-180-70L	ZD-180-70R	356.5	280	306.5~356.5	303
ZD-180-80L	ZD-180-80R	406.5	330	356.5~406.5	353
ZD-180-90L	ZD-180-90R	456.5	380	406.5~456.5	403
ZD-180-100L	ZD-180-100R	506.5	430	456.5~506.5	453

模式三 - 不对等门 (合页边门 < 把手边门)					
Art COMPACT/型号		Hinge leaf 合页边门	X	Handle leaf 把手边门	Y
左折门	右折门				
ZD-180-60L	ZD-180-60R	306.5	280	306.5~506.5	303
ZD-180-70L	ZD-180-70R	356.5	280	356.5~556.5	303
ZD-180-80L	ZD-180-80R	406.5	330	406.5~606.5	353
ZD-180-90L	ZD-180-90R	456.5	380	456.5~656.5	403
ZD-180-100L	ZD-180-100R	506.5	430	506.5~706.5	453

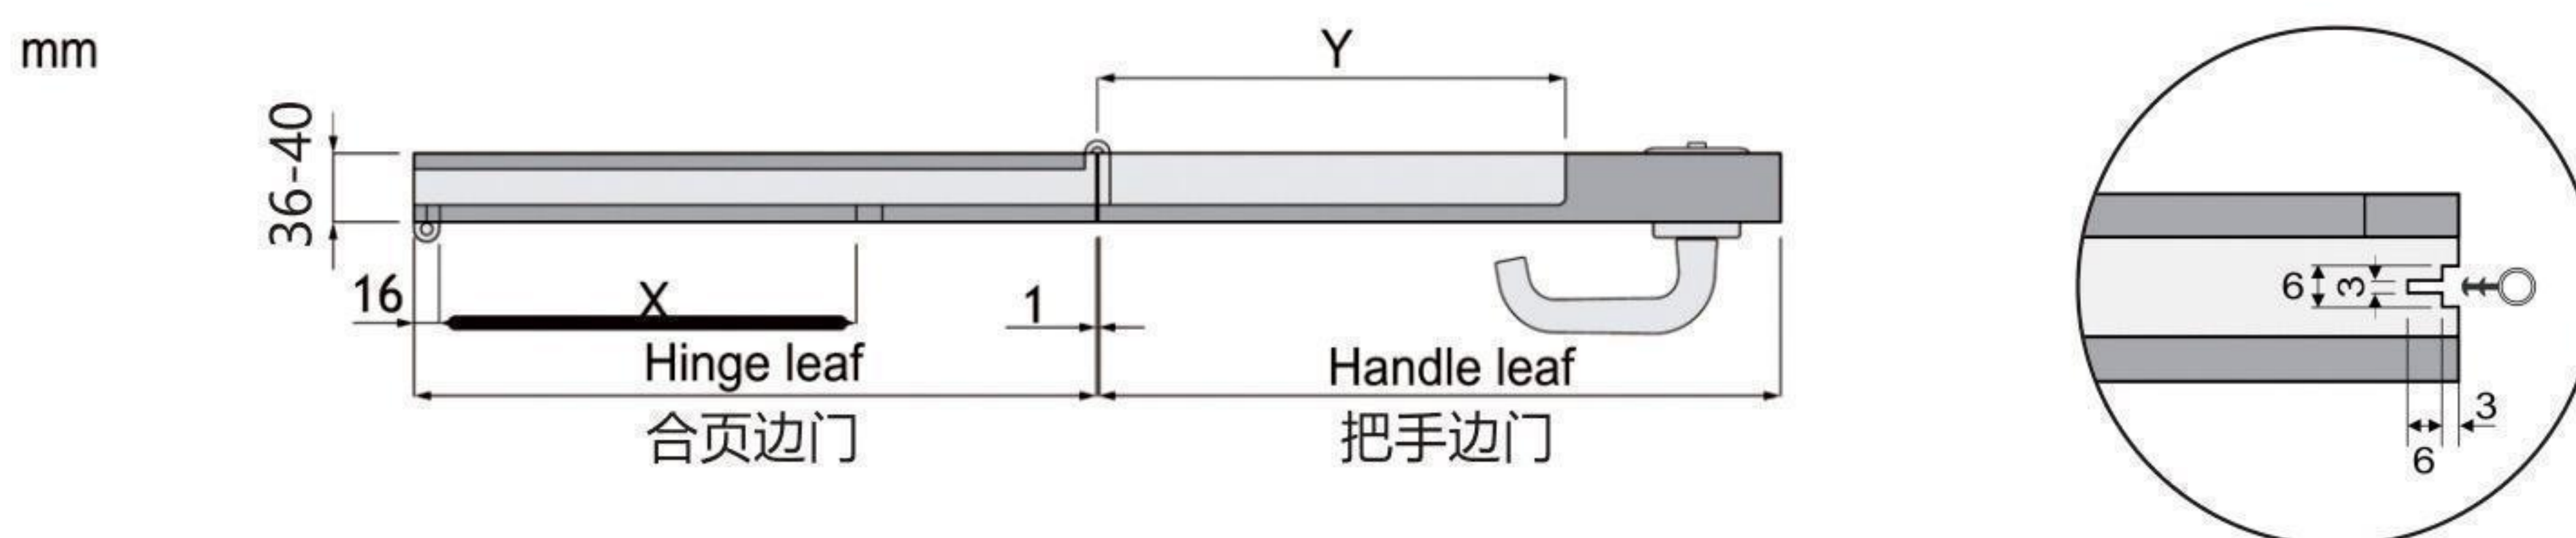


Left leaf door hinge side (左门合页边门开孔数据)**右门与之相对称**

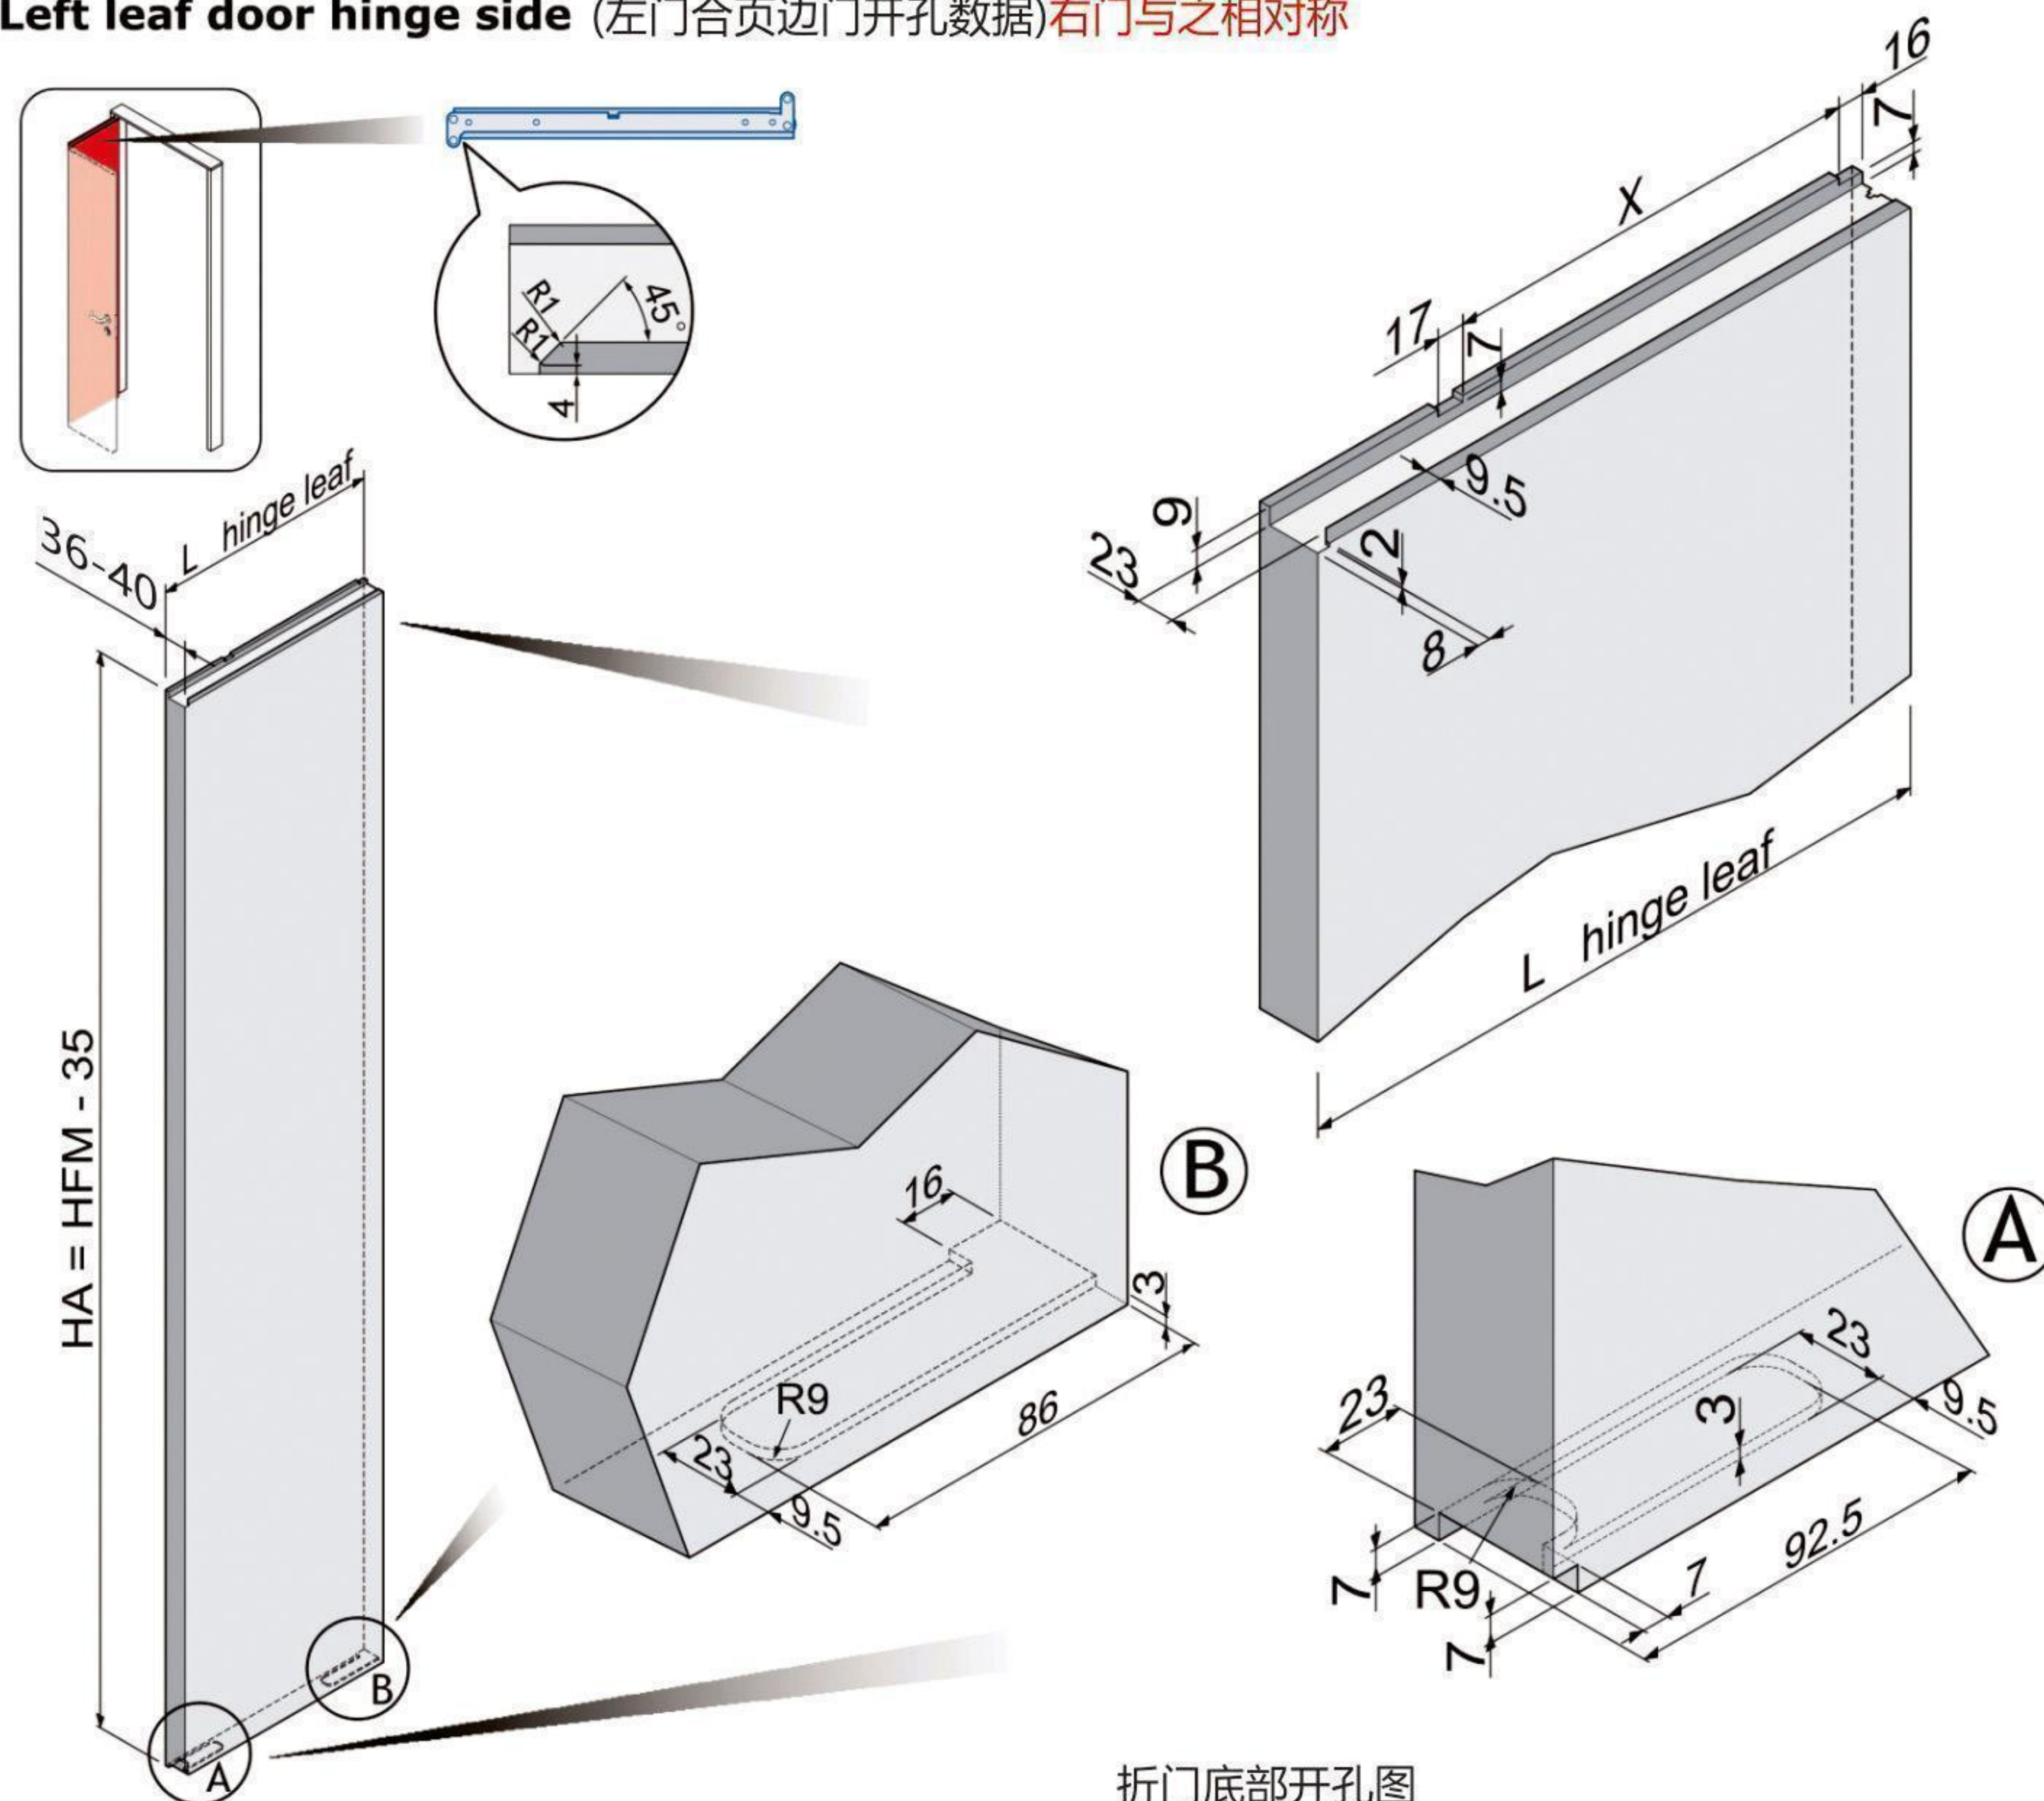


HFM=墙洞高度
HA=门

180°双折门系统 180 ° double folding door system

Left leaf door handle side (左门把手边门开孔数据) 右门与之相对称

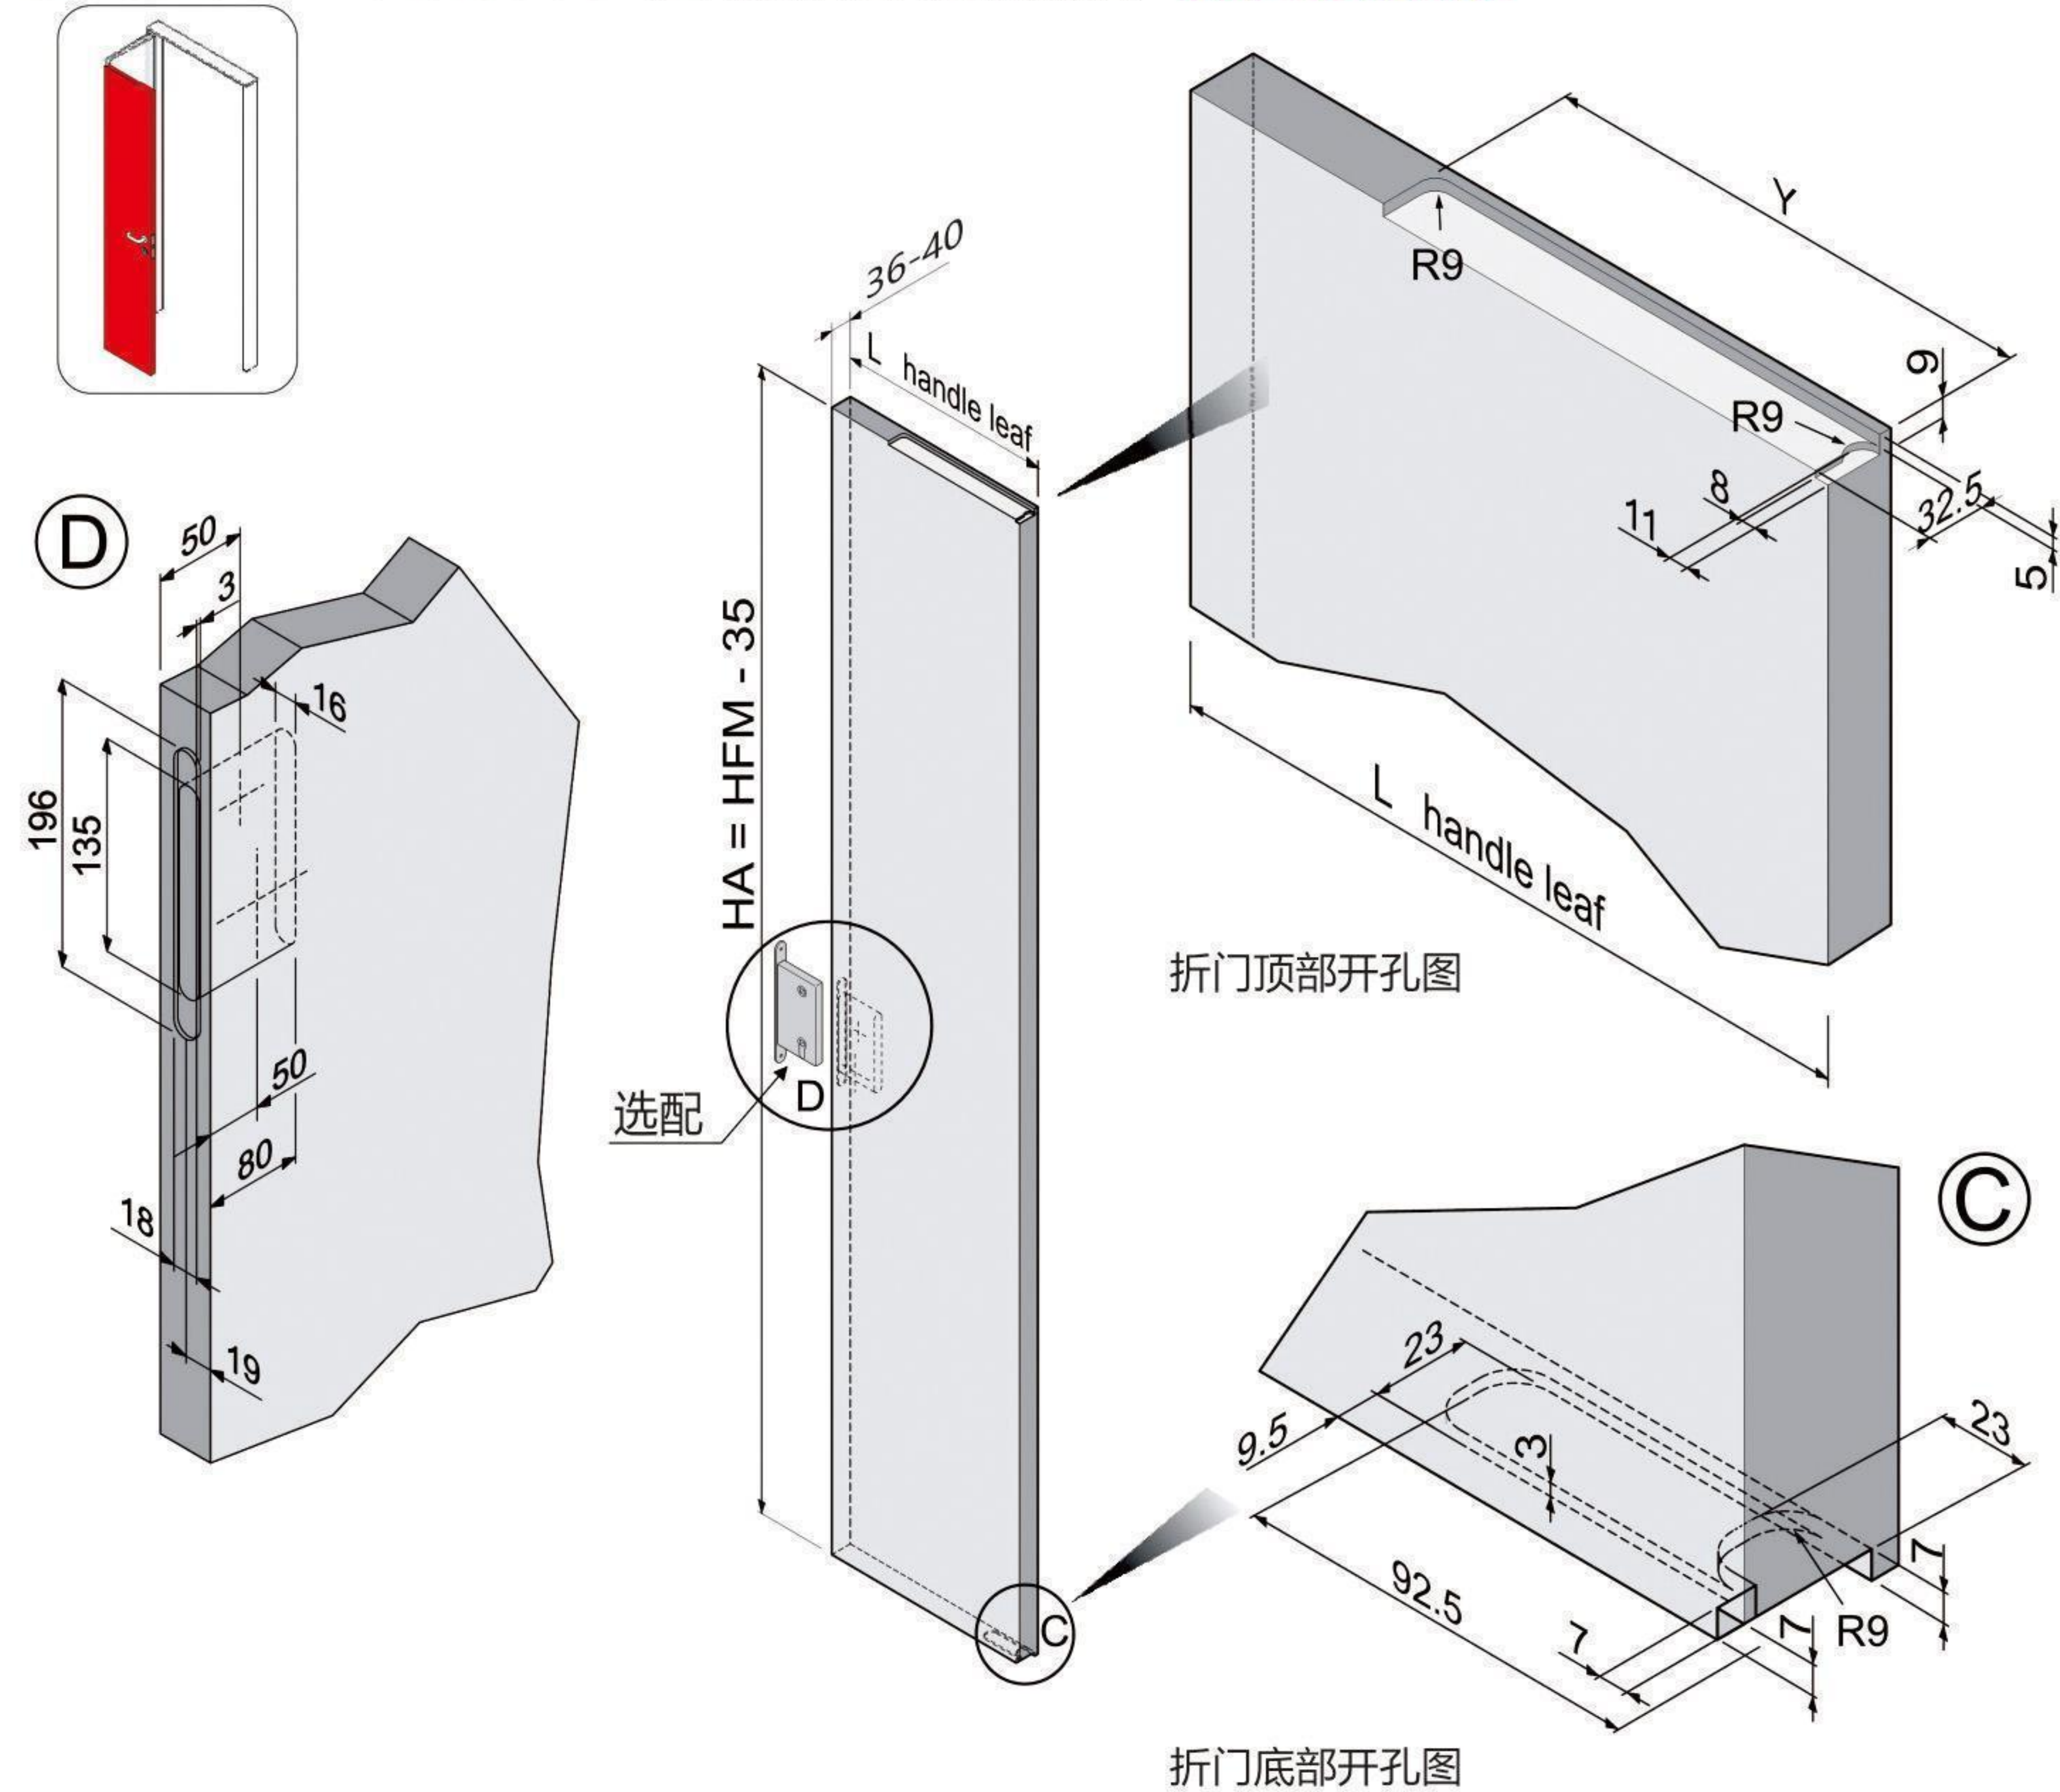

- 此配件为选配配件, 可根据客户要求选配
- 如客人自配锁身, 则无需按(图D)数据开孔

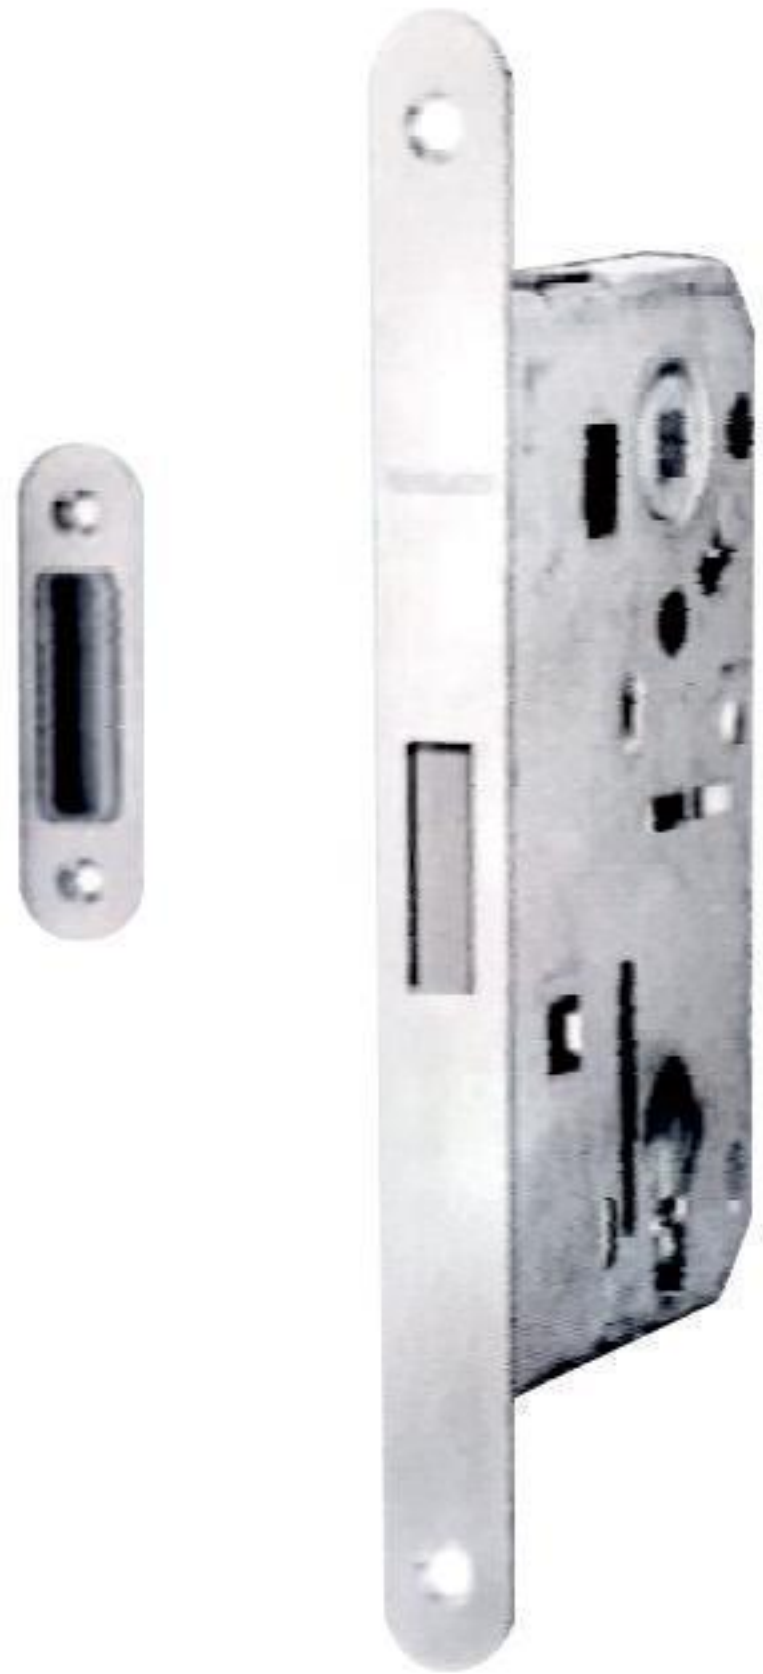

SCL-153/
磁力锁身及锁口片
沙钢色(SC)、黑色(BK)
(选配)



SCL-154A
55x8mm膨胀锁芯
单边锁把用(选配)




SCL-C213030/T/K/
600mm房门锁胆(选配)
沙钢色(SC)、黑色(BK)




SCL-C213030/T/B/SN
60mm浴室门锁胆(选配)
沙钢色(SC)、黑色(BK)

Door hardware mounting holes for both door systems (两门上配件安装开孔数据)

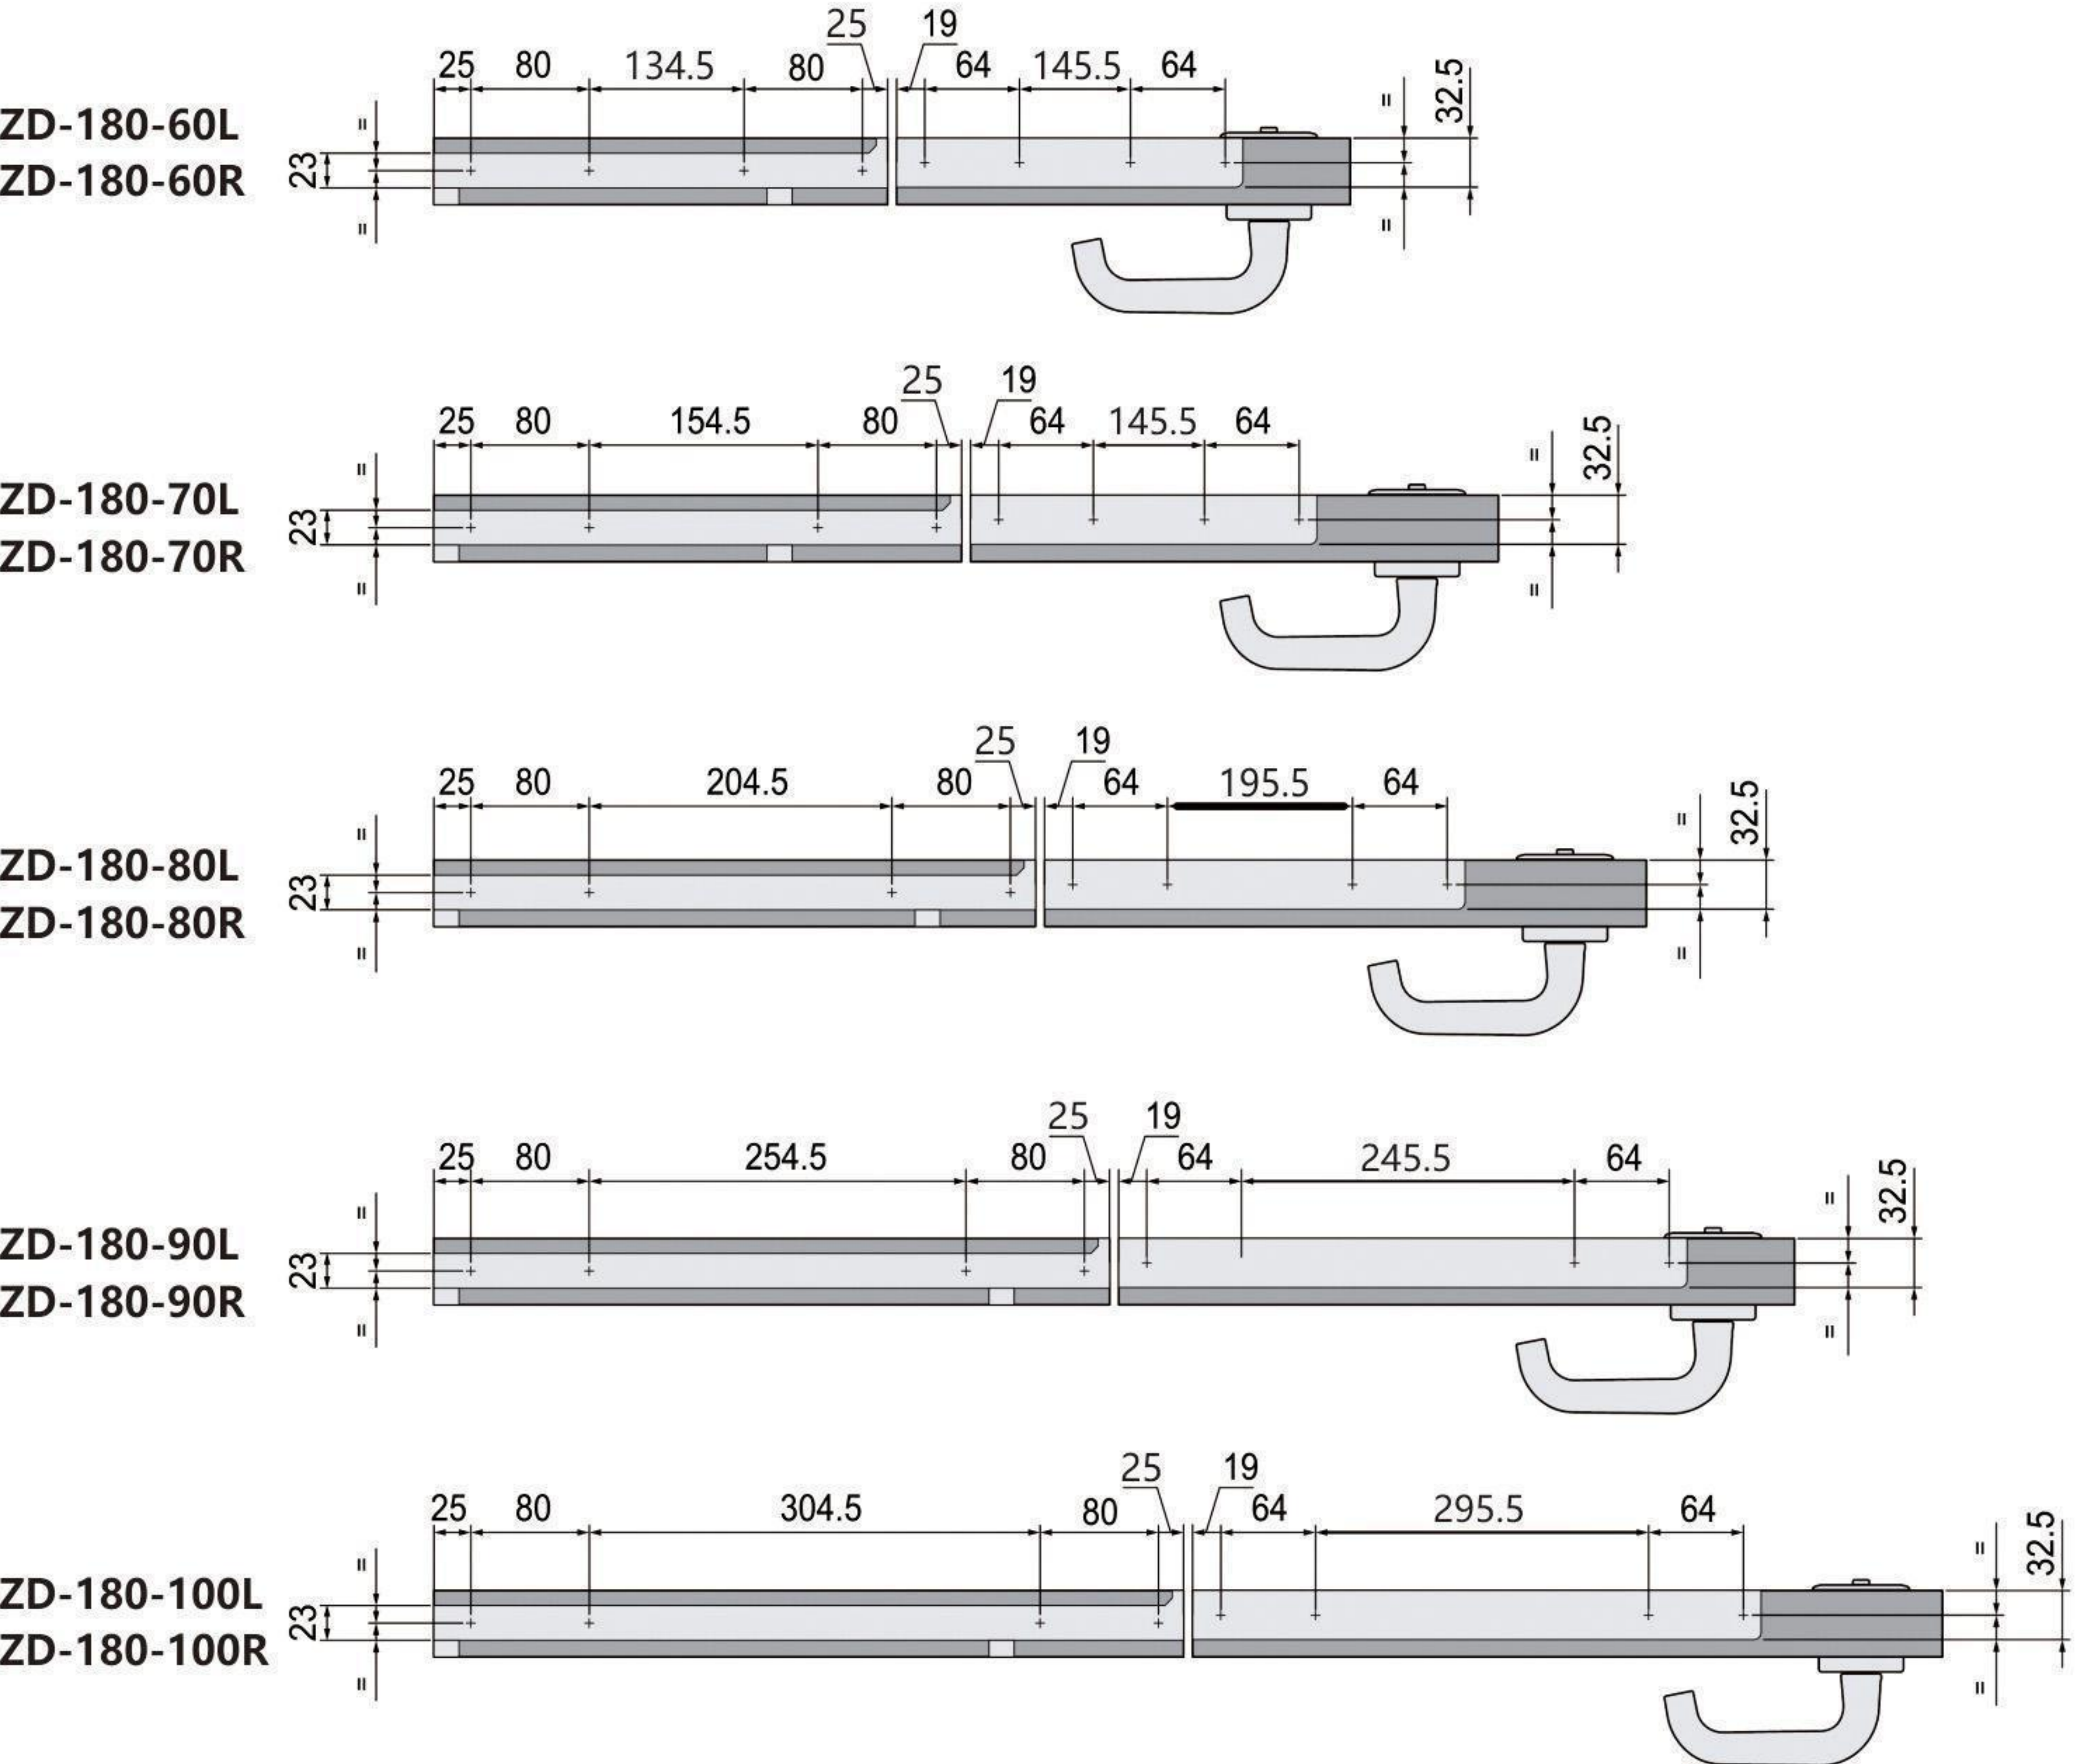


ASSEMBLING (安装步骤)


1. According to steps ① ② ③ screw the fittings to the door panel , respectively.
按步骤①②③分别用螺丝固定配件在门板上

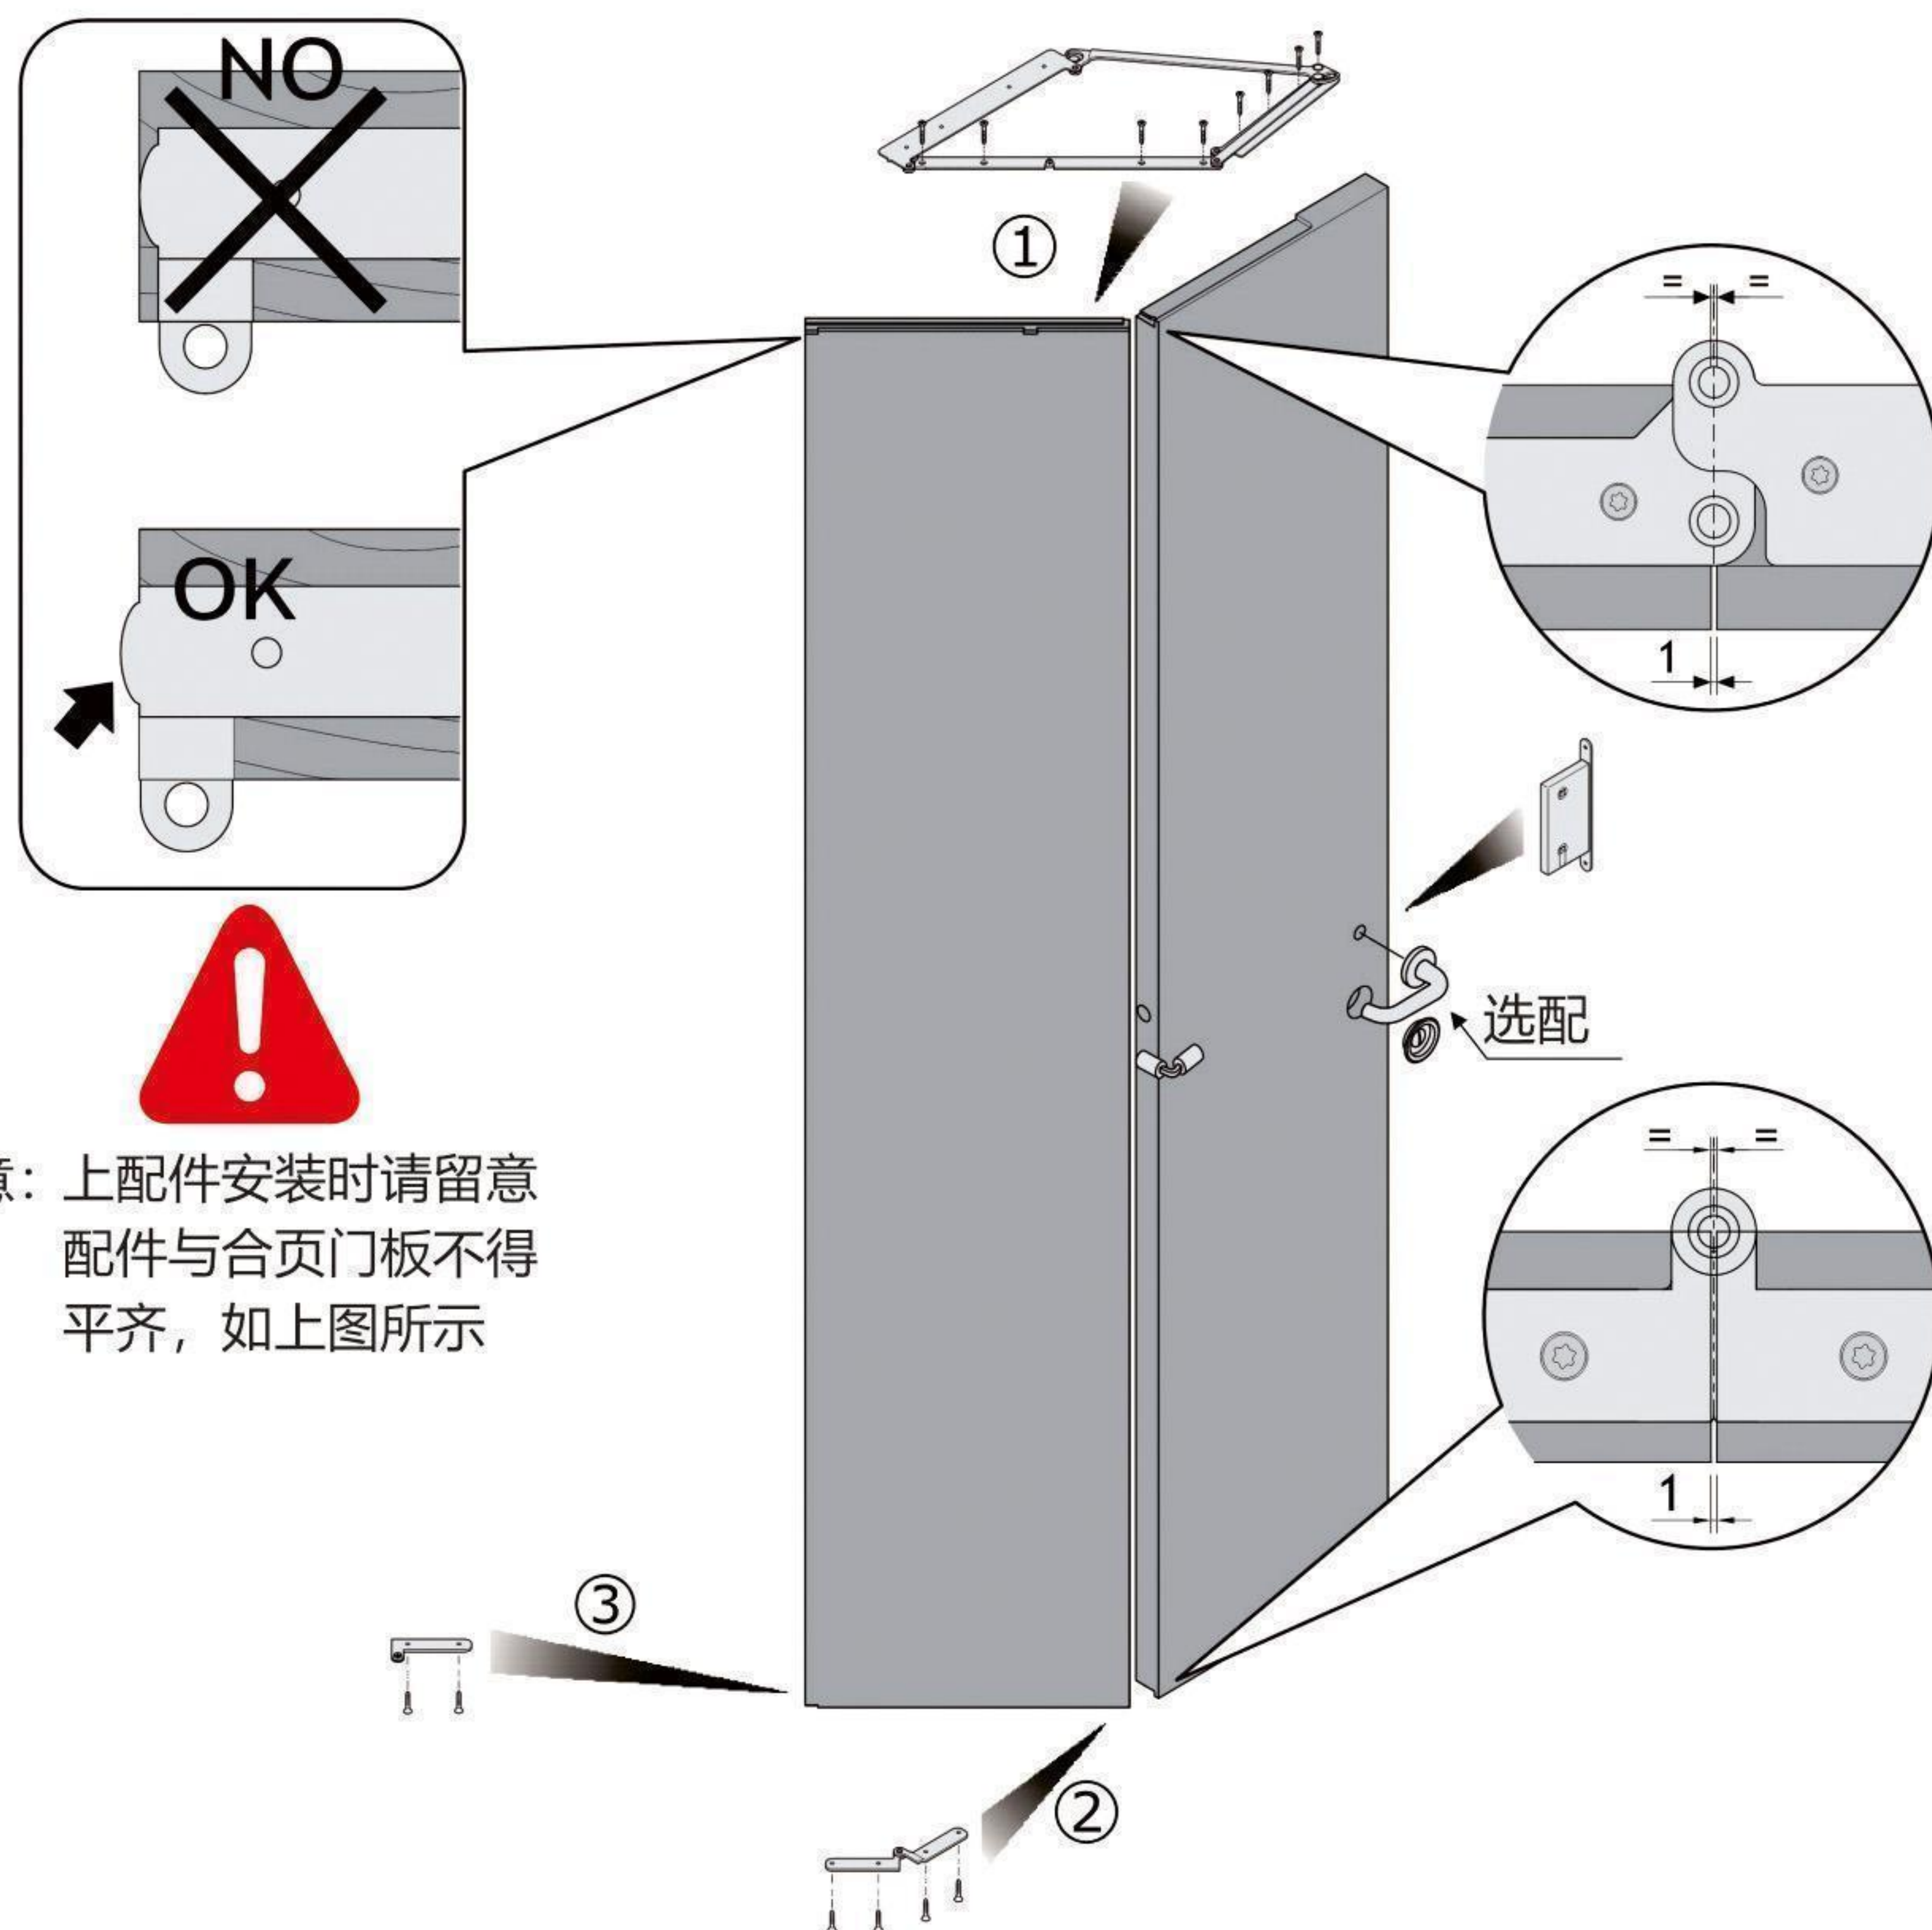

2. Screw the lower fittings and locking pieces(optional) to the door frame.
将下配件及锁口片(选配)用螺丝固定在门框上

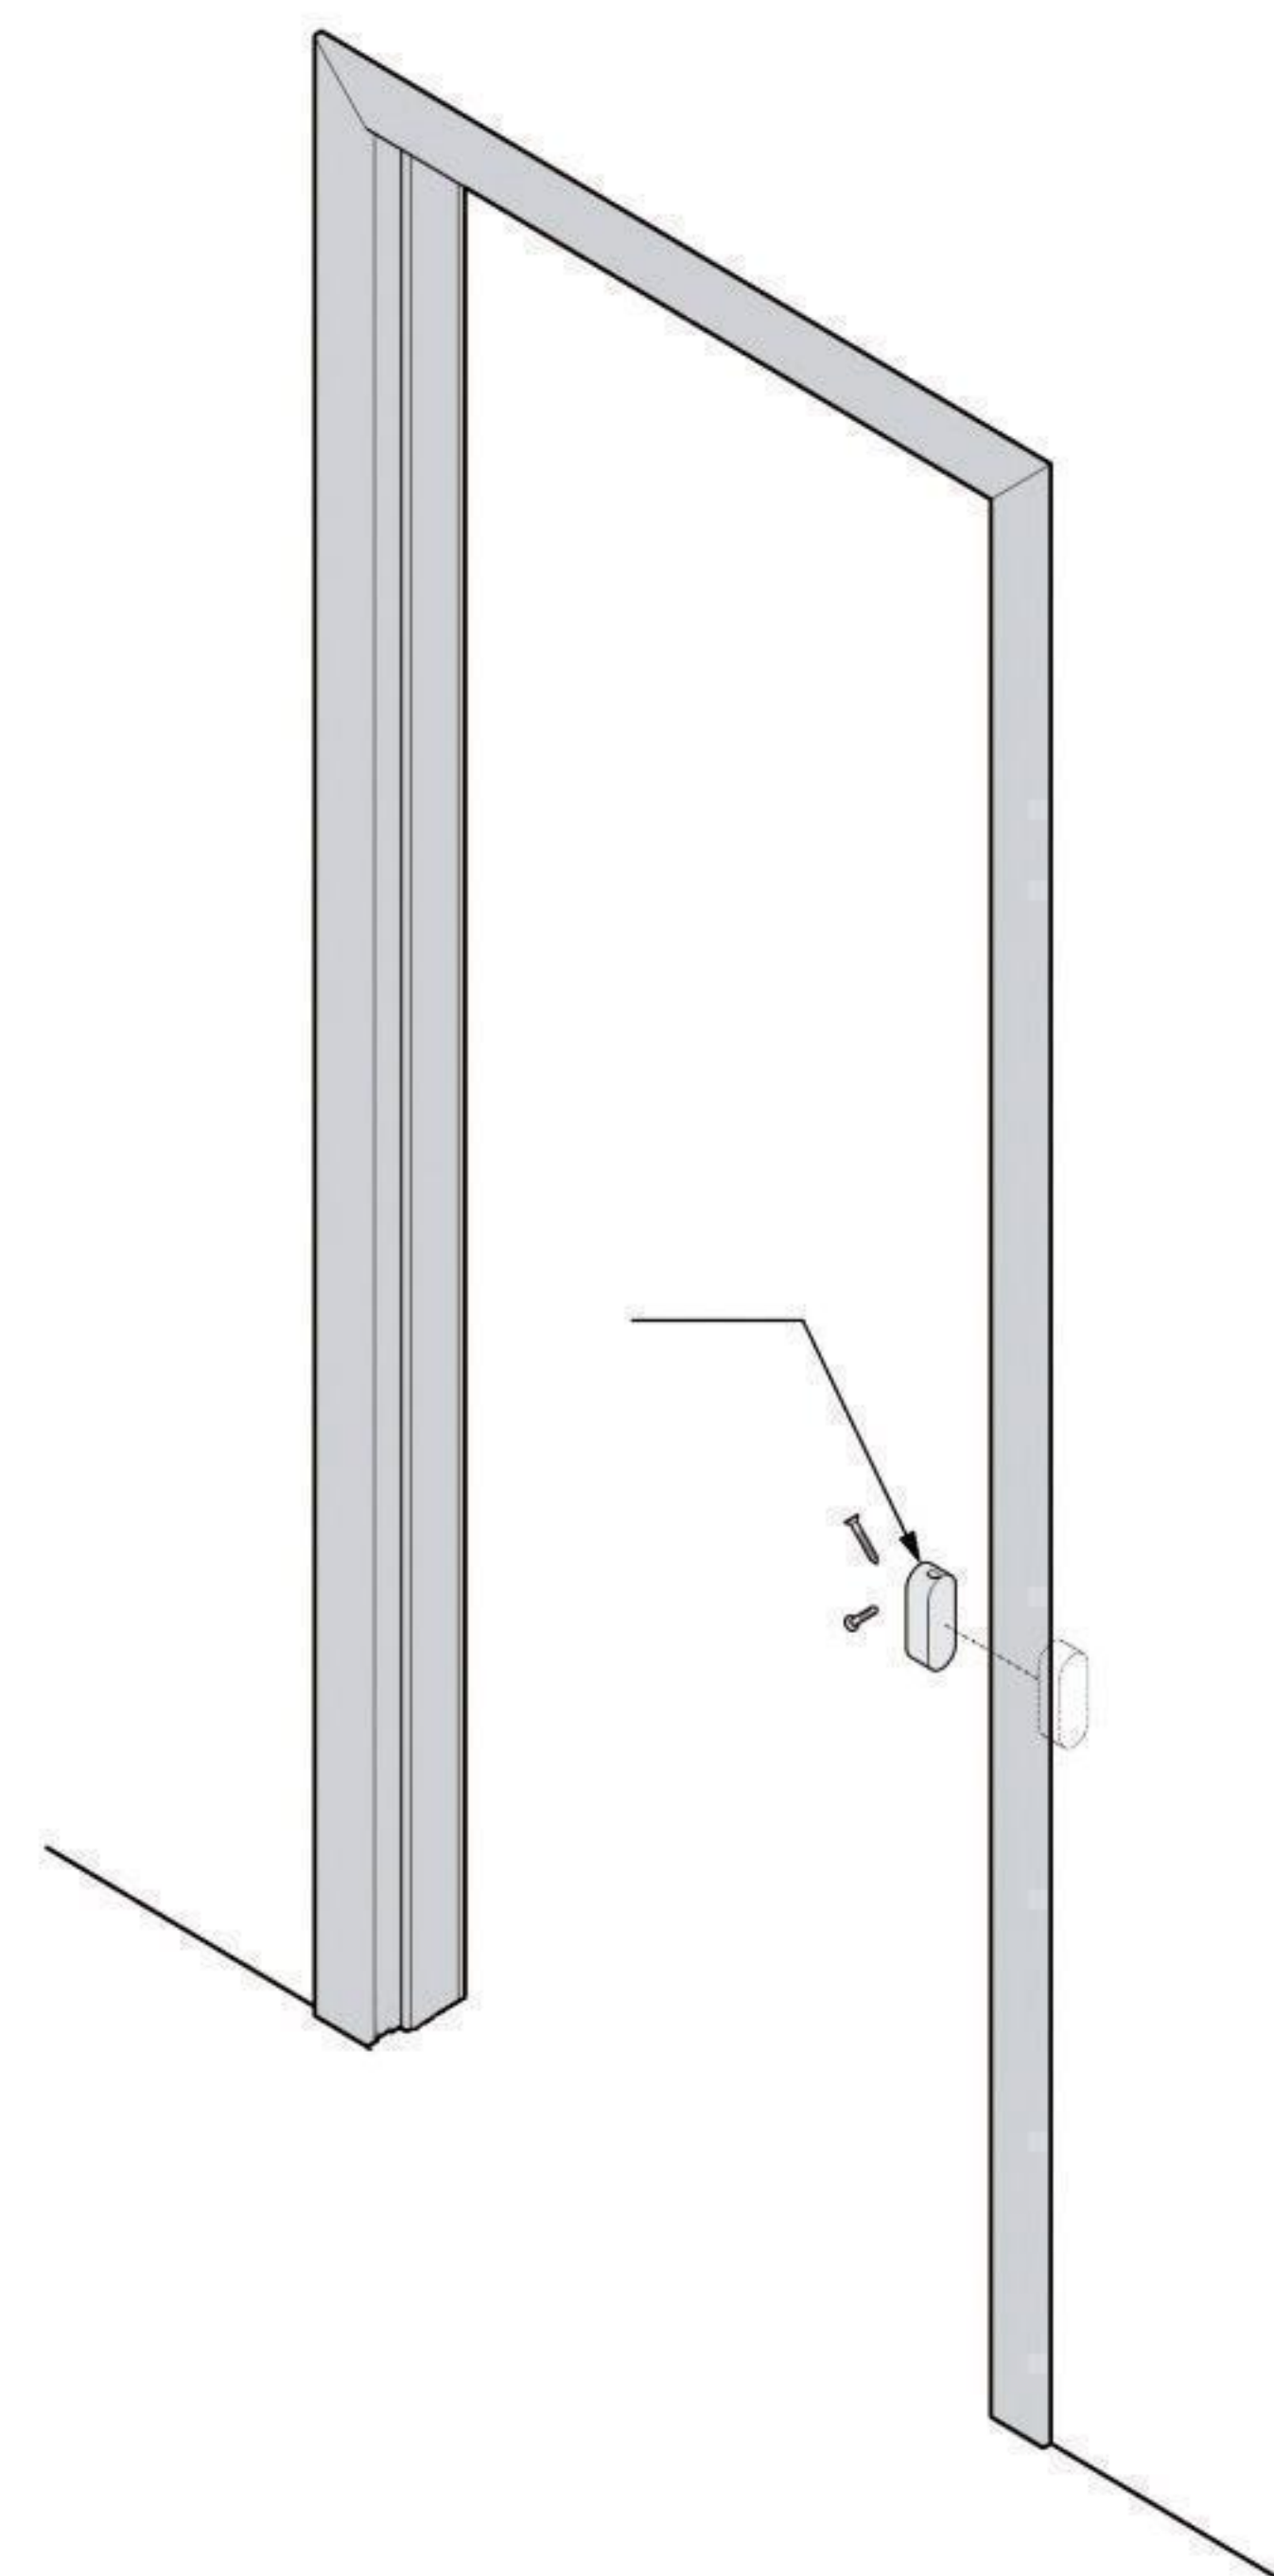

可选择意大利REGUITTI
房门把手(选配)

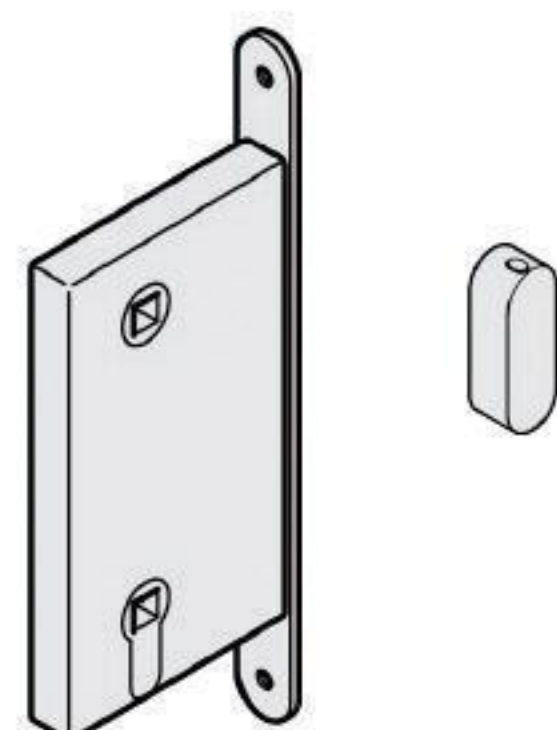

S-2389L/SC
浴室磁力锁身+开关门扭制
沙钢色(选配)

3. Place the lower door fittings in the lower door frame (Figure ⑥), push the folding door and upper fittings into the door frame and fix it (Figure ⑦).

将下门配件放入门框下配件中(如图⑥),把折门及上配件推进门框并固定(如图⑦)

