
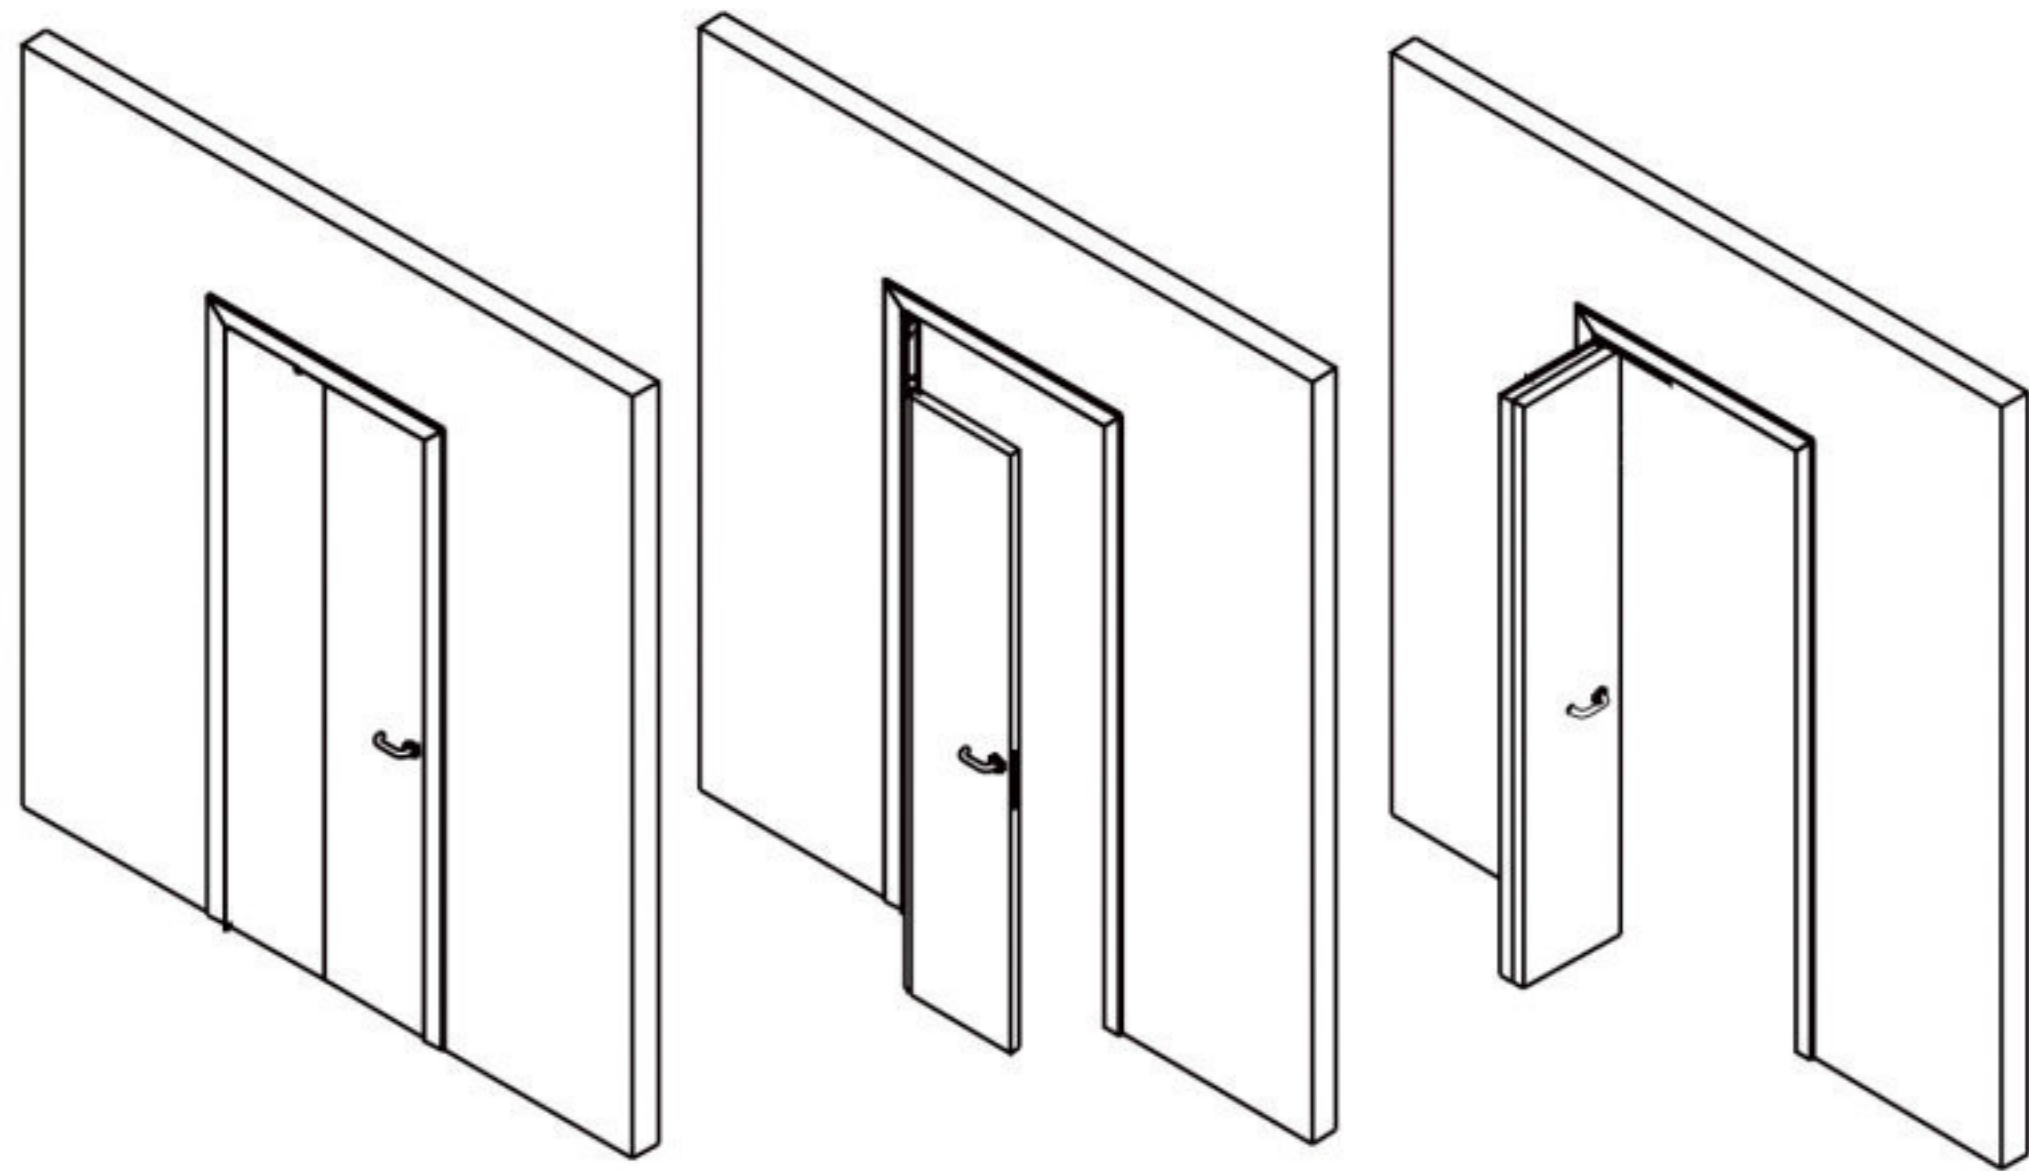


产品特点:

Product features:

- 可靠、有保障的专利技术
 - 节省室内空间的折门系统
 - 两门最大负重: 40kg
 - 门板厚度: 36-40mm
 - 通过20万次开关测试
 - 适用室内门, 通道门、客厅门、饭厅门、浴室门等等
-
- Reliable and guaranteed patented technology
 - Folding door system for saving indoor space
 - Maximum load: 40kg
 - Door panel thickness: 36-40mm
 - 200000 switch tests passed
 - Applicable to indoor doors, Access door, Living room door, Dining room door, Bathroom door, wait

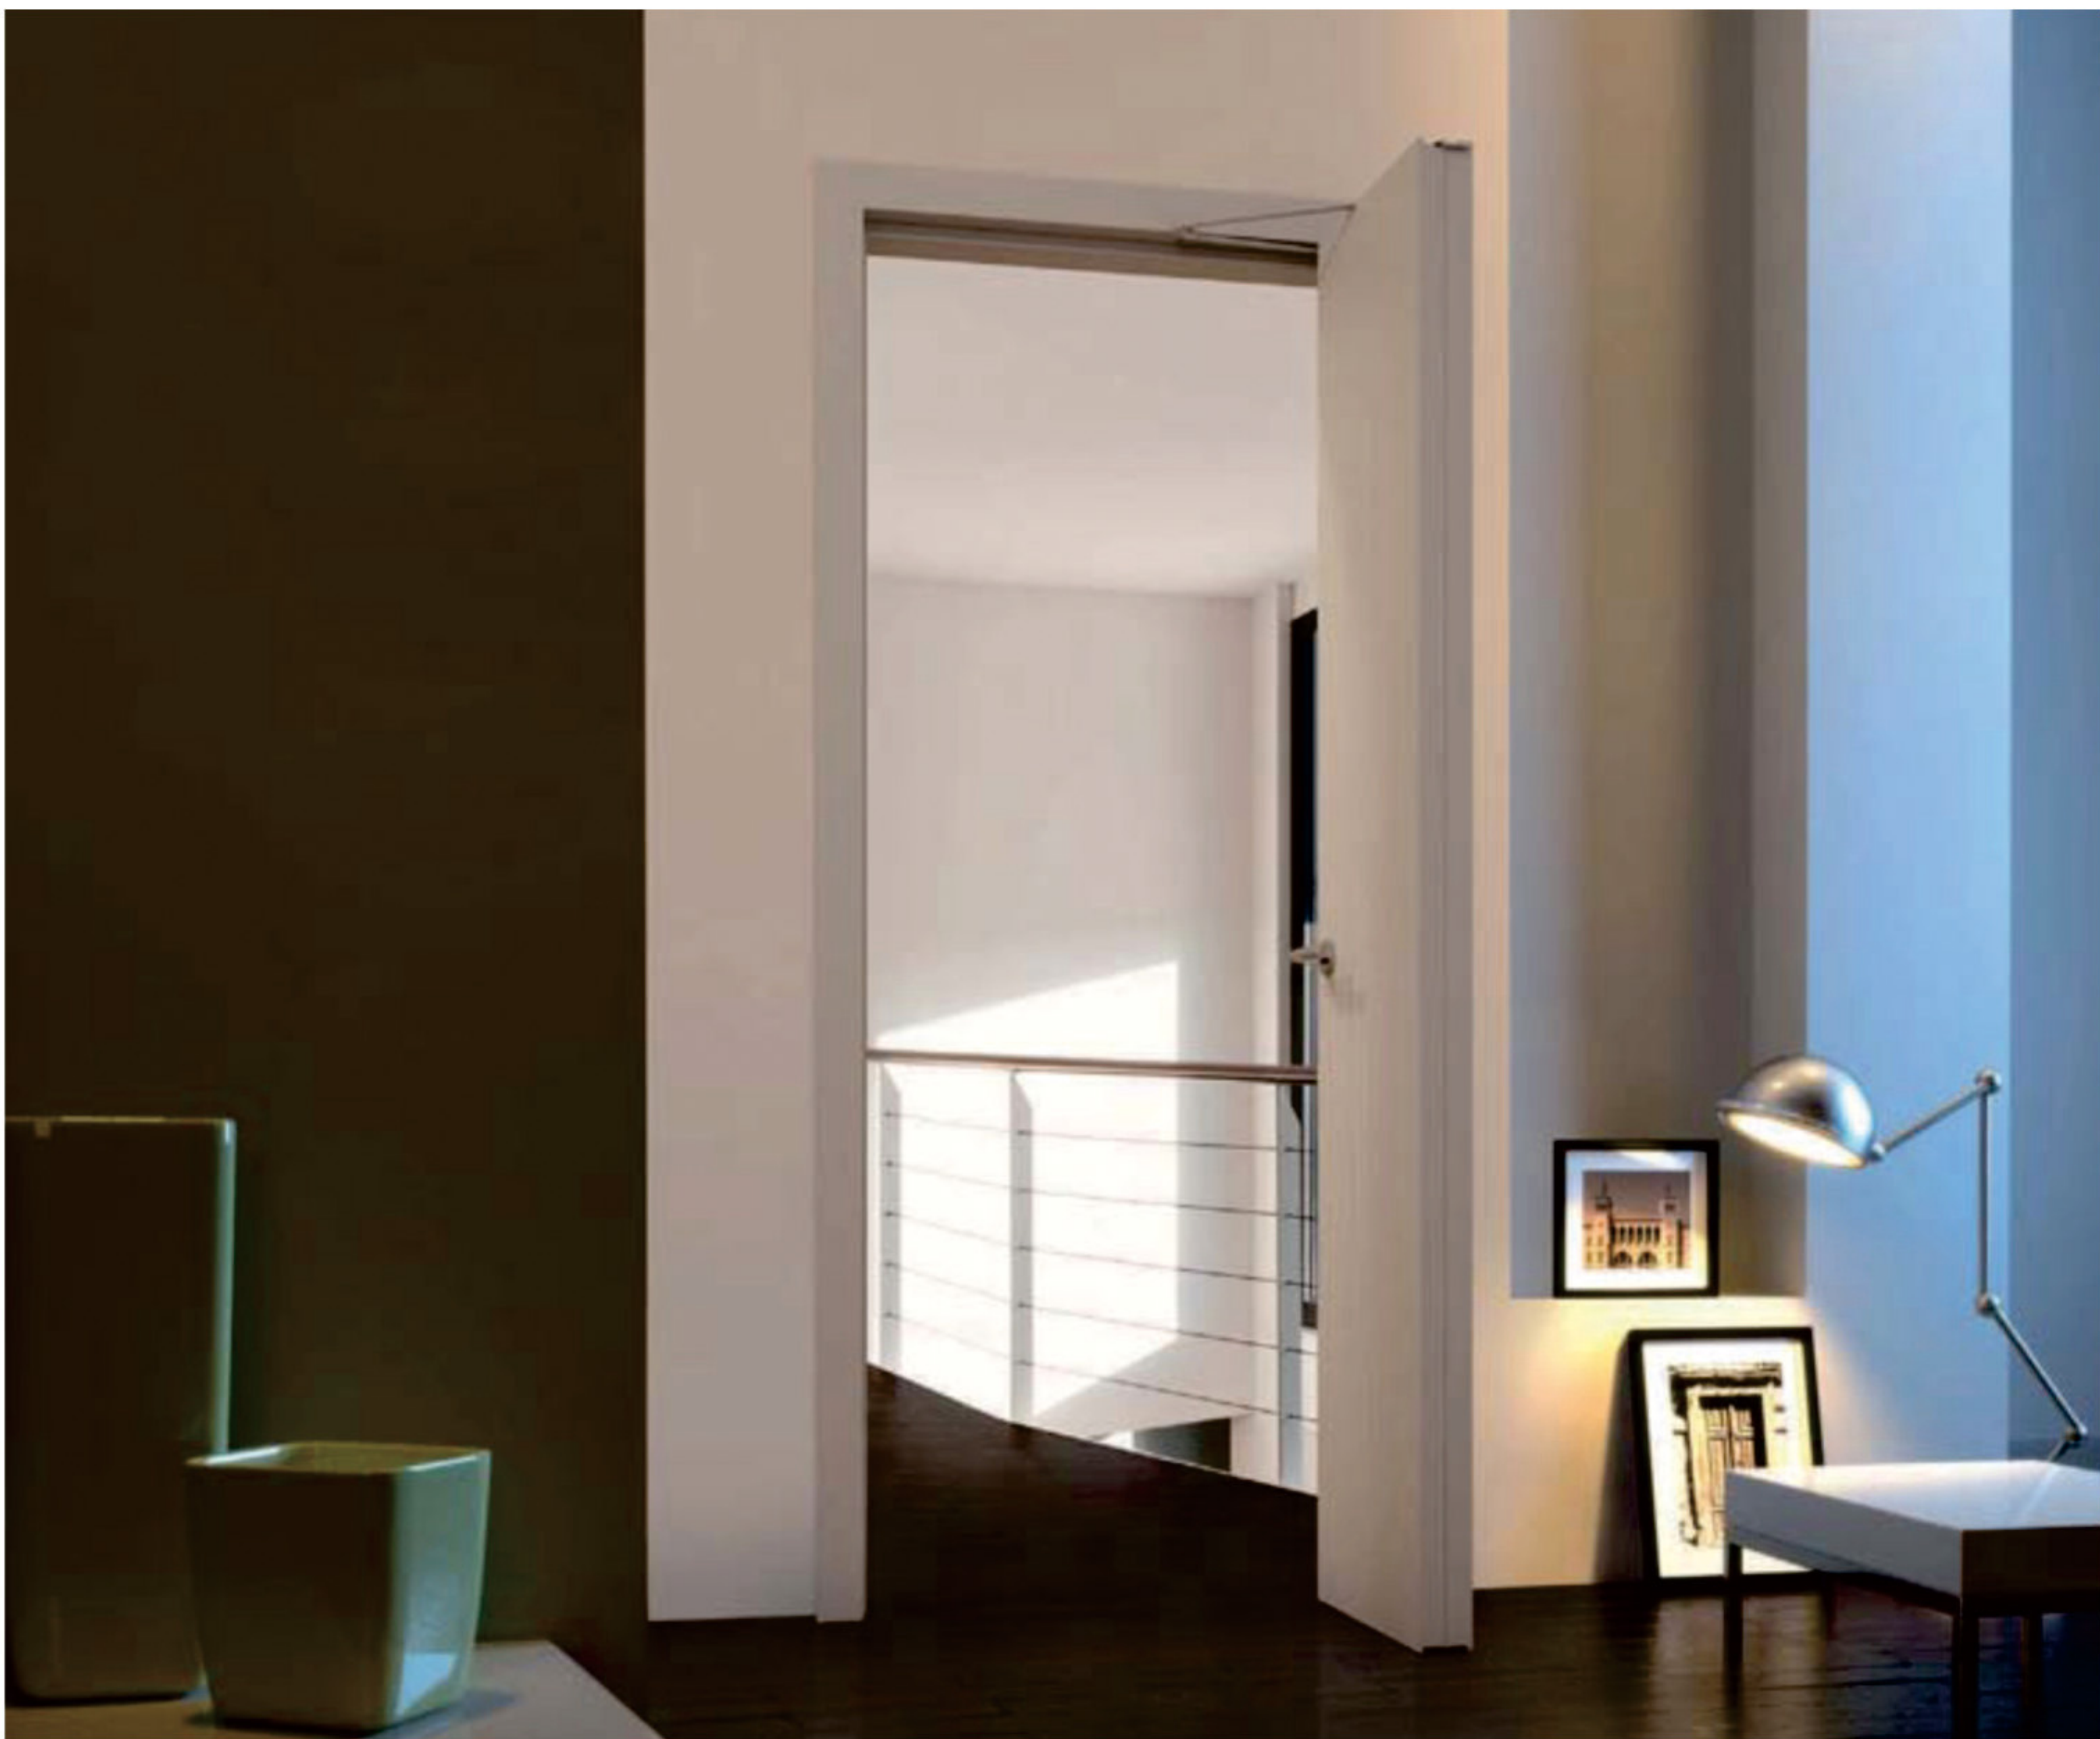

ZD-90

品名: 90°折门配件
规格: 36-40mm厚门
材料: 304钢材
颜色: 可选
包装: 1套/盒



ZD-90-70R ≤720mm 墙洞
ZD-90-80R ≤820mm 墙洞
ZD-90-90R ≤920 mm墙洞

Compact living 90° 折叠门配件 (右门)
(1套/盒)



ZD-90-70L ≤720mm 墙洞
ZD-90-80L ≤820mm 墙洞
ZD-90-90L ≤920 mm墙洞

Compact living 90° 折叠门配件 (左门)
(1套/盒)




90°双折门系统

90 ° double folding door system

Dimensional diagram of the door-symmetric leaves (对等门尺寸图)

对等门 (两门同等大小)						
LFM 墙洞宽度	L hinge door 合页边门	L handle door 把手边门	Z 折门移动空间	V 超越门框空间	Art COMPACT/型号	
					左折门	右折门
720	356.5	356.5	347	15	ZD-90-70L	ZD-90-70R
820	406.5	406.5	397	0	ZD-90-80L	ZD-90-80R
920	456.5	456.5	447	20	ZD-90-90L	ZD-90-90R

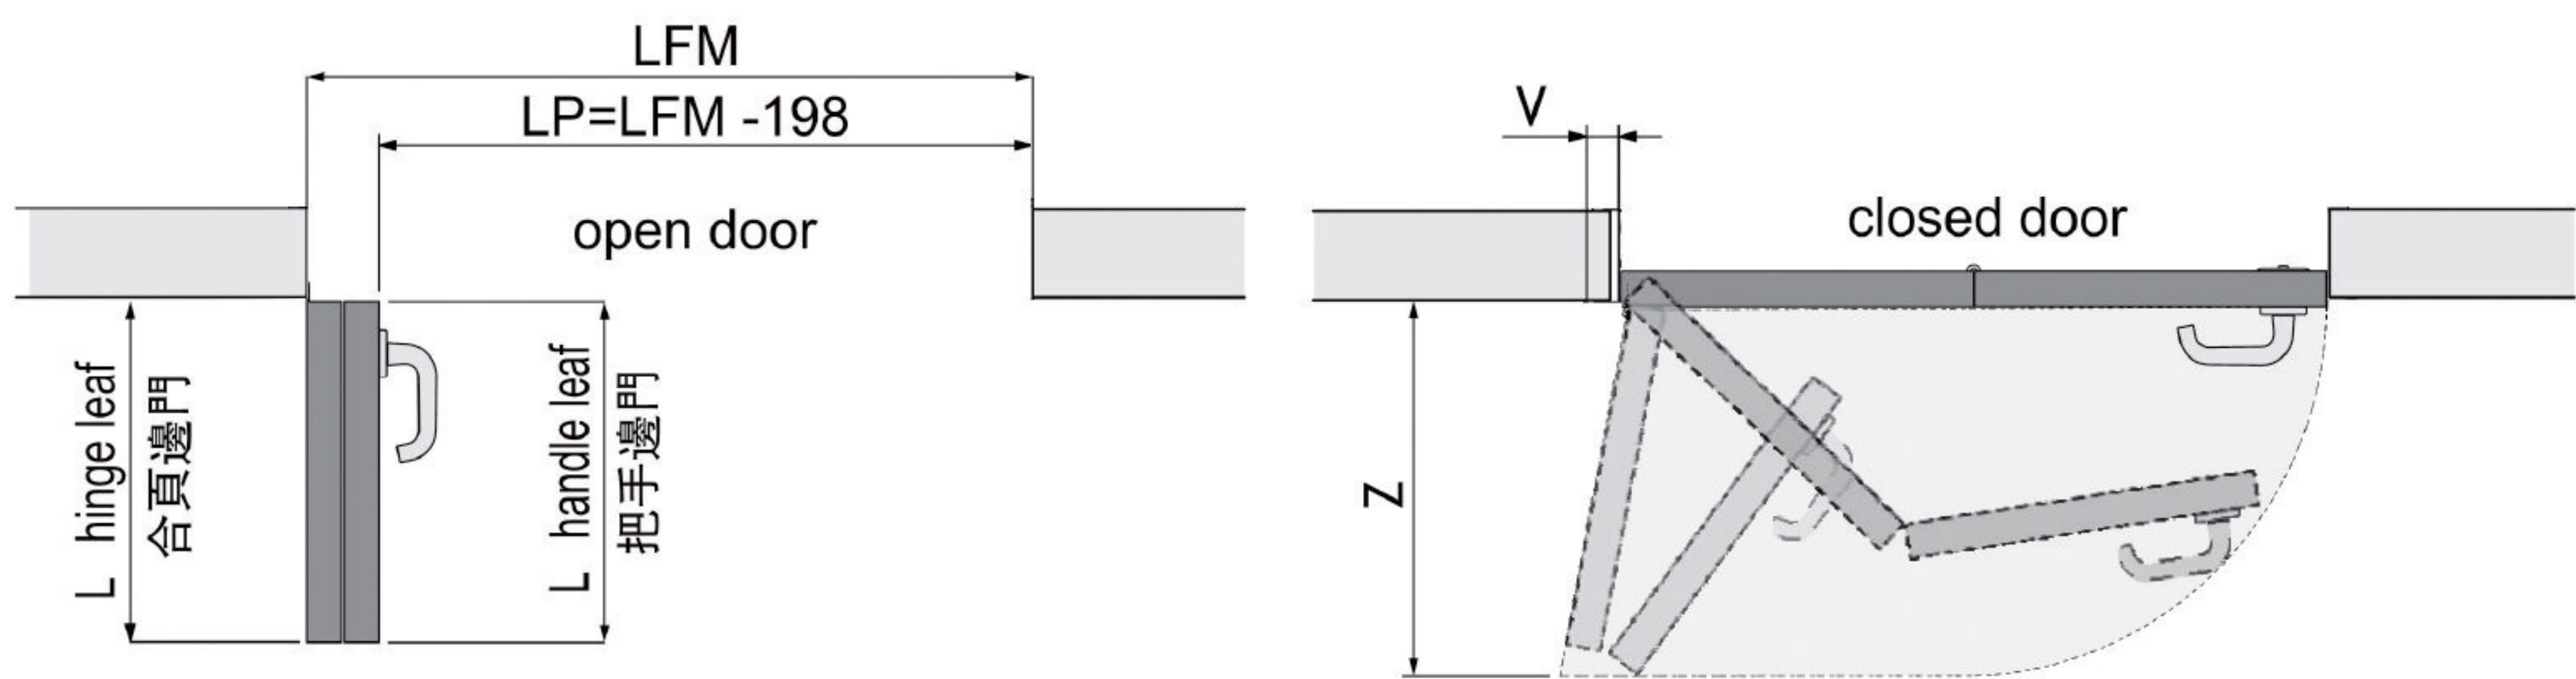


门高=门洞高-13

举例：
For example:

门洞宽=720mm
 $(720-7) \div 2 = 356.5$
(门扇宽)

Dimensional diagram of the door-asymmetric leaves (不对等门尺寸图)

不对等门 (合页边门 > 把手边门)							
LFM 墙洞宽度	LP 通道宽度	L hinge door 合页边门	L handle door 把手边门	Z 折门移动空间	V 超越门框空间	Art COMPACT/型号	
						左折门	右折门
545-720	502-602	356.5	206.5-356.5	397	0	ZD-90-70L	ZD-90-70R
595-820	602-702	406.5	306.5-406.5	447	20	ZD-90-80L	ZD-90-80R
645-920	702-802	456.5	356.5-456.5	497	110	ZD-90-90L	ZD-90-90R

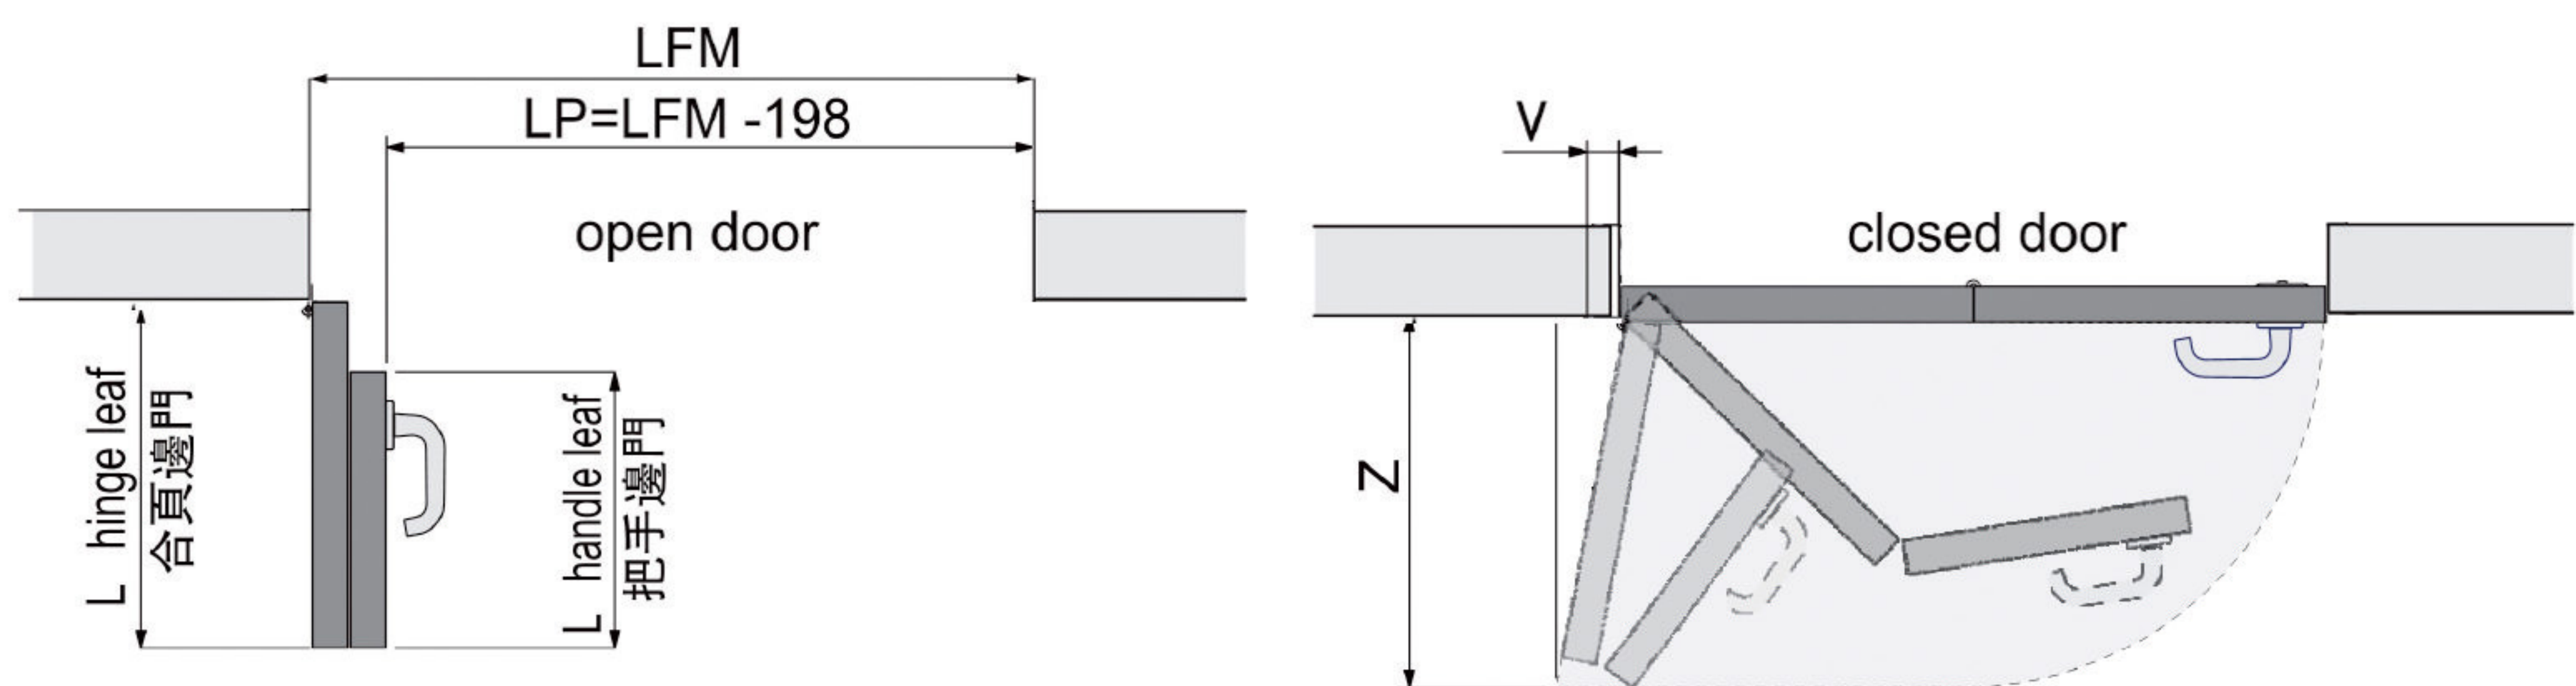


门高=门洞高-13


举例：
For example:

门洞宽775mm
775-7(门缝): 768
 $768 \div 2 = 384$
因合页边 > 把手边门
选80L或R
 $768-406.5 = 361.5$
合页门扇 > 把手门扇

Vertical section (門框及門高參數圖)

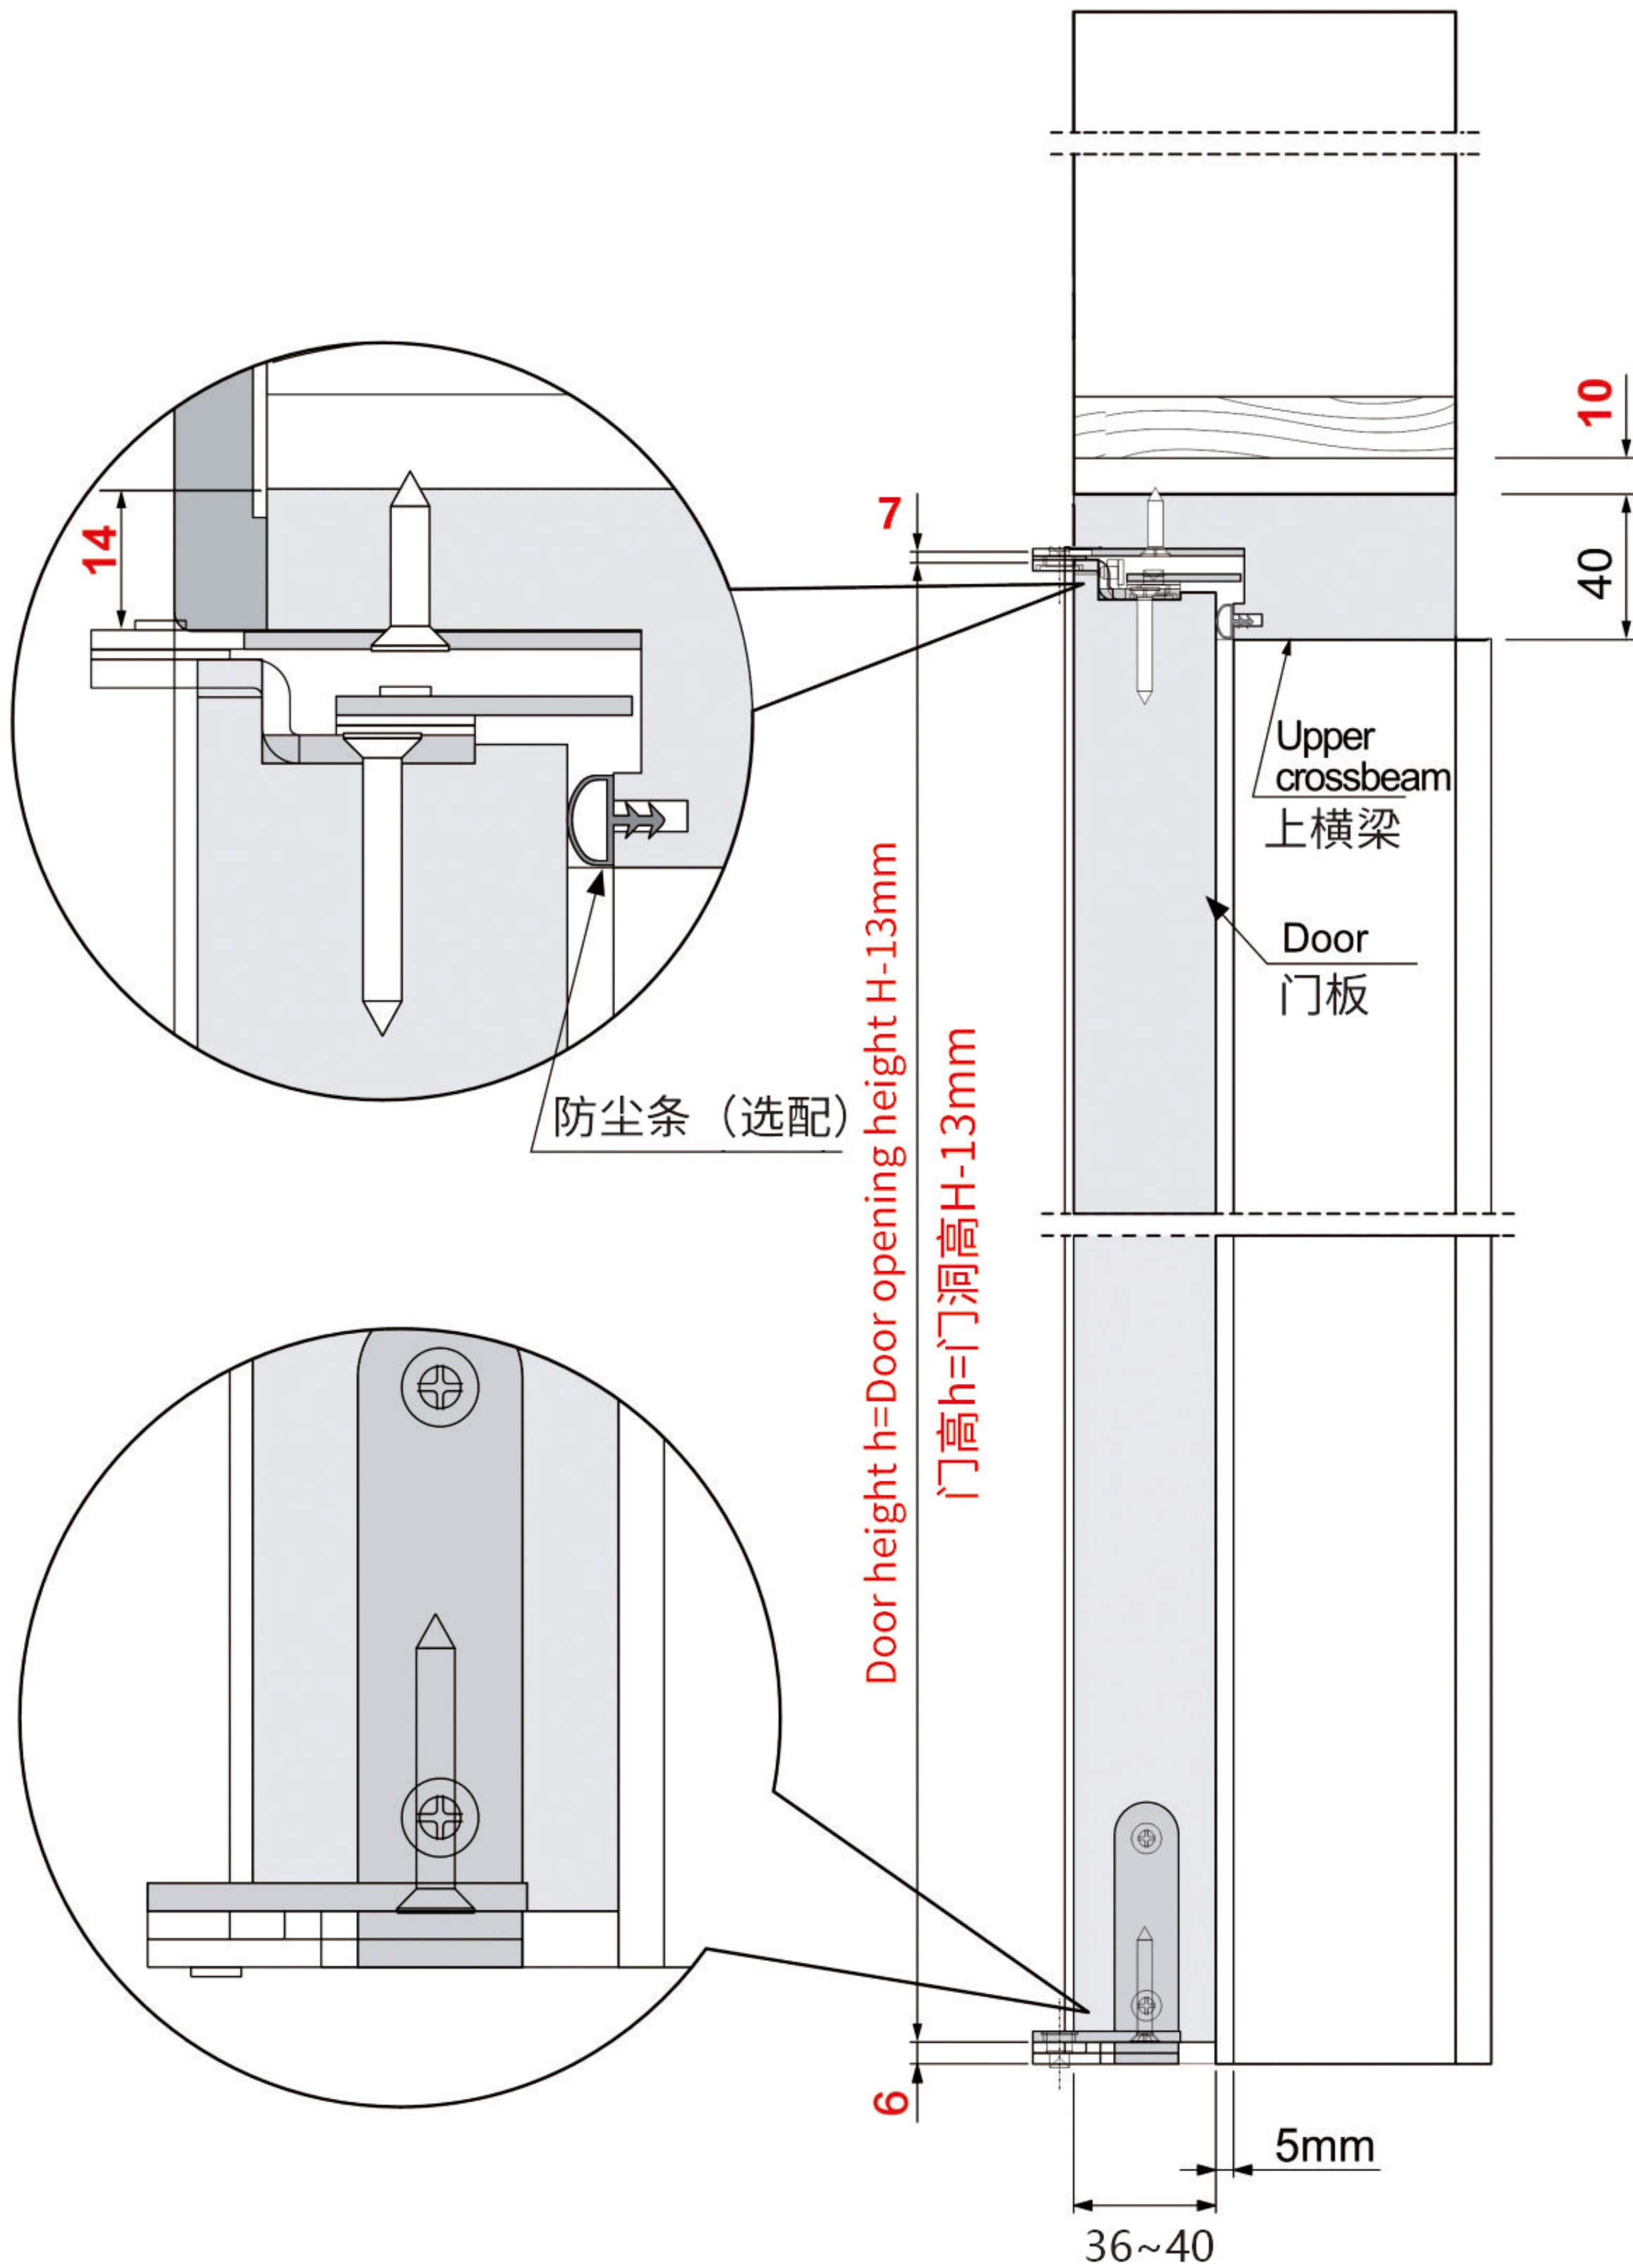

Horizontal section left door (左門框及門寬參數圖)

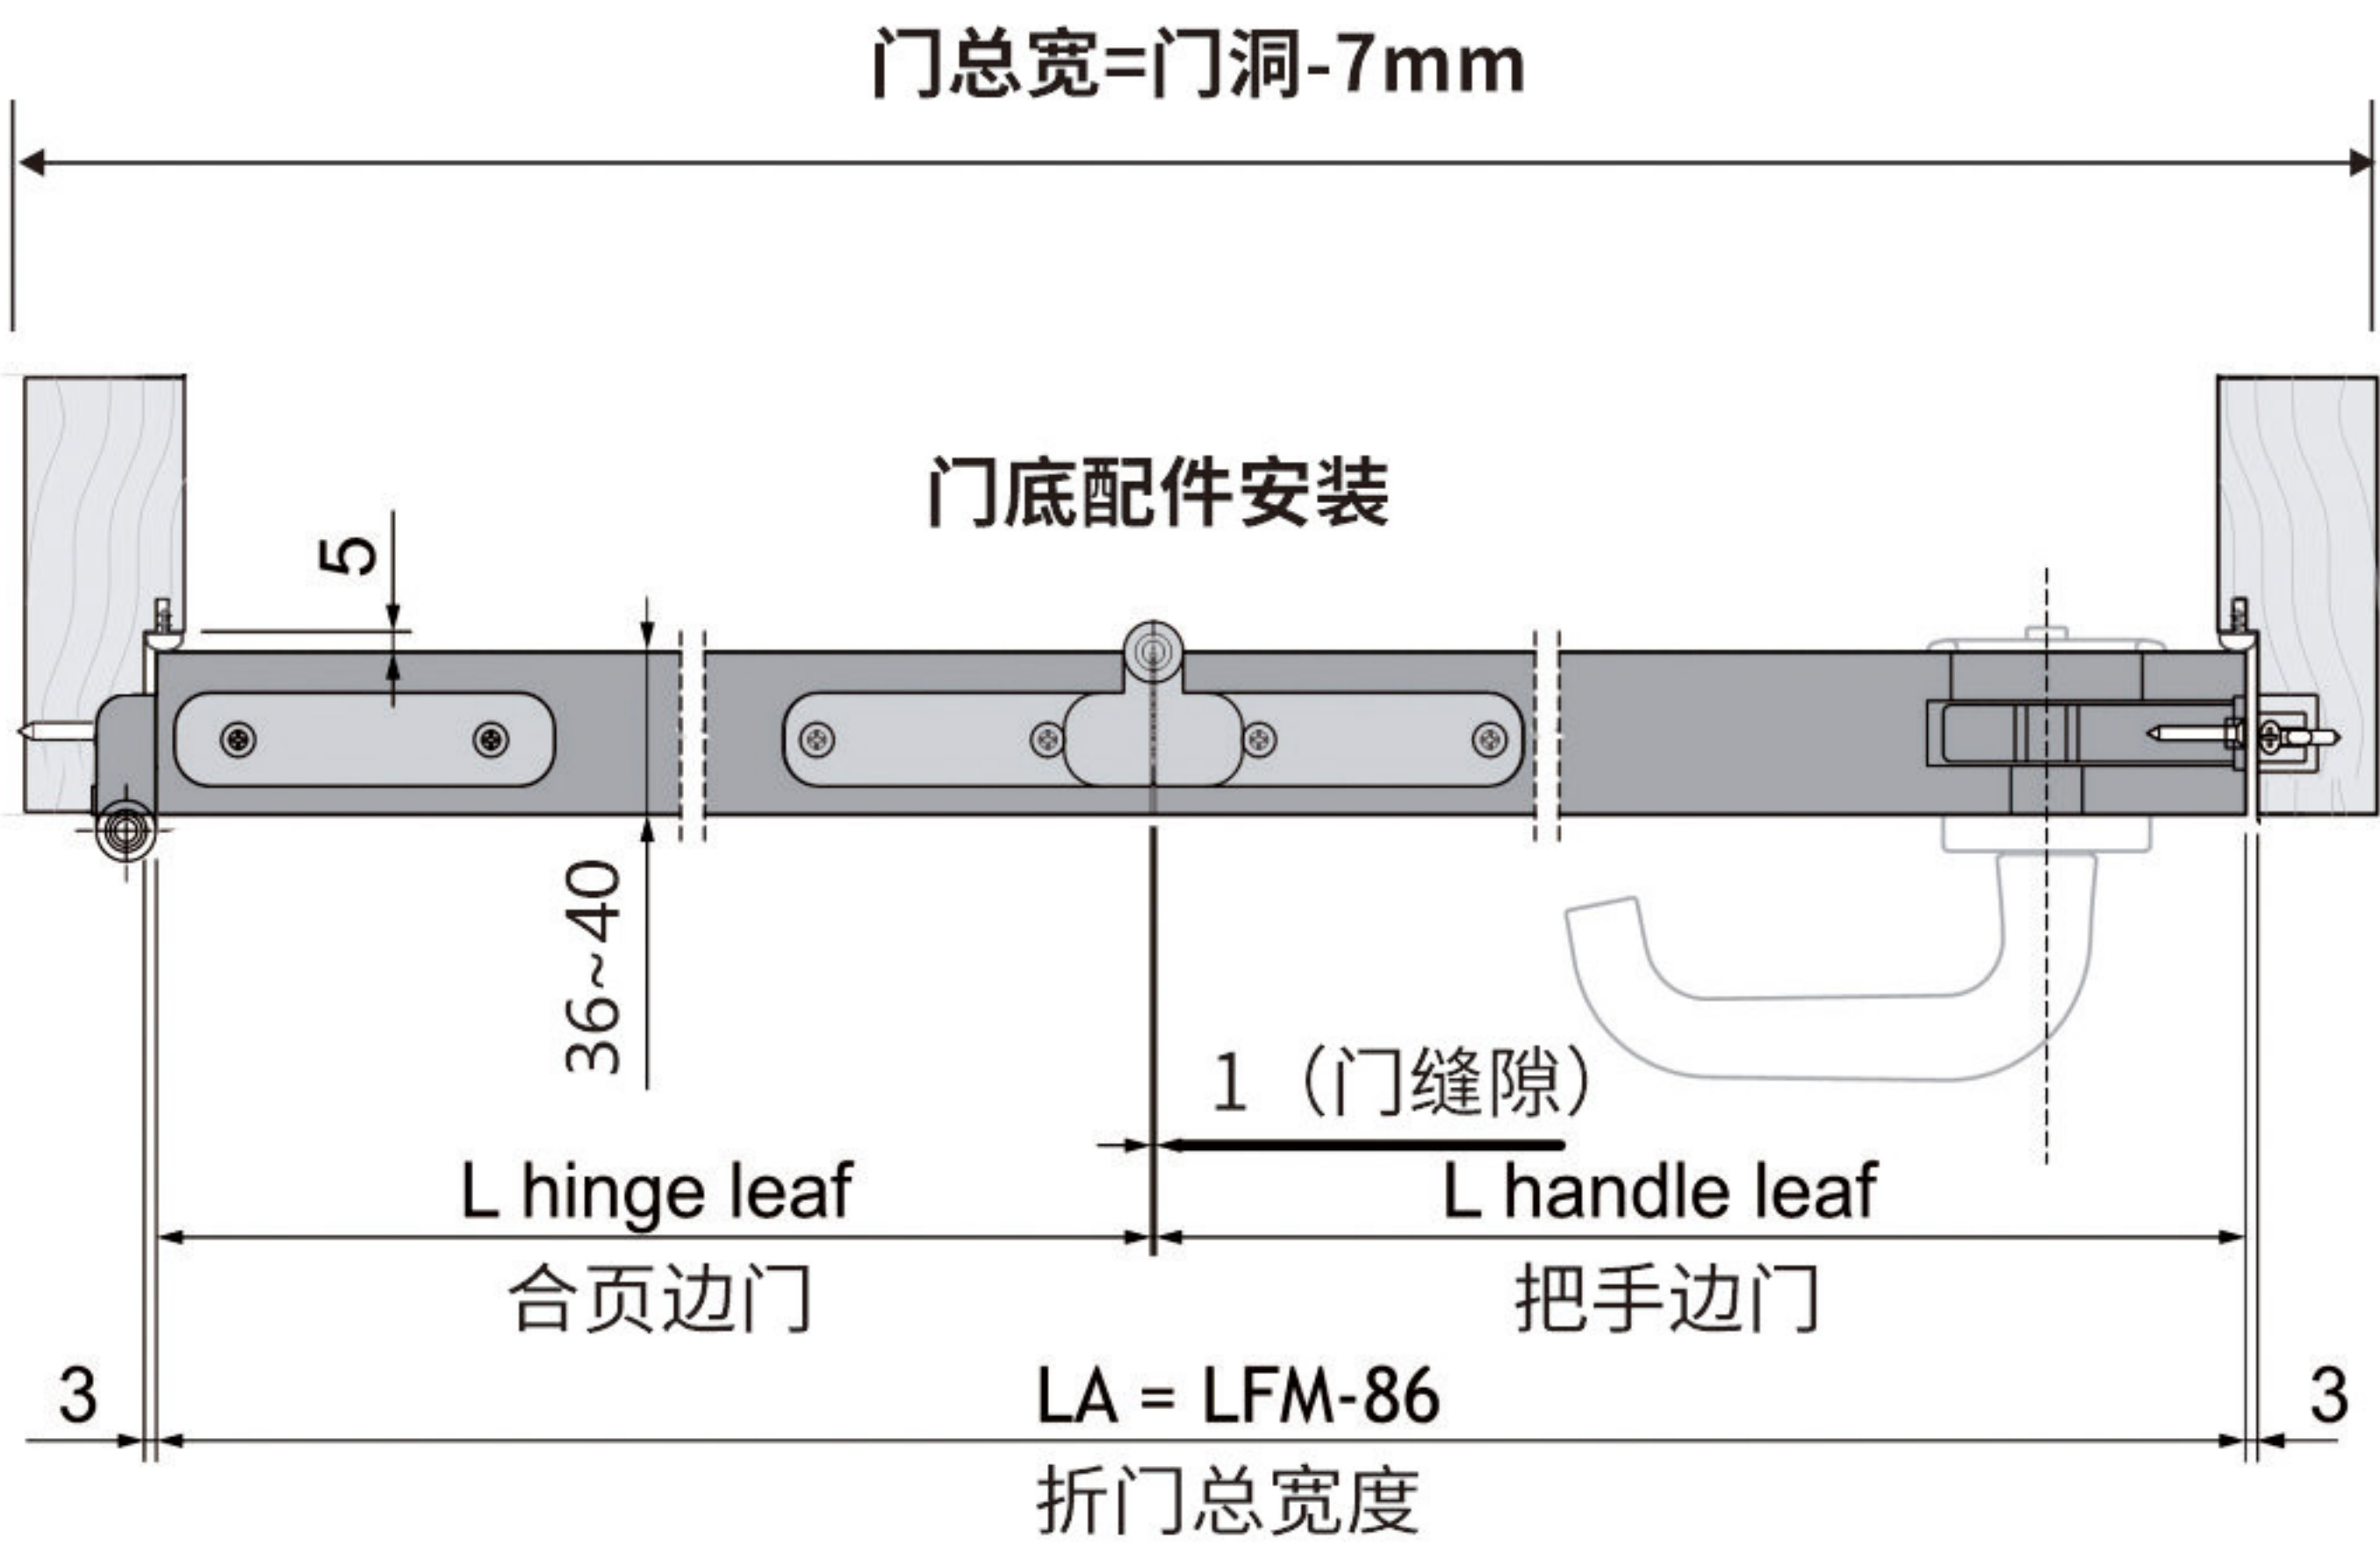


★ 把手邊門寬度計算數據

90°双折门系统

90 ° double folding door system


HFM=墙洞高度
HA=门

Left leaf door hinge side (左门合页边门开孔数据)右门与之相对称

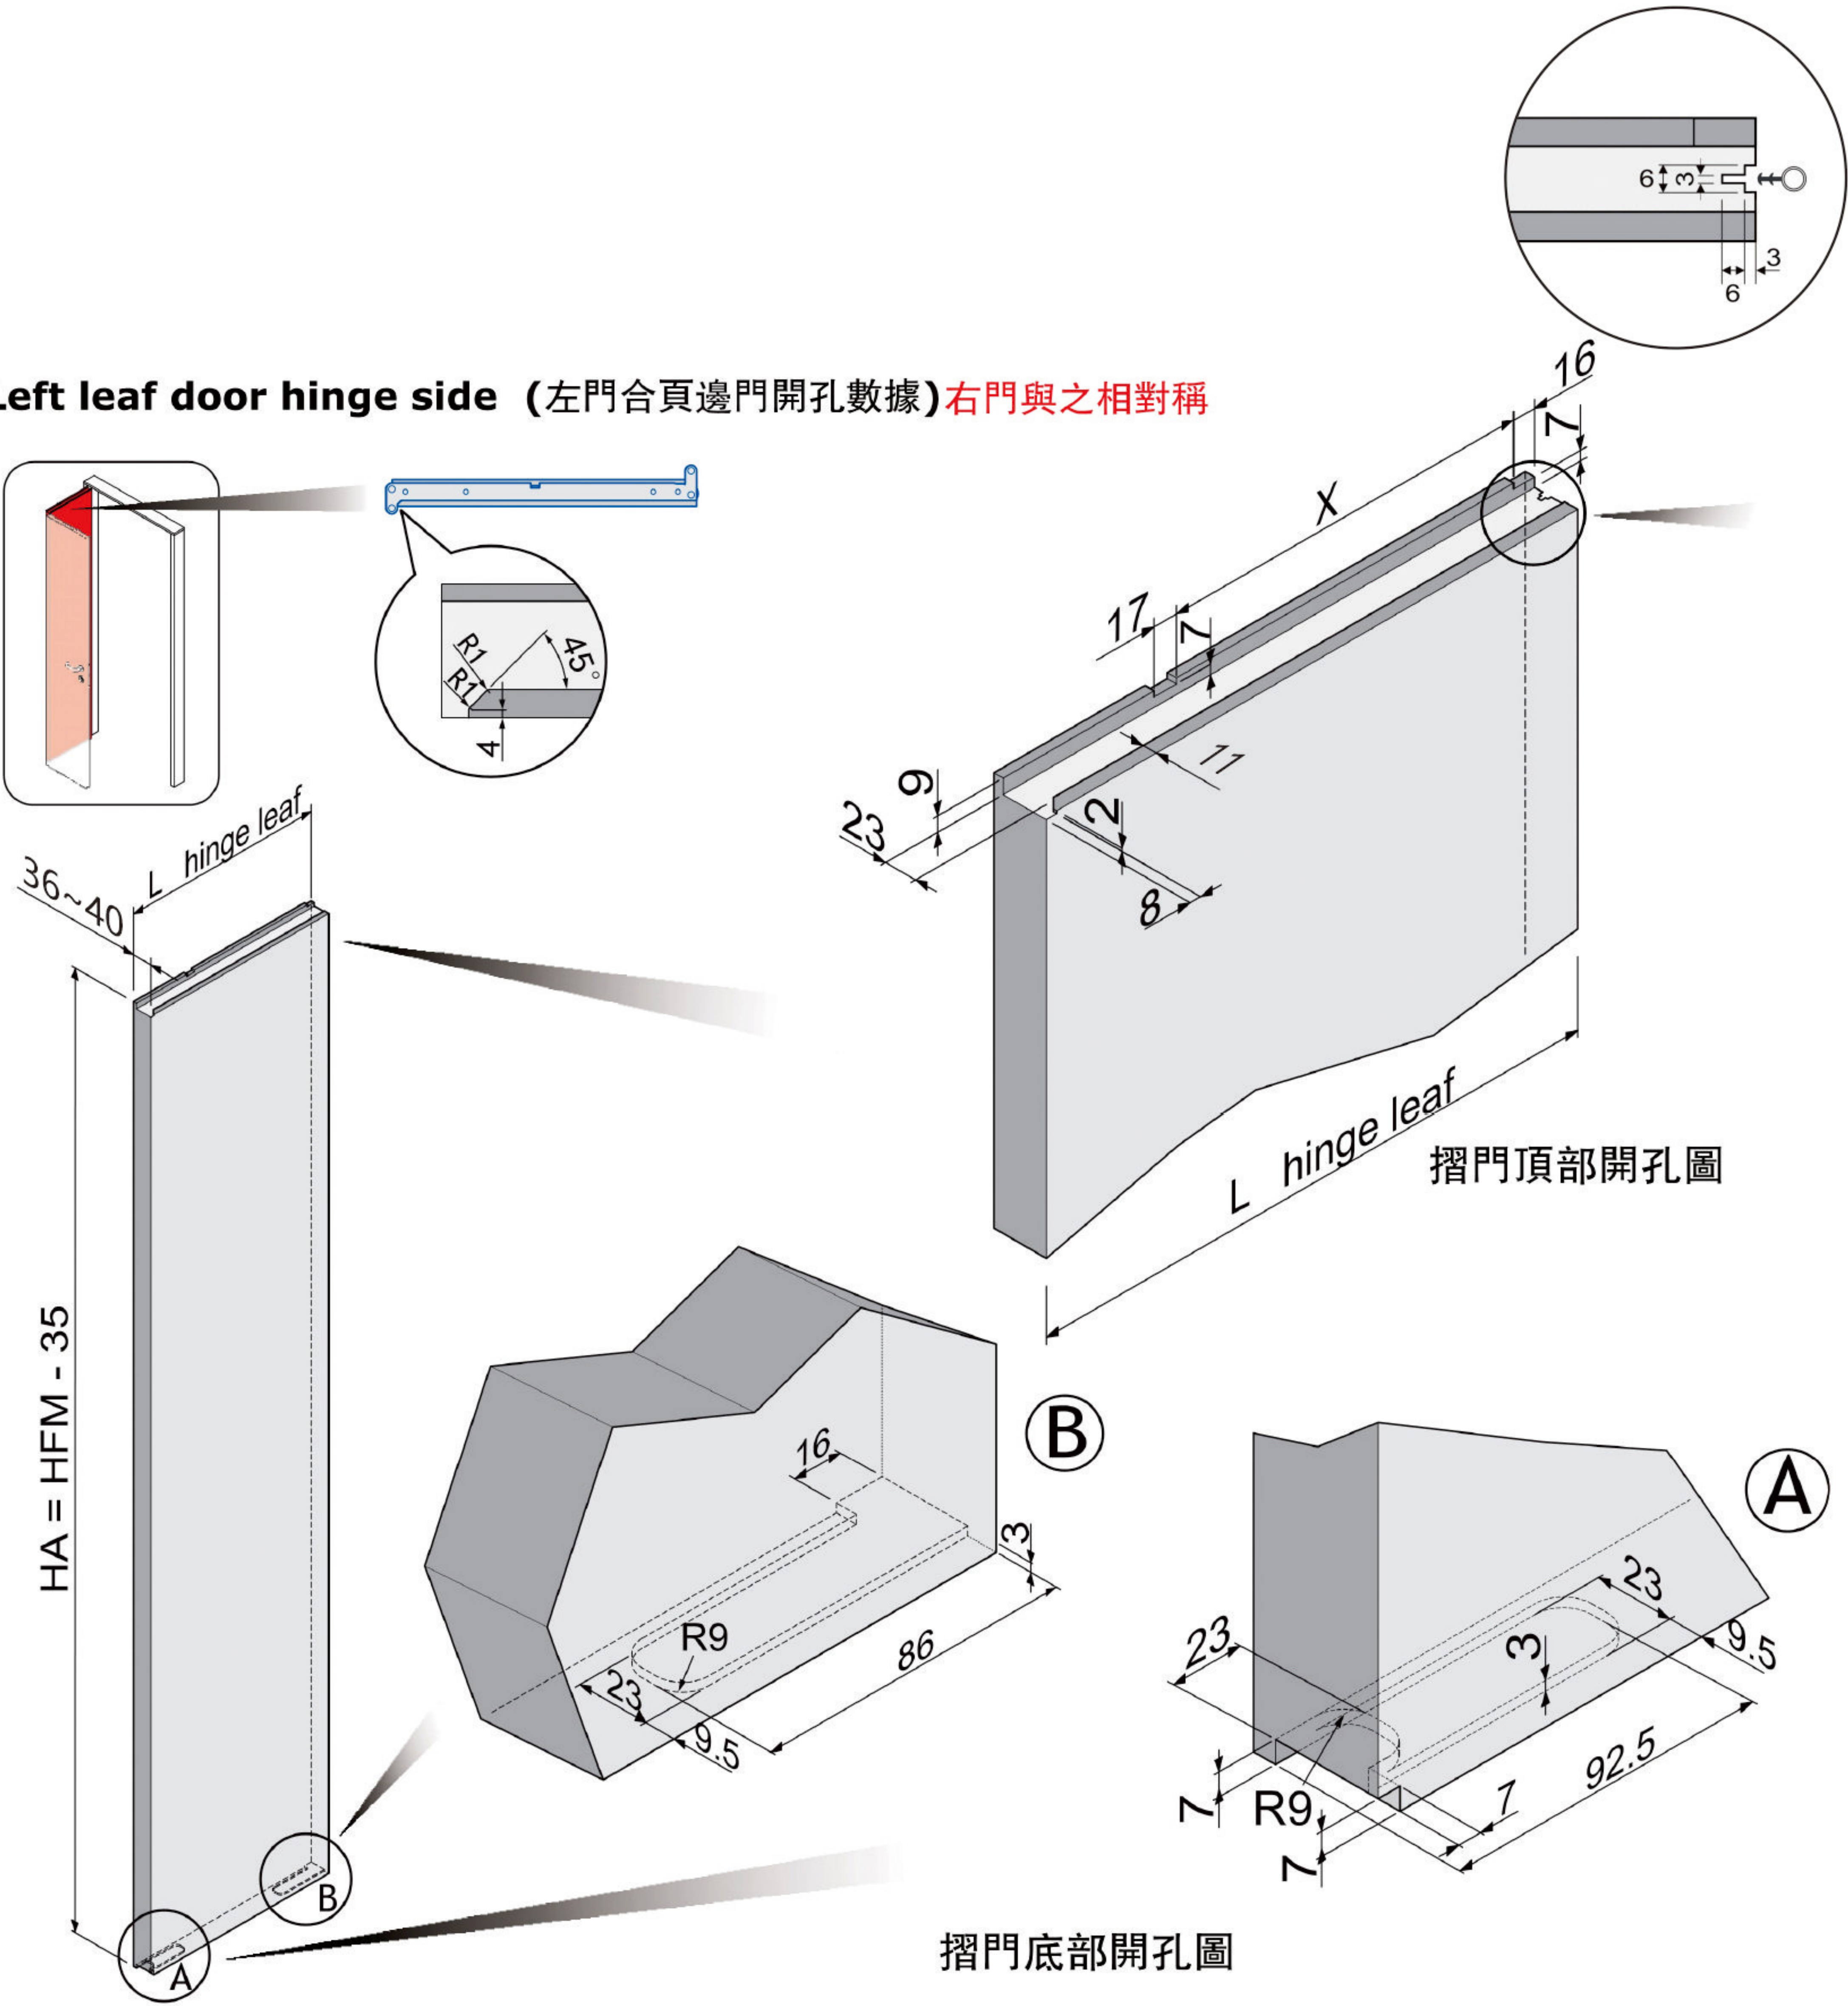


90°双折门系统 90 ° double folding door system

Left leaf door handle side (左門把手邊門開孔數據)右門與之相對稱

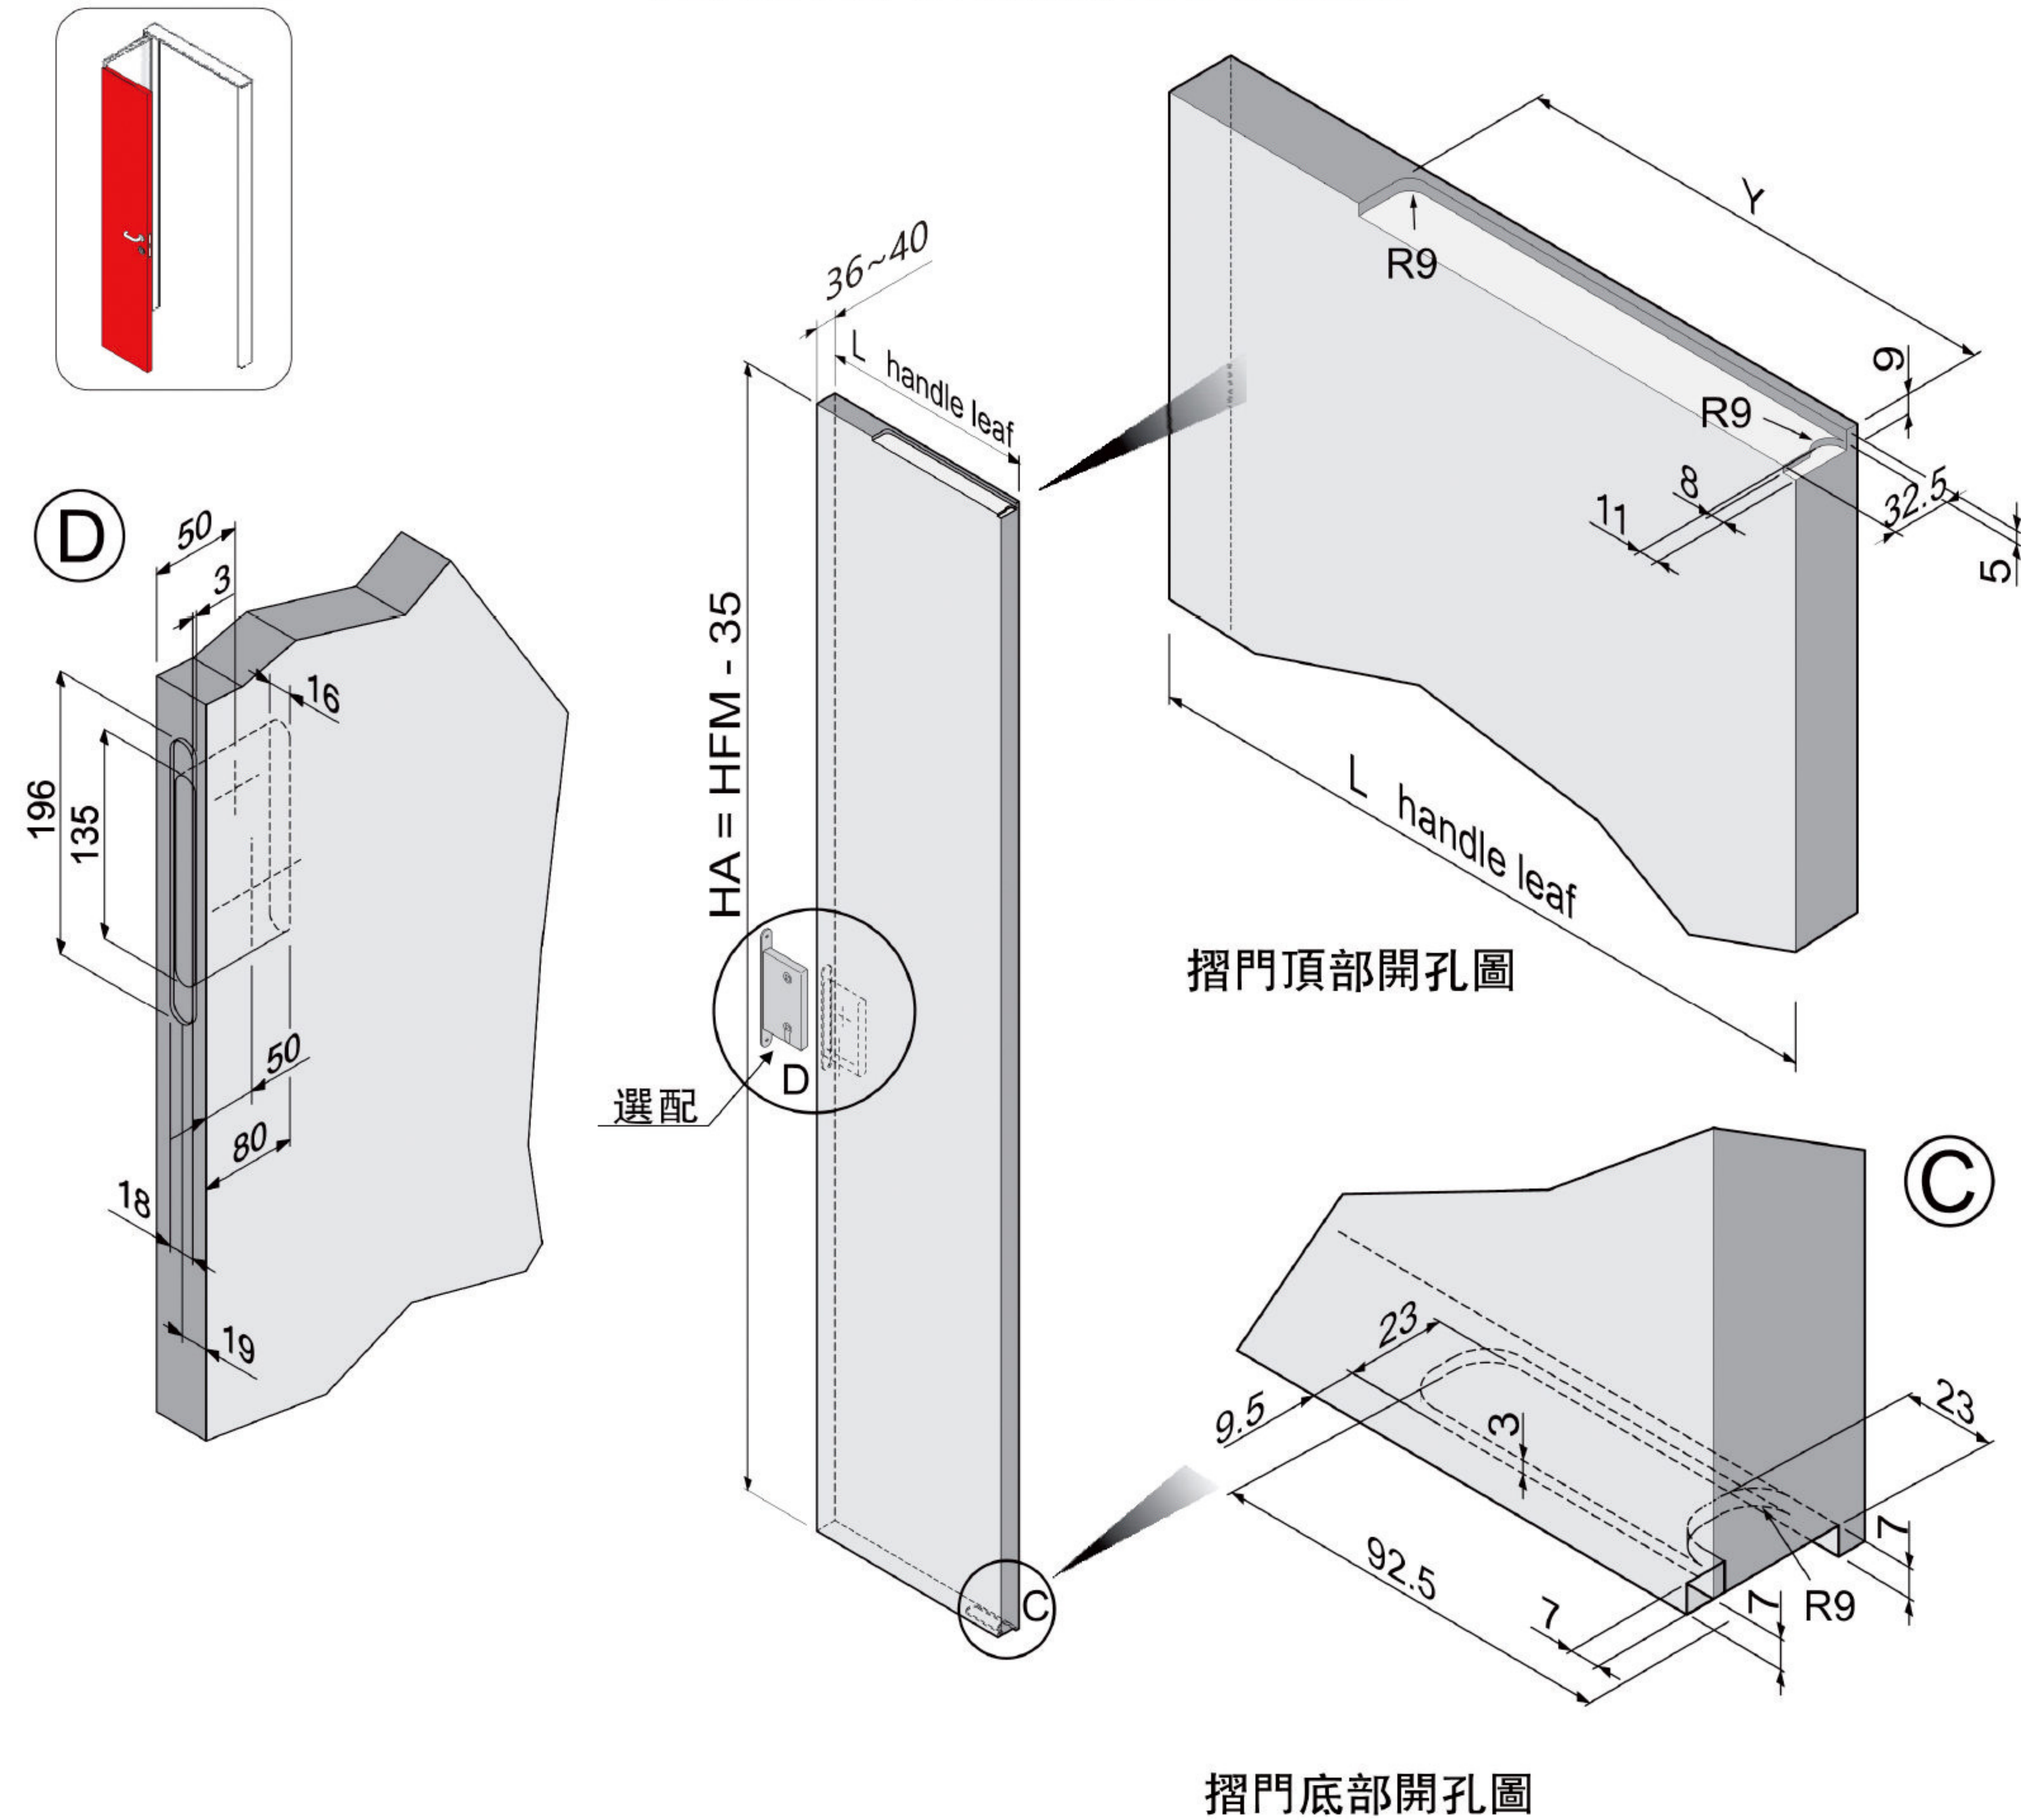


Door hardware mounting holes for both door systems (兩門上配件安裝開孔數據)

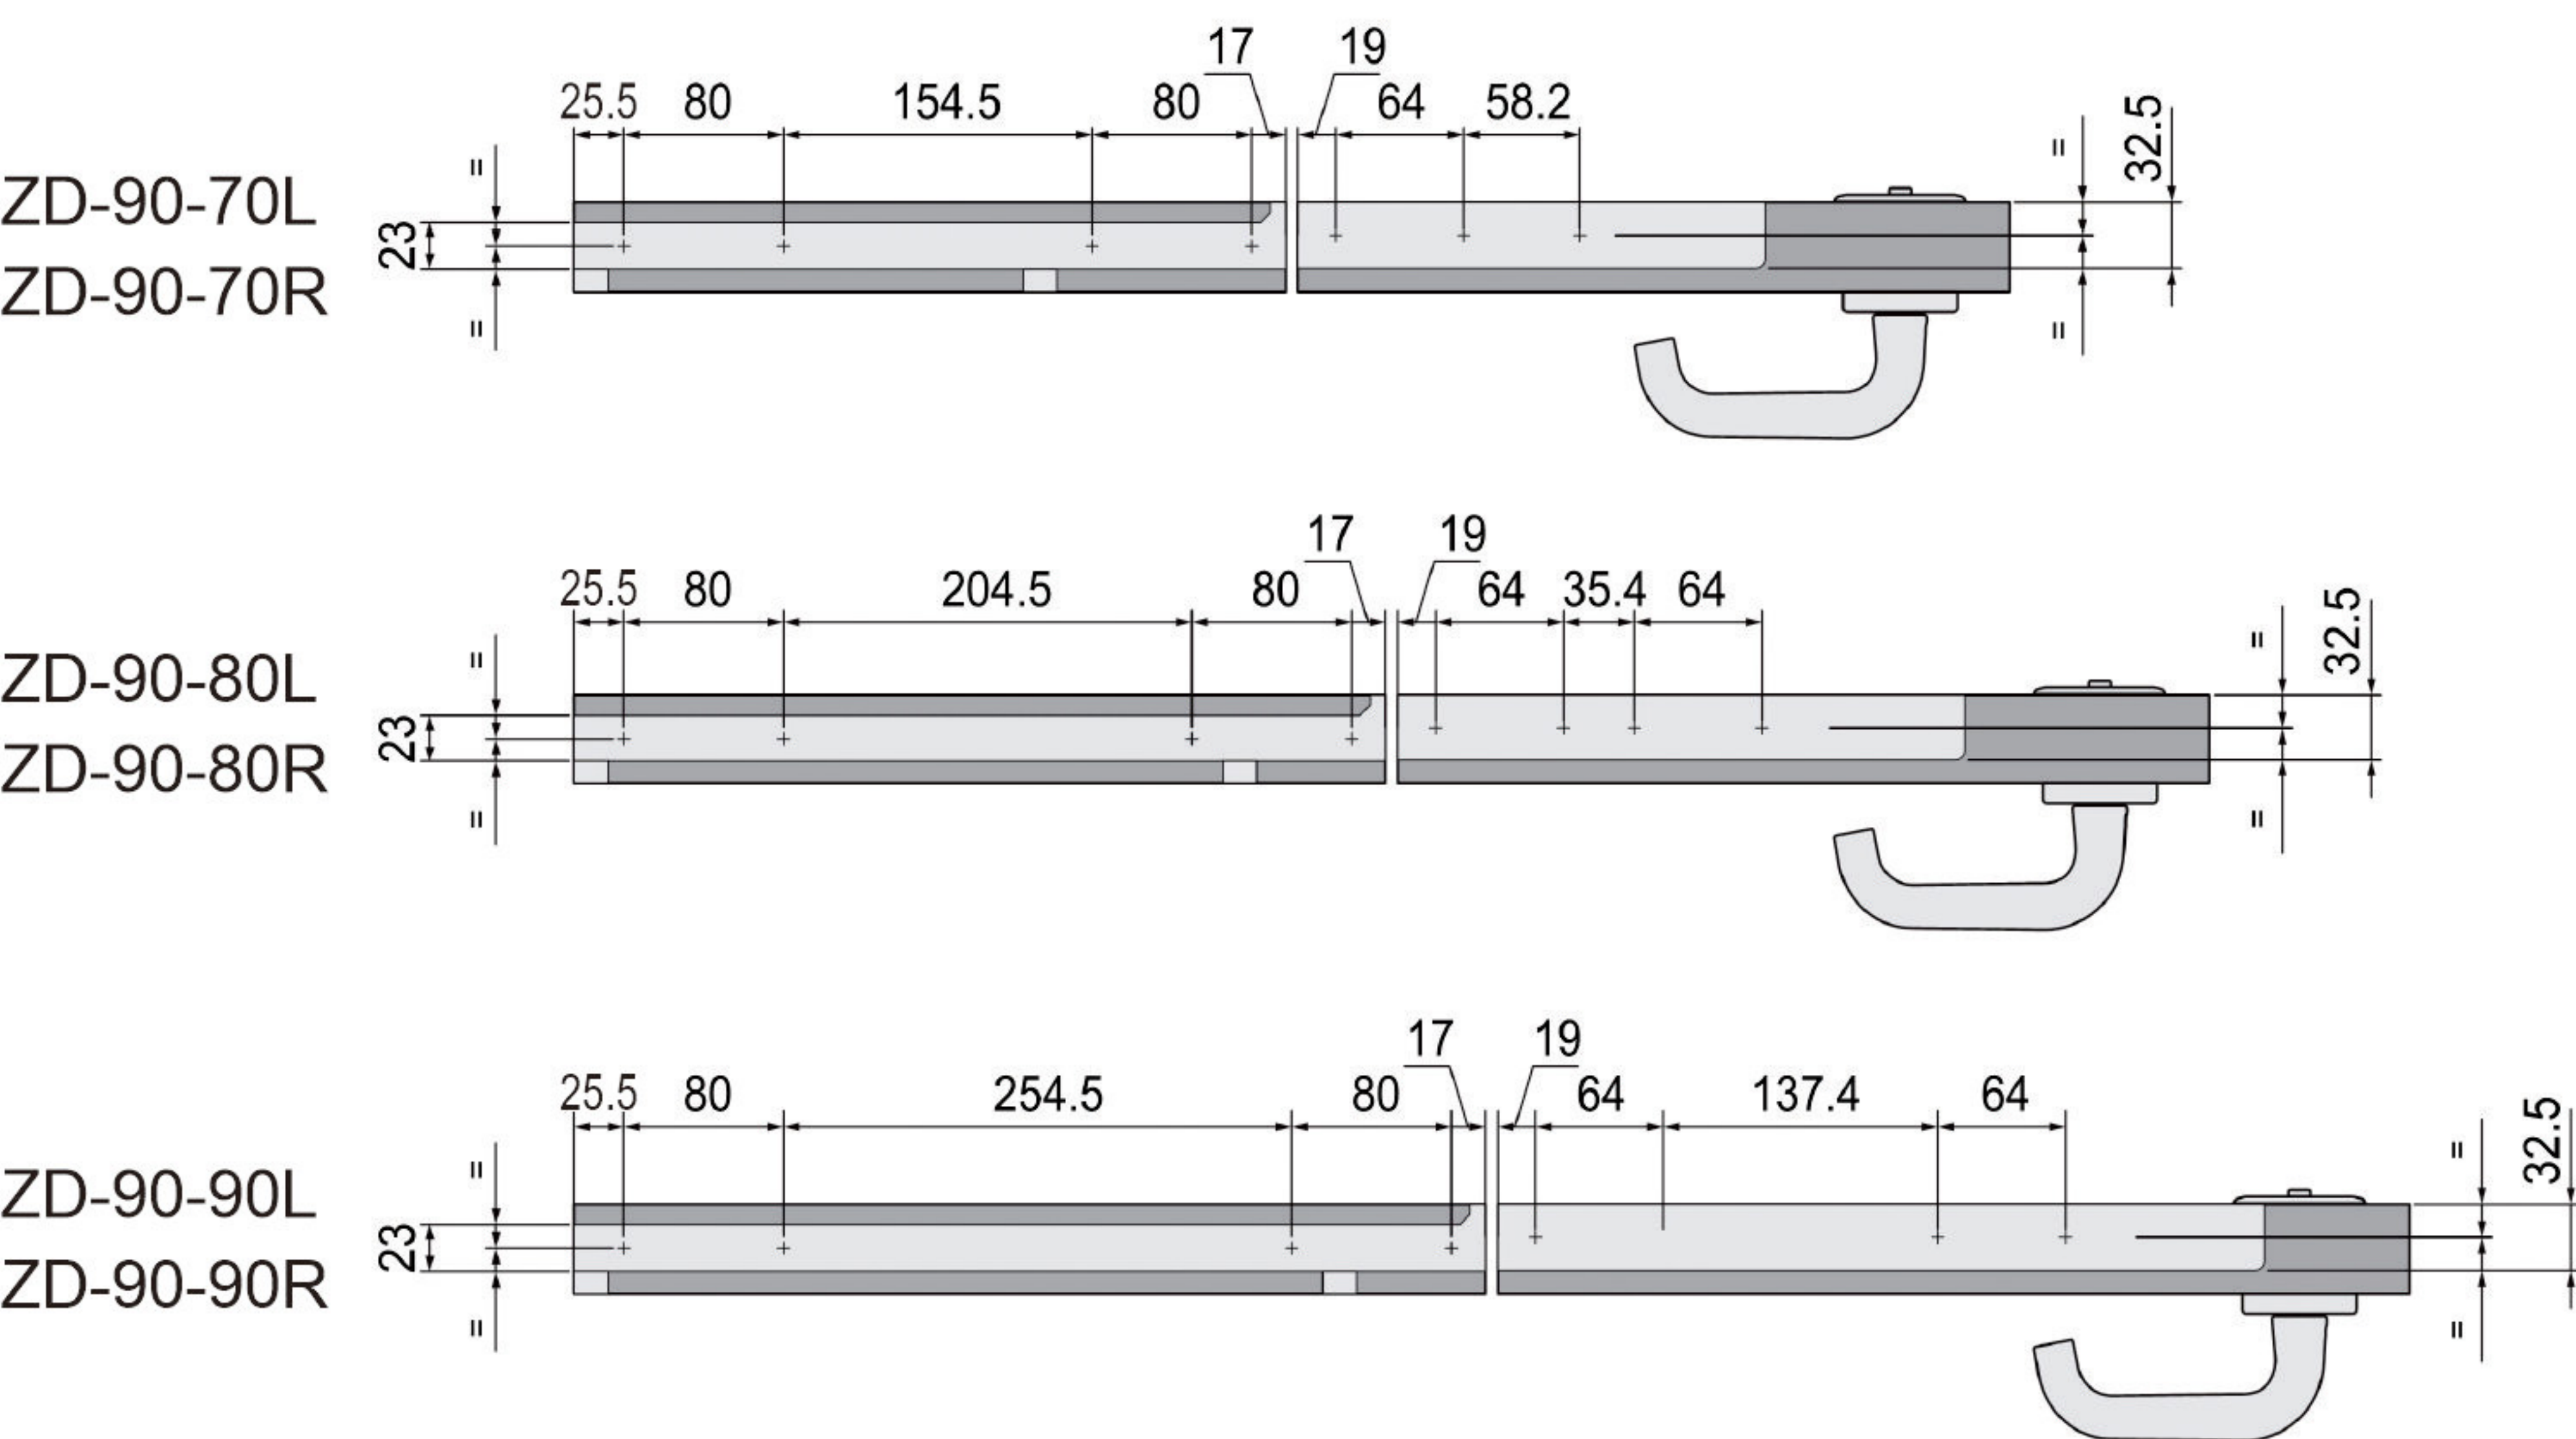


90°双折门系统 90 ° double folding door system

ASSEMBLING (安裝步驟)

1. According to steps ① ② ③ screw the fittings to the door panel , respectively.
按步驟① ② ③ 分別用螺絲固定配件在門板上

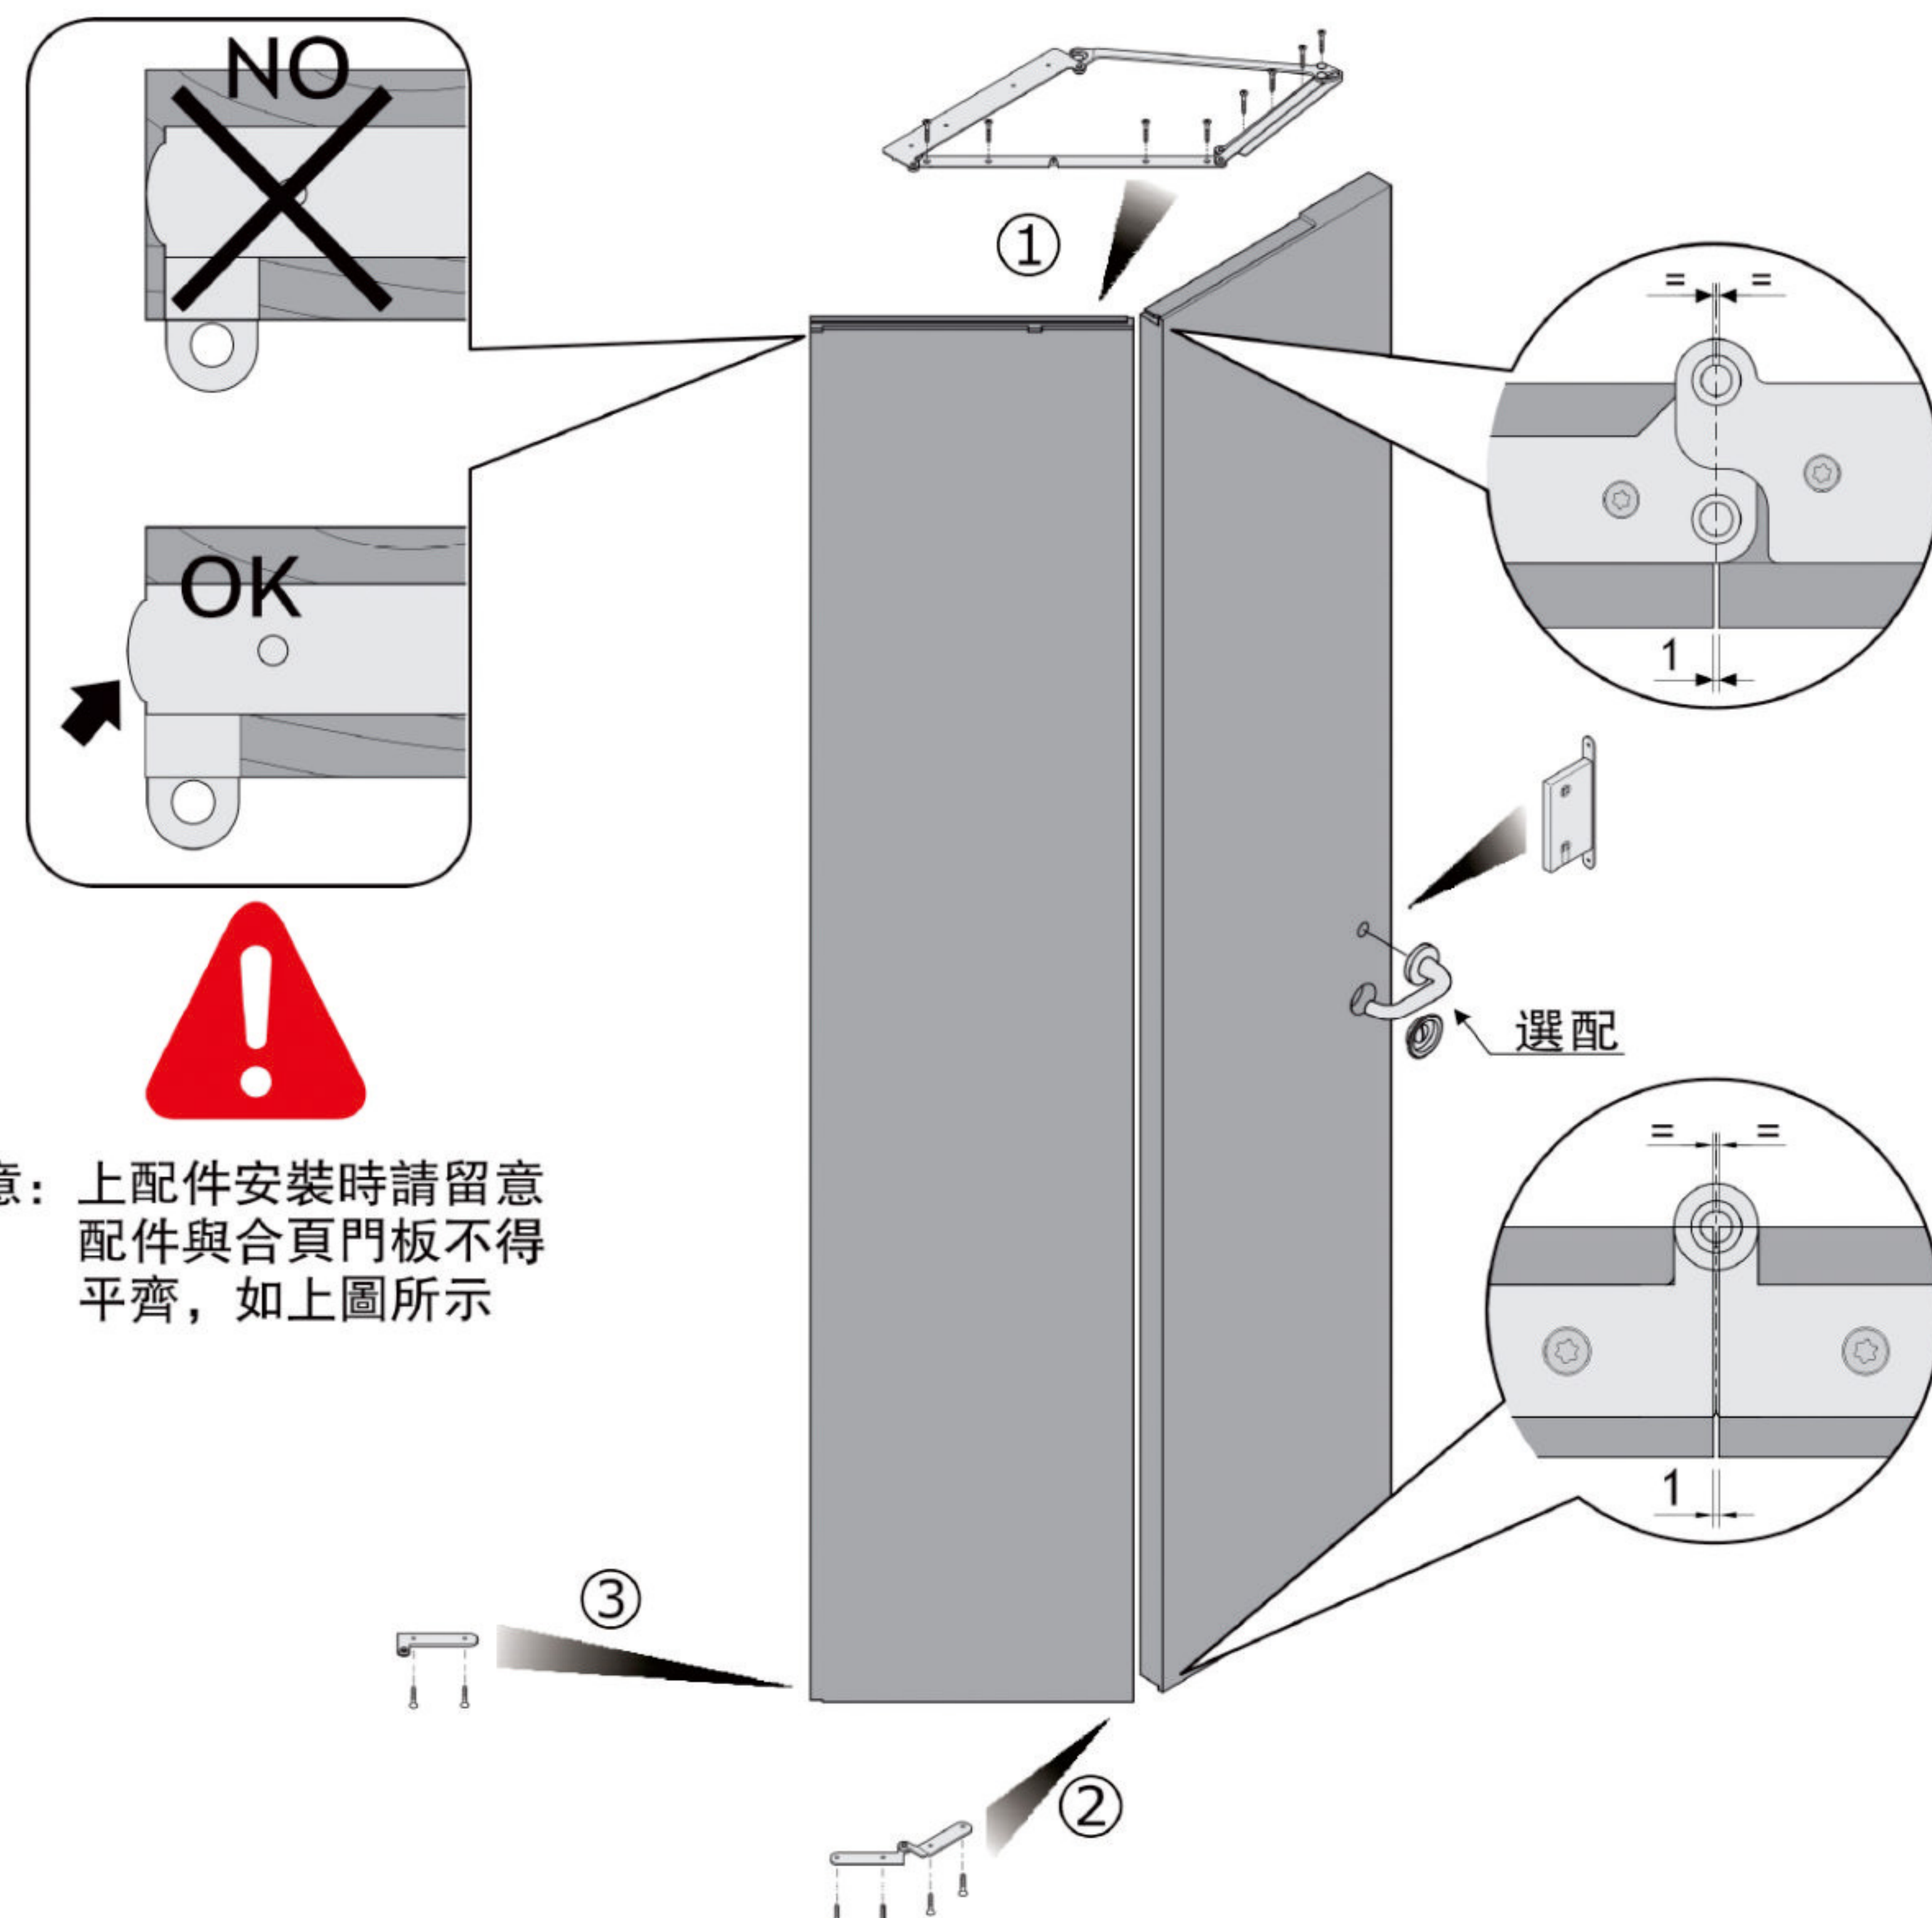

2. Screw the lower fittings and locking pieces(optional) to the door frame.
將下配件及鎖口片(選配)用螺絲固定在門框上

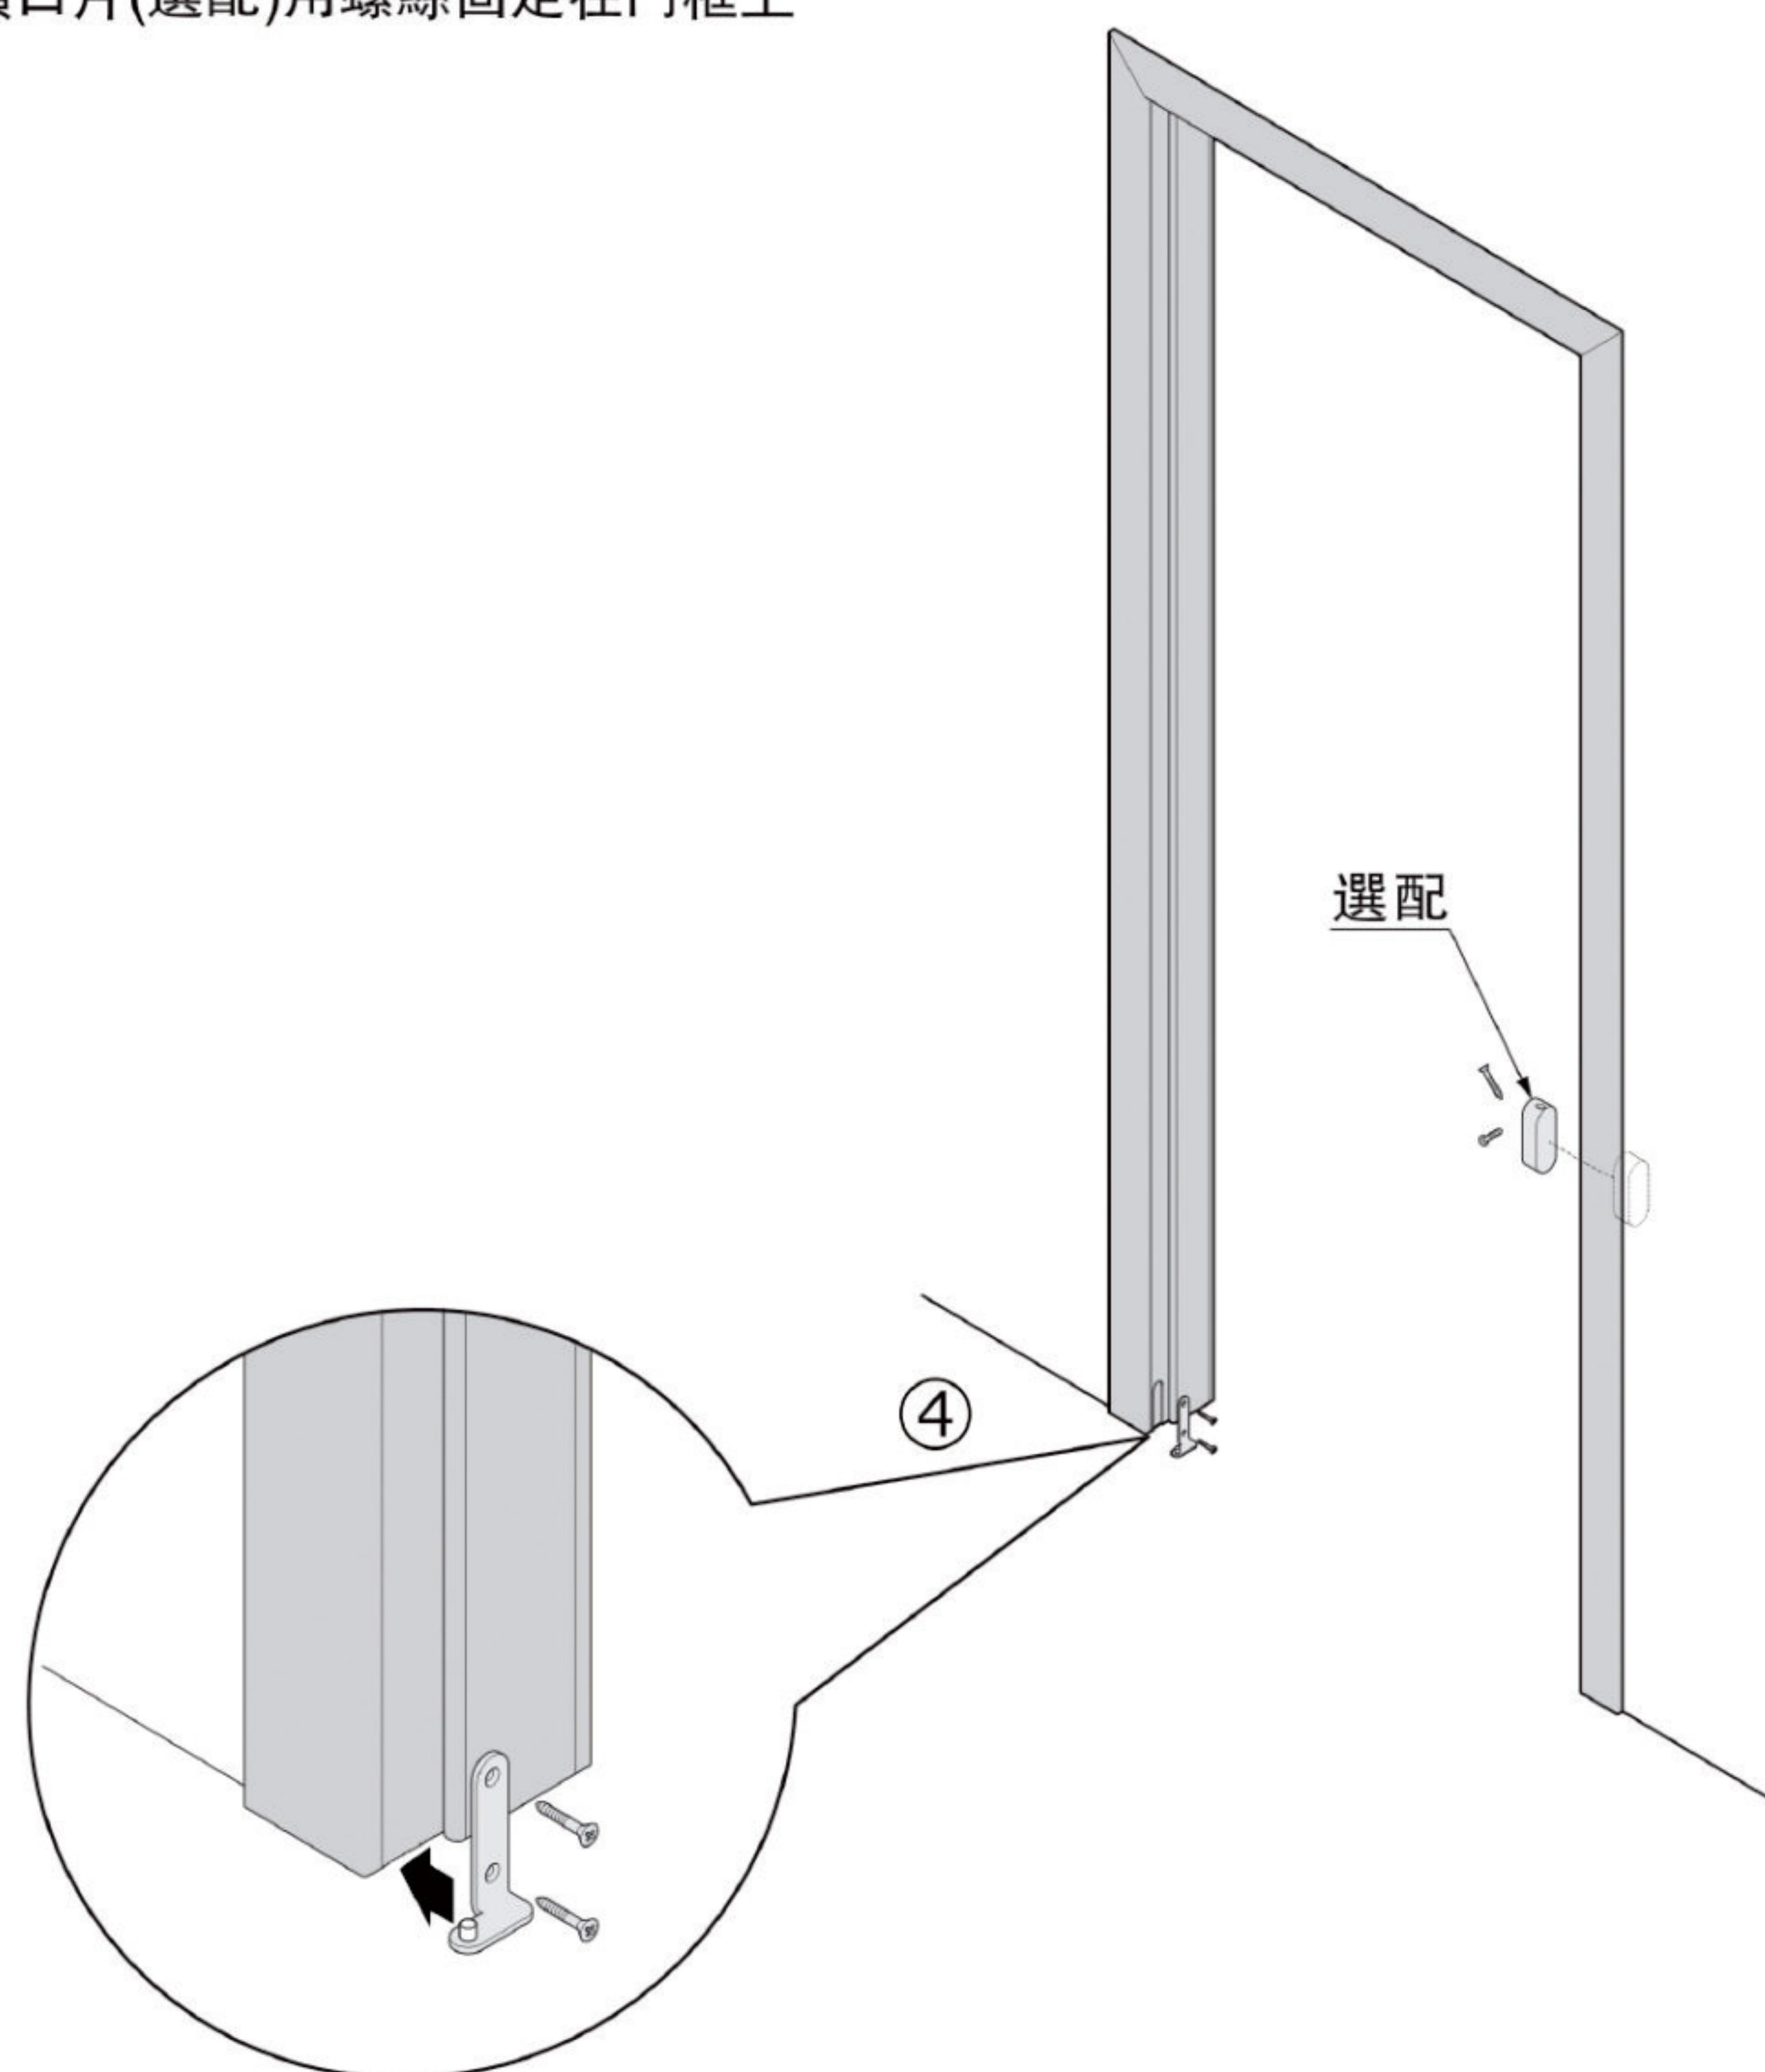

90°双折门系统 90 ° double folding door system

3. Place the lower door fittings in the lower door frame (Figure ⑥), push the folding door and upper fittings into the door frame and fix it (Figure ⑦).

將下門配件放入門框下配件中(如圖⑥)，把摺門及上配件推進門框并固定(如圖⑦)

